

# PULSAFEEDER®

The MicroVision Timer is a microprocessor-based selectable timer controller. Designed specifically for timer based control applications, MicroVision Timer comes standard with the features and functions you need for accurate timer based control. The MicroVision Timer is a full function controller in a compact package that won't break your budget!

## Features

- Large graphical display.
- Statistics screen with relay run time.
- Battery backup.
- Five digital inputs.
- Timer #1 output supports solenoid valve or motorized valve for bleed control.

## Controls

Programmable Timers	Timer 1	Timer 2	Timer 3	Timer 4	Alarm / Timer 5
Output Type	Relay 1	Relay 2	Relay 3	Relay 4	Dry Contact
28 Day	X	X	X	X	X
Pulse	X	X	X	X	X
Percent	X	X	X	X	X
Cycle	X	X	X	X	X
System Alarm					X

Programmable Inputs	Input 1	Input 2	Input 3	Input 4	Input 5
Drum Level	X	X	X	X	X
Water meter	X	X	X	X	X
Hall effect	X				
Flow					X

- **Timer 1**
- **Timer 2**
- **Timer 3**
- **Timer 4**

## Programmable Inputs

- Drum level inputs
- Water meter inputs
- Hall effect input

## Programmable Timers

- Output type
- 28 day
- Pulse
- Percent
- Cycle
- System Alarm

## Operating Benefits

- Easy to use.
- Can be programmed in
  - Pulse mode
  - Percent mode
  - 28 day biocide timer mode
  - Cycle mode
- Easy Installation.
- Two year warranty.
- Compact size saves space and freight charge.



## Aftermarket

- Solenoids
- Motorized Ball Valves
- Water Meters
- Corrosion Coupon Racks
- Metering Pumps (PULSATron, XP Series)



# Timer Micro Vision Programmable Timer Controller

(866) 433-6682 • (281) 359-8538 • sales@novatech-usa.com • www.novatech-usa.com

# MicroVision <sup>Timer</sup> Programmable Timer Controller

## Specifications and Model Selection

MicroVision Timer Selection Guide		MVT	-	-	-	-
PRODUCT DESIGNATOR Position 1, 2 & 3	MVT	= MicroVision Timer Controller				
VOLTAGE Position 4	1	= 115 volt				
	2	= 230 volt (no prewired power cord or relays available)				
POWER WIRING Position 5	X	= Liquid Tite connections only (required for 230VAC)				
	P	= Prewired w/Power Cord and Pigtails for 115 VAC				
PANELS Position 6	X	= No Panel and No Flow assembly				
	F	= Flow assembly, No Panel				
	A	= Standard Panel & Flow Assembly				
	B	= Panel & Flow Assy, 1 Pump Mount, strainer, inj tee & rails				
	C	= Panel & Flow Assy, 2 Pump Mount, strainer, 2 inj tees & rails				
	D	= Panel & Flow Assy, 3 Pump Mount, strainer, 3 inj tees & rails				
SUFFIX CODE Position 7 thru 13	XXX	= Suffix Code				
	CZ_XX	= CE Approval (CZXXX=Europe; CZUKXXX=UK; CZSUIXXX=Switzerland/Liechtenstein)				

A completed model should look like "MVT1PB-XXX"


### Engineering Data Controller

Enclosure:	NEMA 4X / IP65
Power Supply:	90VAC / 50/60Hz / 5A 250 VAC / 50/60Hz / 5A
Control Output:	2 Amps max
Display:	LCD
Language:	English

### Engineering Data Flow Switch

Maximum Temperature:	122°F / 50°C
Maximum Pressure:	125 PSI (8.6 BAR)
Activate Flow Rate:	Approximately 1 GPM / 3.78 LPM
Materials of Construction:	PVC and Glass filled Polypropylene

### Dimensions

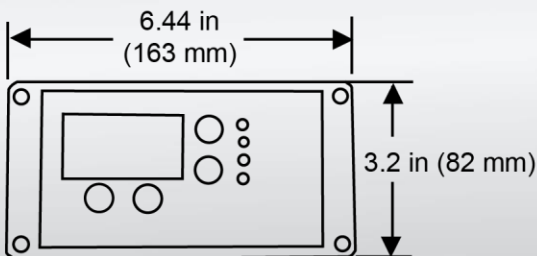

### Custom Engineered Designs – MicroVision Panel Mount



#### Systems

Pulsafeeder's MicroVision Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.

**novatech**  
INTERNATIONAL

sales@novatech-usa.com  
www.novatech-usa.com  
Tel: (866) 433-6682 Fax: (866) 433-6684  
Tel: (281) 359-8538 Fax: (281) 359-0084

**PULSAFEEDER**

27101 Airport Road  
Punta Gorda, FL 33982  
Phone: ++1(941) 575-3800  
Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

MVT001 G15

**IPEX**  
FLUID & METERING