



, a ditter i

Volume 20.5

Table of Contents

Everything you need for a well stocked laboratory or educational environment



- 4 Laboratory Equipment
- **18 Sampling & Testing Instruments**
- 46 Workstation Essentials
- 57 Glassware
- 64 Sample Collection & Transport
- 74 Liquid Sample Handling
- 88 Sample Handling
- **100** Tubes & Vials

- 103 Tube Racks & Storage
- **122 Cold Products & Storage**
- 138 Microscopes, Slide Storage and Accessories
- **149 Safety Products & Dispensers**
- 158 Sealing & Labeling
- **167 Charts & References**

Laboratory Equipment

High-quality equipment and instruments for a vast range of protocols



Centrifuges Stirrers Mixers Shakers

MagFuge[®]

A high-speed mini centrifuge and magnetic stirrer in one unit

Holds 5.0 mL

Tubes

High-Speed Mini Centrifuge

High-speed Centrifuge is easy to use and designed to deliver maximum speed (12,500rpm/9,783x q) and flexibility with rapid acceleration and fast controlled breaking

Ideal for most protocols requiring fast spins including PCR, micro- filter cell separation and HPLC. Versatility to handle 0.2, 0.5, 1.5, 2.0 and 5.0 mL tube sizes

Intuitive One-Dial Programming

- Set speed and time with ease:
- Adjustable speed from 500 to 12,500 rpm
- Speed setting for RPM or RCF
- Adjustable time from 30 seconds to 60 minutes

Safe to Use

- Safety features help ensure it will not operate when the lid is open, a rotor is jammed, or the unit is out of balance

ltem No.	Color	L x W x H in	L x W x H cm
120581	Grey/Purple 🔳 🔳	0.0 × 7.0 × 4.7	00 E y 10 E y 10
120582	Grey/Blue	— 9.2 x 7.3 x 4.7	23.5 x 18.5 x 12
Replaceme	nt parts		
120622	MagFuge® Rotor, 12 x 1.5/2.0 mL tube		
120623	MagFuge [®] Rotor, 6 x 5.0 mL tube		
120624	MagFuge® Stirrer Rotor		
120682	MagFuge® Silicone Mat		
120527	Power Adapter		
120015	Tube Adapters, 0.2 mL, 0.5 mL, Pack of 12 (6 ea.)		
HS100502	Universal Power Cord Set		

Community Design No. 003515337-0001-0002 Euro. Pat. App. 3 246 088 CE

US Design Patent No. D814,045 US Patent No. 10471439

Two Units in One!

Ma

Magnetic Stirrer

High-performance Magnetic Stirrer is designed using high quality rare earth magnets creating a robust magnetic coupling that significantly reduce the chance of spin-outs

Perfect for work with sensitive samples and protocols up to 3L requiring aggressive mixing for full dilution

Easy to Use

- Set stir mode, speed and time with easy one-dial programming:
- Select Mode: clockwise, c. clockwise and oscillate
- Adjustable speed from 50 to 2,500 rpm
- Continuous and adjustable time settings from 30 seconds to 60 minutes

Durable Accessories Included

- Re-usable, easy to clean silicone mats included to keep vessel stable and prevent spills and two NdFeB stir bars (40 x 12 mm) with chemical resistant PTFE coating included

Package Includes			
Centrifuge/Stirrer	Stirrer Rotor	12 Tube Adapters 0.2 mL & 0.5 mL	
5.0 mL Tube Rotor	2 Stir Bars, 35 m	ım x 12 mm, cylindrical shape	
1.5/2.0 mL Tube Ro	tor 2 Silicone Mats f	or Stirrer Lid	
1 Low Voltage, Doul	ble Insulated Power Adapt	er (100-240 VAC, 50/60 Hz) with 4	
Interchangeable Plu			
Specifications: Ce	ntrifuge		
Speed Range	500 – 999 rpm (increments of 1); 1,000 – 5,000 rpm (increments of 5); 5,000 – 12,500 rpm (increments of 25)		
RCF	16 – 9,783 x g (max RCF calculated)		
Run Time Ranges	30 seconds – 60 minutes (5 second increments)		
Specifications: Ma	gnetic Stirrer		
Speed Range	50 – 999 rpm (increments of 1); 1,000 – 2,500 rpm (increments of 5)		
Run Time Range	Stirrer Mode	30 seconds to 60 minutes or continuous (5 second increments)	
	Oscillating Stirrer Mode	1 second – 60 minutes or continuous	
	Oscillating Period	30 seconds – 15 minutes	
Capacity	3 L plus, Diameter of vessel not to exceed 130 mm		

Tel: (866) 433-6682

(1) VROHS

X

Powerful Centrifugation in Compact Bench-Top Size...

Superb Function

- Powerful, Adjustable Speed (500 to 6,000 RPM) can be set in RPM or RCF
- Programmable with memory for up to 8 programs
- Adjustable time (30 seconds to 60 minutes or continuous)
- Rapid acceleration and gentle electronic braking (deceleration time of <60 seconds)
- Digitally controlled brushless motor for accurate speed control and no motor maintenance required

Optimal Design

- Easy to read Digital back-lit display
- Tool-less rotor removal for convenient loading and cleaning
- Clear lid/Viewing porthole to allow non-contact speed verification by non-contact tachometer
- Bench-top size, compact footprint for workspace use allows user to see rotor movement for added visual safety
- Includes automatic shut-off feature for sample imbalance and tilt

Built-in Safety

- Safety features help ensure it will not operate when the lid is open, unit is jammed or unit is out of balance
- Manual lid unlock allows users to open lid in case of a power failure and prevents loss of samples



Tube Adapter Sleeve with **Tube Spacers**

E

Specifications			
Speed Range	500 – 6,000 rpm		
RCF	4,668 x g (max RCF calculated) with typical 15 mL tube		
Capacity	8-place 15 mL tube rotor: 120 mL total maximum liquid volume		
Run Time Ranges	30 seconds – 60 minutes or continuous		
Weight	4.5 kg (9.93 lb)		
Operating Temp.	Range 2°C to 40°C		
Max. Relative Humidity	Non-condensing, 80% for temp up to 31°C decreasing linearly to 50% R.H. at 40°C		
Electrical	Meets global power and efficiency requirements with grounded cord sets for NA, Japan, EU, UK and Australia		
Power Adapter	Input	100-240 VAC, 2.5A, 50/60 Hz	
Rating	Output	12 VDC, 12.5 A, 150W	
	Input	12 VDC	
Centrifuge Rating	Current (Under load)	Approx. 7.7 A	
	Power	Approx. 93W	
Certifications	CE		

Provides large clearance for open access to the rotor and tubes for easy load/

> Rotor fits a multitude of tube sizes with the included tube adapters and spacers

- 3 10 mL Blood Collection Tubes
- 5 mL MicroCentrifuge Tubes
- 15 mL Conical Centrifuge Tubes

I

(

Package Includes
Clinical Centrifuge
8-Place Rotor
8 Tube Adapters
24 Tube Spacers
1 Low Voltage, Double Insulated Power Adapter (100-240 VAC,
50/60 Hz) with 4 Interchangeable Plugs

Tel: (866) 433-6682

www.novatech-usa.com

7

... Tailored for Clinical and General Applications

General Purpose Centrifuge

Powerful centrifugation for Mid to Higher volume centrifugation requirements. Ideal for a wide range of Laboratory & Testing sites, including:

Quality Control _

_

_

- Environmental Science - Pharmaceutical Research Forensic Science
- Chemical & Industrial Clinical Diagnostics _
- Food & Beverage _
- -Microbiology
- Protein Chemistry
 - Cellular & Molecular Biology

Applications include: - Clinical chemistry

- Blood collection prep Immunology Clinical microbiology
 - Blood banking - Pathology







U.S. Design Patent D814.045

Item No.	Color	L x W x H in	L x W x H cm
120964	Grey/Blue	- 14 x 11.5 x 5.8	36.6 x 29.3 x 14.8
120963	Grey/Purple 🔳 🔳	14 X 11.5 X 5.0	50.0 X 29.5 X 14.0

Replacement Parts		
120779	Clinical Centrifuge Power Adapter	
120781	Clinical Centrifuge Replacement Rotor	
120783	Clinical Centrifuge Tube Adapters (8) and Spacers (24)	

Clinical Centrifuge

Powerful bench-top centrifugation for clinical use in stat labs, medical clinics and offices, veterinarian offices, hospitals and education

IVDR Designation

-Class A, Rule 5a (Article 47, Annex VIII) per IVDF 2017/746

Applications include:

- _ Clinical chemistry
- _ Clinical microbiology
- Blood collection prep Immunology - Blood banking - Pathology





U.S. Design Patent D814,045 LxWxH LxWxH Item No. Color in ст 120776 Grey/Blue 14 x 11.5 x 5.8 36.6 x 29.3 x 14.8 120775 Grey/Purple

Replacement Parts		
120779	Clinical Centrifuge Power Adapter	
120781	Clinical Centrifuge Replacement Rotor	
120783	Clinical Centrifuge Tube Adapters (8) and Spacers (24)	

8



Quick-spin Button for momentary spin requirements, press and hold to

operate, release to end spin cycle

Gusto® High-Speed Mini Centrifuge

Maximum speed with minimal space

This compact centrifuge is ideal for protocols calling for fast spins with a higher RCF requirement

Made of durable ABS with UV-Resistant coating

User Friendly

- Intuitive Push button programming and bright LCD screen make it easy to use

Quiet Operation

- Brush-less motor enables quiet operation and low vibration

Safety Features

- Lid safety feature prevents opening while rotor is turning and clear polycarbonate allows user to see rotor movement for added visual safety
- Includes automatic shut-off feature for sample imbalance and tilt

Item No.	Color	L x W x H in	L x W x H cm
HS10050	Blue	8 x 6.7 x 4.5	20.3 x 17.1 x 11.4
Replacemer	it parts		
HS100502	Universal Power Cord Set		
HS100503	Gusto® Rotor 12 x 1.5/2.0 mL Tube (with Cover and Knob)		
HS100504	Gusto® Rotor 4 x 8 Strip 0.2 mL Tube (with Knob)		
120015	Tube Adapters, 0.2, 0.5 mL, Pack of 12 (6 ea.)		
HS100506	Gusto® Rotor Cover (for 12 x 1.5/2.0 mL Tube Rotor Only)		
120527	Power Adapter		

Specifications	
Speed Range	500–12,500 rpm
Run Time Ranges	1 to 30 minutes
RCF	15 - 9,783 x g (max RCF calculated)

Package Includes
Gusto® High-Speed Mini Centrifuge
12-Place 1.5/2.0 mL Tube Rotor
32-Place 0.2 mL Tube Rotor (singles, or 4 x 8 Strip)
12 Tube Adapters 0.2 mL
12 Tube Adapters 0.5 mL
1 Low Voltage, Double Insulated Power Adapter (100-240 VAC, 50/60 Hz) with 4 Interchangeable Plugs

Tel: (866) 433-6682

www.novatech-usa.com

9



Sprout[®] Plus Mini Centrifuge

Mini but Mighty - ideal for small runs

Easy to Use

Tool-free SnapSpin rotors and quick-spin options make the centrifuges fast and easy to use

Ergonomic Design

- The lid was functionally designed to fit in the palm of the hand for one handed lock and unlock allowing for quick tube extraction
- _ Large lid size accommodates longer and skirted tubes and tall tube lids
- The housing is made from ABS plastic and lid is polycarbonate plastic enabling the unit to be easily cleaned

Safety Measures

Sprout[®] Plus Item No.

120610

120611

HS100012

120148

120491

120015

- Fitted with a braking function, the unit quickly stops spinning when powered off or when lid is opened
- A weighted, rubberized base eliminates potential movement and dampens vibration and noise



g function, the unit quickly stops spinning	Specifications			
r when lid is opened	Speed Range	Approx. 6,000 rpm (fully loaded)		
zed base eliminates potential movement	RCF	2,000 x g		
ion and noise		(€ û ✔₽₽₽₽₽₽ ₩ 🗵		
	L x W x H in	L x W x H cm		
Green 📕	6 x 5 x 4.3	15.3 x 12.8 x 10.9		
Blue	0 1 3 1 4.3	13.3 × 12.0 × 10.9		
S				
Sprout [®] Plus Rotor SnapSpin 6 x 1.5/2.0 m	L Tube			
Sprout [®] Plus Rotor SnapSpin 2 x 8 Strip, 0.	.2 mL			
Sprout® Plus Lid O-Ring, <i>Pack of 10</i>				
Sprout [®] Plus Power Adapter				
Tube Adapters, 0.2 mL, 0.5 mL, Pack of 12	' (6 ea.)			
•				

Package Includes

Sprout [®] Plus M	lini Centrifuge
6-Place 1.5/2.0) mL Tube Rotor
16-Place 0.2 m	nL Tube Rotor (singles, or 2 x 8 strip)
6 Tube Adapter	s 0.2 mL
6 Tube Adapter	s 0.5 mL
4 Lid O-Rings	
Storage Case fo	or Rotors and Adapters
Tube Rack	
0,	Double Insulated Power Adapter (100- 0 Hz) with 4 Interchangeable Plugs

Accessory Kit Included

Need tubes?

Replacement parts HS100011

See our portfolio of 0.2 mL, 0.5 mL, 1.5 mL Microcentrifuge Tubes



Tel: (866) 433-6682

www.novatech-usa.com

Specially Designed Inserts seat the centrifuge, all its accessories, and includes a tube rack



Portable Centrifuge Kit

Spin samples on-the-go

The Portable Centrifuge Kit offers a convenient way to spin down and prepare samples outside of a conventional laboratory environment

Immediate Field Processing

- Process samples in remote areas before deterioration can take place
- Allows for immediate on-site testing for faster results
- Made of durable ABS plastic for easy clean in field environments

Easy to Use

- Centrifuge is equipped with tool-less SnapSpin rotors for easy change out
- Simple operation with lock/unlock activation

Portable Convenience

- All items in kit are housed in a handled DuraPorter[®] Transport Box for portability
- The handled box has an air-tight seal for optimal sample protection

See page 66 to learn more about the DuraPorter® Transport Box

item no.			
120568	Portable Centrifugation Kit, 100-240 VAC, 50/60Hz Universal Plug + 12V Car Adapter		
120569	Portable Centrifuge Transport Case with Inserts - Only		
120570	12V Sprout® Plus Centrifuge Car Adapter*		
	*Adapter can be used with Sprout® Plus Mini Centrifuge		



12-Volt Car Adapter for on-the-go testing

Package Includes

1	Sprout® Plus Mini-Centrifuge
	6-Place 1.5/2.0 mL Tube Rotor
	16-Place 0.2 mL Tube Rotor (singles, or 2 x 8 strip)
	6 Tube Adapters 0.2 mL
	6 Tube Adapters 0.5 mL
	4 Lid O-Rings
	Storage Case for Rotors and Adapters
	Tube Rack
	1 Low Voltage, Double Insulated Power Adapter (100-240 VAC, 50/60 Hz) with 4 Interchangeable Plugs
	DuraPorter® Transport Box
	Tube Rack Insert
_	(12-Place 1.5/2.0 mL, 14-Place 0.2 mL)
_	Transport Box Dividers
_	Sprout [®] Plus Cradle
P	Portable 12V Sprout® Plus Centrifuge Car Adapter

See page 9 for functional details on the Sprout® Plus

www.novatech-usa.com

Magnetic Induction Stirrer

Strong, motor-less and maintenance free

Superior Functional Design

- Advanced magnetic coil technology drives the spinning of the stir bar maintaining continuous, constant speed for reproducible results
- Magnetic coupling is optimized by using alternating current (AC) as its driving force strong enough to stir viscous solutions
- Motor-less operation generates minimal heat ideal for stirring temperature sensitive samples and environments for long periods
- With no moving parts, produces less vibration and quieter operation over traditional magnetic stirrers

Intuitive Operation

- Multiple stirring modes are easy to program
- Bright digital display precisely controls time and speed
- Quickly meets stirring speeds with rapid acceleration and braking (less than 10 seconds)



Item No.	Color	L x W x H in	L x W x H cm
120584	Grey/Purple	9.7 x 7.7 x 3	24.5 x 19.5 x 7.5
120585	Grey/Blue	9.7 × 7.7 × 5	24.3 X 19.3 X 7.3

Replacement part	S
120738	MI Stirrer Silicone Mat
120739	MI Stirrer Universal Power Adapter



Protective silicone anti-skid plate cover for improved safety

resistant and easy to clean

Durable ABS housing is corrosion





Specifications	
Speed Range	50–2,000 rpm variable, 1 rpm increments
Run Time Range	30 seconds to 60 minutes, variable, 1 second increments or continuous
Stirrer Modes	Single clockwise
	Single counter clockwise
	Auto reverse rotation 1 to 99 cycles 50% duty
Capacity	3 L plus
Mixing Surface	165 mm diameter, silicone mat 160 mm diameter



Package Includes		
Rare Earth, NdFeB Magnetic Induction Stirre	r	
2 Stir Bars 35 mm x 12 mm Cylindrical Shape		
1 Silicone Anti-Skid Plate Cover		
1 Low Voltage, Double Insulated Power Adap Interchangeable Plugs		

Tel: (866) 433-6682

www.novatech-usa.com

Stir Bars & Stir Bar Retriever


- Magnetic bar is made from ALNICO, one of the strongest permanent magnets available
- The sintered manufacturing process reduces the chance of decoupling (spin outs), encapsulation in PTFE protects both magnet and what it is stirring
- Chemically inert and easy to clean
- Can withstand temperatures up to 250°C, making them suitable for use with both unheated and heated stirrers
- Available in two surfaces:
 - Low friction octagon shape with a center pivot ring helps create a strong mixing vortex, even with more viscous solutions
 - Smooth shape for better coupling when using concave bottom glassware
- The retrieval bar can recover stir bars even in hot solutions when stirring and mixing is no longer required

Stir Bars			Pack of 10	
Item No.	Shape	L x W (in)	L x W (<i>mm</i>)	
120547		0.4 x 0.2	10 x 5	
120548		0.8 x 0.3	20 x 8	
120549	Octagonal	1 x 0.3	25 x 8	
120550	with pivot ring	1.1 x 0.3	28 x 8	
120551		1.2 x 0.3	30 x 8	
120552		1.4 x 0.4	35 x 9	
120894		0.4 x 0.2	10 x 5	
120895	Smooth	1 x 0.3	25 x 8	
120896	3110011	1.2 x 0.3	30 x 8	
120897		1.4 x 0.3	35 x 8	
Stir Bar Retriever Pack of 5				
Item No.	L (in)		L (cm)	
120553	11.8		30	



Lab Mats

Two Lab Mat options to keep your workstation safe, quiet, clean and organized

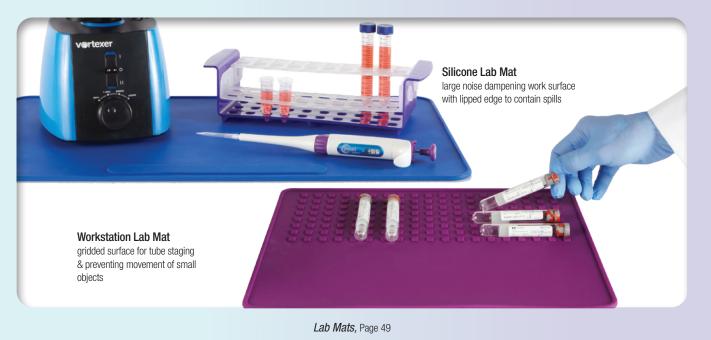

www.novatech-usa.com

Mini Magnetic Stirrer

Affordable solution, ultimate function

The Mini Magnetic Stirrer is an affordable, dependable solution ideal for general research, academic, life sciences, industrial and clinical lab settings

Durable Design

Ultimate Function

Mini Stirrer

- Constructed of chemical resistant ABS and PC blend
- Compact footprint saves valuable space on benchtop
- Lightweight for easy transport
- Powerful magnetic coupling ensures accurate alignment, reducing spin-outs during acceleration or deceleration
- Performs routine stirring applications with low vibration and quiet operation



Specifications

Speed Range 200–2,200 rpm (Infinitely adjustable)

Capacity Up to 3 L



			U.S.and E.U. Utility Patent Pending U.S. Design Patent No. D814,045	
Item No.	Color	L x W x H in	L x W x H cm	
120155	Grey/Purple 🔳 🗖	7.2 x 5.2 x 1.85	18.3 x 13.2 x 4.7	
120595	Grey/Blue	7.2 X 5.2 X 1.65	10.3 X 13.2 X 4.7	

Replacement Pa	rt
120815	Mini Stirrer Universal Power Adapter



Tel: (866) 433-6682

www.novatech-usa.com

Year arrant





Digital Vortexer

Controlled, high-speed touch mixing

The Digital Vortexer combines digital precision, ergonomic comfort, and durable construction, featuring variable speed control, low activation force, high-speed mixing, stability, chemical resistance, compliance certifications and a 5-year warranty

Digital Control: produces more accurate results

- Digital controls enhance user control for precise mixing
- Illuminated digital display ensures accuracy, reproducibility, and consistent results
- Variable speed control offers flexibility and precise control of mixing intensity
- Ergonomic: prevents user fatigue
- Minimal activation force, supporting both touch start and continuous operation for convenience
- High-speed vortex capability up to 3,600 RPM
- Multiple-position head allows vortexing at angles beyond 90 degrees for enhanced versatility
- Durable Design: guarantees quality that saves money
- Constructed from ABS and silicone, unit resists common chemicals and facilitates easy cleaning
- Stable platform and elastomer feet ensure unit stays stable during operation
- Meets Safety and Compliance Certifications while offering lower energy consumption
- 5-Year warranty





Item No.	Color	L x W x H in	L x W x H cm
120805	Grey/Purple 🔳 🔳		
120806	Grey/Blue		

Specifications	
Speed Range	500 – 6,000 rpm
Operating Modes	Intermittent (Touch) and Continuous
Intermittent Speed Range	600 to 3,600 RPM
Continuous Speed Rang	600 to 2,600 RPM
Run Time Range	0 to 50 hrs
Timer Range:	Down-counting, in minutes and seconds, (Continuous Mode run time is up to 50 hours, Intermittent Mode run time is up to 1 minute), Upward-counting run time is up to 50 hrs
Weight	5.4 lbs (2.4 kg)
Electrical Input	100-240 VAC, 2.5A, 50/60 Hz Output: 12 VDC, 3.0A, 36.0W
Maximum Load (Continuous)	250 grams (0.55 lbs)



Vortexer

Multi-purpose, maximum convenience

Innovative Design

- One mixing head does it all with this sleek, modern and compact designed vortex mixer
- Hold slot configurations for multiple sizes of tubes, vessels and assay plates
- Center pad for quick hand-held mixing

Easy to Use

- Control switch with three operation selections (intermittent, off, continuous)
- Variable Speed Rotary Dial provides pre-set speed control selection during shaking mode

Durable Construction

- ABS material resist most commonly used chemicals and is easy to clean
- Stable elastomer feet dampen vibration and prevent movement during operation

Center pad area for



hand held mixing

5 mL tubes x 2 (horizontally mounted in the same retention space as 15 mL)



Assay plate x 1 (to be used with retention cords)



0.5 mL microfuge tubes x 6 (vertically mounted)



Models 120209, 120212, 120214

rds) 25 mL, 50 mL conical tubes x 2 (horizontally mounted)

1.5/2.0 mL microfuge tubes x 4

(vertically mounted)





0.2 mL microfuge tubes (strip tubes) x 24 (vertically mounted)

US Design Patent No. D787,085 US Utility Patent No. 9895670



Replacement parts		Replace	Replacement parts	
120327	Vortexer Multi-Head	120333	220-240 VAC AUS Cord	\odot
120328	Vortexer Central Pad, 3 pk	120332	220-240 VAC CE Cord	$\langle \cdot \cdot \rangle$
120422	Vortexer Retention Cords, 3 pk	120331	220-240 VAC UK Cord	<u>_</u>
120329	100-120 VAC US Cord	120330	100-110 VAC Japan Cord	11
120329	100-120 VAC US Cord	120330	100-110 VAC Japan Cord	I

Specifications	
Speed Range	Up to 3,000 rpm
Orbit	3.7 mm
Control	3 Position Control — (top) intermittent, (middle) off, (bottom) continuous



www.novatech-usa.com



Mini Vortexer

Small footprint with maximum power

Simple, touch start operation offers exceptional mixing performance with one hand


Robust Design

- Low profile design and small footprint saves valuable space
- Made of ABS and silicone materials that resist most commonly used chemicals
- Stable platform and elastomer feet ensure unit stays stable during operation

Powerful Function

- Rapid vortex action with low activation force
- Quiet operation and low vibration





Item No.	Color	L x W x H in	L x W x H cm
120567	Grey/Purple		
120598	Grey/Blue	5.1 x 4.3 x 3	13 x 11 x 7.5
120827	Black/Black		

Replacement parts					
120617 Mini Vortexer Silicone Cover, set of 2					
120814	Mini Vortexer Universal Power Adapter				

Speed	4,500 rpm
Orbit	6 mm
Capacity	Up to 50 mL tube

Package Includes

Mini Vortexer

2 Silicone Caps

1 Low Voltage, Double Insulated Power Adapter (100-240 VAC, 50/60 Hz) with 4 Interchangeable Plugs

Tel: (866) 433-6682



Digital Orbital Shaker

Shaker for a vast range of protocols

Versatile Design

- Create your own matrix for vessels of all shapes and sizes with Hi-Lo Platform and Bungee Cords
- Instantly adjusts to weight load changes and unbalanced loads with nostop electronic motor feedback allowing for truly reproducible results
- Durable ABS construction suitable for use in incubators (excluding C02) and cold rooms within the stated temperature range

High-Featured Operation

- _ Suitable for wide range of protocols including very low start speed for sensitive sample agitation to high speeds for vigorous applications
- Soft start and shut down feature reduces spilling from full vessels -
- Designed to handle heavy loads up to 10 lbs (4.5 kg)
- Overload protection shut-off prevents overloading

Item No.	L x W x H in	L x W x H cm	Platform Int	erior W x D cm
120460	12.4 x 7.8 x 12.2	31.4 x 19.7 x 31	11 x 11	27.9 x 27.9

Replacement parts					
120521	Digital Orbital Shaker Silicone Mat & Bumpers				
120524	Digital Orbital Shaker Bungee Cords, Pack of 8				
120491	Digital Orbital Shaker Universal Power Adapter				



Specifications	
Speed Range	20-300 rpm, 10 rpm increments
Orbit Diameter	19 mm (0.8")
Run Time Range	0 to 74 hours and 59 minutes; 1 minute increments or continuous
Maximum Load	4.5 kg (10 lbs)



Package Includes	
Digital Orbital Shaker	
Skid-Free Rubber Platform Mat	
8 Bungee Cord Set	
Universal Hi-Lo Platform with Soft Rubber Edge Bumpers	

11

1 Low Voltage, Double Insulated Power Adapter (100-240 VAC, 50/60 Hz) with 4

Tel: (866) 433-6682

Interchangeable Plugs

Sampling & Testing Instruments

Reliable and accurate instrument range for diverse applications



Thermometers Refractometers Hydrometers & Jars Pipette Controllers Colony Counters & Accessories

Tel: (866) 433-6682

www.novatech-usa.com

THERMOMETERS

We have a wide range of thermometers to measure and track temperatures for a wide range of applications. Our portfolio includes Dial (Bimetal), Digital and Glass Thermometer options to get the job done.

Dial Thermometers

Dial thermometers don't require batteries, are enduring, and readings can be adjusted with the calibration screw on the back

Indicates temperature through a metal stem with attached circular scale. Application use varies with dial sizes, stem lengths and temperature ranges.



Dial Thermometers - 1" Diameter

Ideal for many applications including food and beverage quality control, general lab use, and asphalt/concrete testing

- The small stem and face fits nicely into a shirt pocket or holder

- Includes a plastic sheath with pocket clip for storage

Dial Thermometers - 1" Diameter

Item No.	Temperature Range	Subdivisions	Accuracy	Face Diameter (in/mm)	Stem Length (in/mm)	Stem Diameter (in/mm)
81125	25 to 125°F	1°F	±1°F			
81070	-40 to 70°C	1°C	±1°C	1 / 05	F / 107	01/05
81110	-10 to 110°C	1°C	±1°C	— 1 / 25	5 / 127	0.1 / 3.5
81550	50 to 550°F	5°F	±5°F			

Dial Thermometers - 1.75" / 2" Diameter

Ideal for many applications including food and beverage quality control, general lab use, and asphalt/concrete testing

- Larger dial size than common pocket thermometers for easier reading

- Features an adjustment screw for field calibration
- Includes a clip for container mounting

Dial Thermometers - 1.75" / 2" Diameter



Item No.	Temperature Range	Subdivisions	Accuracy	Face Diameter (in/mm)	Stem Length (in/mm)	Stem Diameter (in/mm)
82125	25 to 125°F	1°F	±1°F	1.8 / 44.5	8 / 203	0.1 / 3.5
82110	-10 to 110°C	1°C	±1°C	1.8 / 44.5	8 / 203	0.1 / 3.5
82220	0 to 220°F	2°F	±2°F	1.8 / 44.5	8 / 203	0.1 / 3.5
82550	50 to 550°F	5°F	±5°F	1.8 / 44.5	8 / 203	0.1 / 3.5
82550DG	50 to 550°F /	2.5°F ±2.5°F	0 / 000	01/05		
	10 to 290°C	5°C	±5°C	2 / 51	8 / 203	0.1 / 3.5

Dial Thermometers - 3" Dial

Ideal for many applications including soil testing, food and beverage quality control, and asphalt/concrete testing

- Constructed of stainless-steel case, bezel, and stem with a glass window
- Case is hermetically sealed to prevent lens fogging
- Includes a 1/2"NPT male thread on the back for threading into a pipeline
- Also features an adjustment screw for field calibration

Dial Thermometers - 3" Diameter

Item No.	Temperature Range	Subdivisions	Accuracy	Face Diameter (in/mm)	Stem Length (in/mm)	Stem Diameter (in/mm)
82160-6	-40 to 160°F	2°F	±2°F	3 / 76	6 / 152	0.3 / 6.4
82160-12	-40 to 160°F	2°F	±2°F	3 / 76	12 / 305	0.3 / 6.4

Long-Stem Dial Thermometers

Ideal for many applications including compost testing, food and beverage quality control, and asphalt/concrete testing

- Constructed of stainless-steel case, bezel, and stem with a glass window
- Case is hermetically sealed to prevent lens fogging
- Includes a 1/2"NPT male thread on the back for threading into a pipeline
- Also features an adjustment screw for field calibration

Long-Stem Dial Thermometers

Item No.	Temperature Range	Subdivisions	Accuracy	Face Diameter (in/mm)	Stem Length (in/mm)	Stem Diameter (in/mm)
82200-36	0 to 200°F	2°F	±2°F	3 / 76	36 / 914	0.3 / 7.9
82100-36	0 to 100°C	1°C	±1°C	3 / 76	36 / 914	0.3 / 7.9
82200-48	0 to 200°F	2°F	±2°F	3 / 76	48 / 1220	0.3 / 7.9

Swivel-Head Digital Thermometers

Digital stem thermometers are ideal for temperature monitoring in essentially any setting and application

-	Laboratories - easily monitoring	-	Food Processing
	reagents and liquids in test	-	Refrigeration
	tubes, beakers, and flasks	-	Horticulture

Both models feature a dual scale (°F / °C), fast 1-second update time, and a swivel head that can be moved a full 180° for easy reading in any position. Both the ON/OFF and scale selection buttons are located on the face for easy access.

The thermistor sensor stem is stainless steel, 0.138" (3.5 mm) diameter, and includes a protective case featuring a pocket clip. Includes a 1.5V alkaline battery (LR44) and features automatic power-off after 10 minutes of non-use.



Swivel-Head Digital Thermometers

	•				
Item No.	Temperature Range	Resolution	Accuracy	Stem Length (in/mm)	Stem Diameter (in/mm)
83210-12	-58 to 302°F / -50 to 150°C	0.1°	±2.0°F / 1.0°C	12 / 305	0.1 / 3.5
83110	14 to 212°F / -10 to 100°C	0.1°	±1.0°F/0.5°C	5 / 127	0.1 / 3.5



82200-36

100 120

VEEGEE 140

160

80

82160-6

Tel: (866) 433-6682

www.novatech-usa.com

Glass Thermometers

VEE GEE thermometers feature a SafetyBLUE fill. This is an organic performance liquid that is bio-degradable and exhibits all the qualities of mercury without the risk of contamination and hazards associated with mercury.

Serialized Glass Thermometers

Precision serialized thermometers are ideal for use in laboratories, universities, food/beverage, environmental, wastewater and many other general-purpose applications

- Feature SafetyBLUE fill against a white background for easy reading
- Accuracy is equal to one subdivision

Serialized Glass Thermometers

Item No.	Temperature Range	Subdivisions	Length (in/mm)	Immersion
80701	-30 to 120°F	2°F	12 / 300	Total
80702	-4 to 230°F	2°F	12 / 300	Total
80703	0 to 300°F	2°F	12 / 300	Total
80706	-35 to 50°C	1°C	12 / 300	Total
80707	-20 to 110°C	1°C	12 / 300	Total
80708	-20 to 150°C	1°C	12 / 300	Total
80901	-30 to 120°F	2°F	12 / 300	Partial
80902	-4 to 230°F	2°F	12 / 300	Partial
80903	0 to 300°F	2°F	12 / 300	Partial
80905	20 to 500°F	2°F	15.4 / 391	Partial
80906	-35 to 50°C	1°C	12 / 300	Partial
80907	-20 to 110°C	1°C	12 / 300	Partial
80908	-20 to 150°C	1°C	12 / 300	Partial
80910	-10 to 250°F	2°F	15.4 / 391	Partial

Serialized Encapsulated Glass Thermometers

Encapsulation protects you from broken glass and liquid

- Feature FEP encapsulation; in the event of breakage the FEP coating contains the broken glass and liquid, preventing injury or contamination
- Feature SafetyBLUE fill against a white background for easy reading
- Accuracy is equal to one subdivision

Serialized Encapsulated Glass

Item No.	Temperature Range	Subdivisions	Length (in/mm)	Immersion
80701E	-30 to 120°F	2°F	12 / 300	Total
80702E	-4 to 230°F	2°F	12 / 300	Total
80703E	0 to 300°F	2°F	12 / 300	Total
80704E	30 to 220°F	2°F	15.4 / 391	Total
80706E	-35 to 50°C	1°C	12 / 300	Total
80707E	-20 to 110°C	1°C	12 / 300	Total
80708E	-20 to 150°C	1°C	12 / 300	Total
80901E	-30 to 120°F	2°F	12 / 300	Partial
80902E	-4 to 230°F	2°F	12 / 300	Partial
80903E	0 to 300°F	2°F	12 / 300	Partial
80904E	30 to 220°F	2°F	15.4 / 391	Partial
80906E	-35 to 50°C	1°C	12 / 300	Partial
80907E	-20 to 110°C	1°C	12 / 300	Partial
80908E	-20 to 150°C	1°C	12 / 300	Partial

80702E

Serialized Armored Glass Thermometers

Armor protects the thermometer from rough handling and shock during use

- Includes nickel-plated brass armor
- Feature SafetyBLUE fill against a white background for easy reading
- Accuracy is equal to one subdivision

Serialized Armored Glass Thermometers

Item No.	Temperature Range	Subdivisions	Length (in/mm)	Immersion
80701-A	-30 to 120°F	2°F	12 / 300	Total
80702-A	-4 to 230°F	2°F	12 / 300	Total
80703-A	0 to 300°F	2°F	12 / 300	Total
80706-A	-35 to 50°C	1°C	12 / 300	Total
80707-A	-20 to 110°C	1°C	12 / 300	Total
80708-A	-20 to 150°C	1°C	12 / 300	Total
80901-A	-30 to 120°F	2°F	12 / 300	Partial
80902-A	-4 to 230°F	2°F	12 / 300	Partial
80903-A	0 to 300°F	2°F	12 / 300	Partial
80905-A	20 to 500°F	2°F	15.4 / 391	Partial
80906-A	-35 to 50°C	1°C	12 / 300	Partial
80907-A	-20 to 110°C	1°C	12 / 300	Partial
80908-A	-20 to 150°C	1°C	12 / 300	Partial
80910-A	-10 to 250°F	2°F	15.4 / 391	Partial

Armored Encapsulated Glass Thermometers

Armor protects the thermometer and encapsulation protects you

- Includes FEP encapsulation and nickel-plated brass armor
- In the event of breakage, the FEP coating contains the broken glass and liquid fill, preventing injury or contamination. The armor protects the thermometer from rough handling and shock during use
- Feature SafetyBLUE fill against a white background for easy reading

- Accuracy is equal to one subdivision

Armored Encapsulated Glass Thermometers

Item No.	Temperature Range	Subdivisions	Length (in/mm)	Immersion
80701E-A	-30 to 120°F	2°F	12 / 300	Total
80702E-A	-4 to 230°F	2°F	12 / 300	Total
80703E-A	0 to 300°F	2°F	12 / 300	Total
80704E-A	30 to 220°F	2°F	15.4 / 391	Total
80706E-A	-35 to 50°C	1°C	12 / 300	Total
80707E-A	-20 to 110°C	1°C	12 / 300	Total
80708E-A	-20 to 150°C	1°C	12 / 300	Total
80901E-A	-30 to 120°F	2°F	12 / 300	Partial
80902E-A	-4 to 230°F	2°F	12 / 300	Partial
80903E-A	0 to 300°F	2°F	12 / 300	Partial
80904E-A	30 to 220°F	2°F	15.4 / 391	Partial
80906E-A	-35 to 50°C	1°C	12 / 300	Partial
80907E-A	-20 to 110°C	1°C	12 / 300	Partial
80908E-A	-20 to 150°C	1°C	12 / 300	Partial

Armor Cases for Glass Thermometers

Nickel-plated brass armor cases protect liquid-in-glass thermometers from rough handling and shock during use

Armors feature a threaded screw cap with ring top for suspension where necessary

Item No.	Thermometer Length (in/mm)	Outside Diameter (in/mm)	Inside Diameter (in/mm)
83025A	12 / 305	0.4 / 9.5	0.3 / 7.5
83025N	15.5 / 393	0.4 / 9.5	0.3 / 7.5

Tel: (866) 433-6682

www.novatech-usa.com

Ĭ

80701-A

Glass Thermometers: Be in the know....

Column Separation

The largest single cause for failure of liquid-in-glass thermometers in the lab is due to column separation. This can occur in transit or in the lab.

The simplest and safest method to reunite a separated column is to force the liquid down the capillary tube by using a centrifuge, if one is available with a cup deep enough to ensure that the centrifugal force is below the liquid column.

- Carefully insert the thermometer, bulb down, into the centrifuge. Place some cotton wadding at the bottom of the cup to prevent any damage to the bulb. Turn on the centrifuge - in just a few seconds all the liquid will be forced past the separation.
- If the cup is not deep enough and all the centrifugal force is not below the column, the column will split, forcing part of the liquid down. The remainder will be forced up, filling the expansion chamber.
- If a centrifuge is not available, the column can be reunited by holding the thermometer in an upright position and gingerly tapping the stem above the separation against the palm of your hand. As you gently tap the thermometer, observe the liquid above the separation until it breaks away from the wall of the capillary and runs down to join the main column.

Immersion Types

Thermometers are one of the most important instruments used in the laboratory and are a relatively inexpensive means of reliably measuring temperature, provided they are properly used and not abused.

It is essential that the instruments be used in the manner prescribed if true temperature are to be ascertained. The following are some terms that should be understood and adhered to when true temperatures are to be obtained:

Total immersion - such a thermometer is designed to indicate temperatures correctly when the bulb and the entire liquid column are exposed to the temperature being measured, except for a minimal length emergent to be visible. Therefore, the thermometer is immersed into the medium up to the point of reading.

Partial Immersion - such a thermometer has a line around it at the immersion distance from the bottom. The thermometer indicates correctly when the bulb and liquid column to that line are exposed to the temperature being measured and the emergent stem is at ambient temperature. Therefore, the thermometer is immersed only up to the immersion line.

REFRACTOMETERS

VEE GEE's benchtop and handheld refractometers provide users with highly accurate readings for a wide range of applications in the agricultural, food & beverage, chemical and manufacturing industries.

We offer a large breadth of scales for specific applications such as Brix, NaCl, Salinity, Specific Gravity of Seawater, Coolant, Battery Acid, and more. Our portable line of optical and digital refractometers offers the convenience to perform sample analysis where and when you need. With added temperature control, our Abbe benchtop unit takes the accuracy of your Brix/Refractive Index analysis to the next level in the laboratory.

X-Series Handheld Refractometers

Compact & Portable

The X-Series handheld refractometers are exceptionally simple to operate and provide quick, accurate measurements for the concentration of nearly any aqueous solution in a wide range of applications.


Made durable with industrial-grade design features to provide years of reliable use even in the field. Rugged metal housing construction with slip-resistant rubber grip and a Non-Roll stand to protect from rolling off surfaces.

No need to recalibrate or apply correction factors in work environments with large temperature swings with the Automatic Temperature Compensation (ATC) feature included on Models BTX-1, BTX-20, STX-3, CTX-1 & CTX-2. The effective compensation range is 50-86° F / 10-30° C.

rotective	Grin	
TOLEGUIVE	unp	

The rubber grip reduces hand slipping and guards against user's hand heat to maintain accuracy

Tool-Free Calibration Tools not required with our patented "Zero-Ring" calibration (non ATC units only)



Accurate & Sharp Readings Large scale is best in class delivering clear, sharp figures, screen shading and incredible contrast for overall accuracy

Quick Results

High quality optical glass prism and all-metal housing design allows the sample and prism to reach temperature equilibrium quickly


X-Series Specifications					
Sample Type Transparent and Translucent					
Sample Quantity	>0.1 mL				
Prism	Optical Glass				
Prism Housing	Copper Alloy w/Nickel-Chrome Coating				
Included	Carrying Case, Plastic Transfer Pipet, Instruction Manual * ATC models include calibration screwdriver.				
Warranty	5-Year				

X-Series Handheld Refractometers

For Food, Beverage, and Agriculture Applications

Brix Handheld Refractometers

Item No.	Model No.	Scale	Range	Resolution	Accuracy	ATC	Approx Length (in/mm)
43001	BX-1	Brix	0 to 32%	0.2%	±0.2% Brix	No	6.5 / 165
43002	BTX-1	Brix	0 to 32%	0.2%	±0.2% Brix	Yes	6.5 / 165
43003	BX-2	Brix	28 to 62%	0.2%	±0.2% Brix	No	5.9 / 150
43004	SGX-1	Brix/Specific Gravity Beer Wort	0 to 32% 1.000 to 1.130	0.2% / 0.001	±0.2% / ±0.001	Yes	6.5 / 165
43005	BX-3	Brix	60 to 92%	0.2%	±0.2% Brix	No	5.5 / 140
43006	HMX-1	Brix, Honey	Brix, 58.0 to 92% Water, 13 to 27%	0.5% 1.0%	±0.5% Brix ±1.0% Water	Yes	5.8 / 148
		Moisture	Baume, 38 to 43°	0.5°	±0.5° Baume		
43007	BX-4	Brix	45 to 82%	0.2%	±0.2% Brix	No	5.5 / 140
43009	BX-10	Brix	0 to 10%	0.1%	±0.1% Brix	No	7.3 / 185
43011	BX-20	Brix	0 to 20%	0.1%	±0.1% Brix	No	7.3 / 185
43012	BTX-20	Brix	0 to 20%	0.1%	±0.1% Brix	Yes	7.3 / 185
43015	BX-50	Brix	0 to 50%	0.5%	±0.5% Brix	No	5.7 / 145



43012/Model BTX-20 For specific scale images, visit product on our website.



New! Brix Field Kits

Everything you need for in field testing at the Vineyard or Honey Bee Farm

Includes durable Carrying Case with Refractometer, Microfiber Cloth, Bottle for Distilled Water, Sample Cup, Sample Pipette, Calibration Screwdriver and Manual

Item No.	Model No.	Scale	Range	Resolution	Accuracy	ATC	Approx. Length (in/mm)	L x W x H of Kit (in/cm)
43002-KIT	BTX-1	Brix	0 to 32%	0.2%	±0.2% Brix	Yes	6.5 / 165	10.5 x 7 x 3 in.
43006-KIT	HXM-1	Brix,	Brix, 58.0 to 92%	0.5%	±0.5% Brix	Yes	5.8 / 148	26.7 x 17.8 x 7.6 cm
		Honey Moisture	Water, 13 to 27%	1.0%	±1.0% Water			
			Baume, 38 to 43°	0.5°	±0.5° Baume	_		

Water Testing Refractometers

For Water/Wastewater, Aquatic and Aquaculture Applications

Sodium Chloride And Salinity Handheld Refractometers

Item No.	Model No.	Scale	Range	Resolution	Accuracy	ATC	Approx.Length (in/mm)
43033	SX-1	NaCl	0 to 10%	0.1%	±0.1%	No	7.3 / 185
43035	SX-2	NaCl	0 to 28%	0.2%	±0.2%	No	6.5 / 165
43036	STX-3	Salinity	0 to 100 ppt	1.0 ppt	±1.0 ppt	Yes	7.3 / 185
		Specific Gravity of Seawater	1.000 to 1.070	0.001	±0.001		

New! Water Testing Field Kit

Tel: (866) 433-6682

Testing when and where you need to with this convenient kit

Includes durable Carrying Case with Refractometer, Microfiber Cloth, Bottle for Distilled Water, Sample Cup, Sample Pipette, Calibration Screwdriver and Manual

item No.	Model No.	Scale	Range	Resolution	Accuracy	ATC	Approx. Length (in/mm)	L x W x H of Kit (in/cm)
43036-KIT	STX-3	Salinity	0 to 100 ppt	1.0 ppt	±1.0 ppt	Yes	7.3 / 185	10.5 x 7 x 3 in.
		Specific Gravity of Seawater	1.000 to 1.070	0.001	±0.001			26.7 x 17.8 x 7.6 cm

www.novatech-usa.com





43035/Model SX-2 For specific scale images, visit product on our website.



X-Series Handheld Refractometers

For Light Industrial, Chemical, and Automotive Applications

General Purpose and Industrial Chemical Handheld Refractometers

Item No.	Model No.	Scale	Range	Resolution	Accuracy	ATC	Approx. Length (in/mm)
43055	NDX-2	Refractive Index	1.435 to 1.520	0.001	±0.001	No	5.5 / 140
43062	CTX-1	Propylene Glycol Freezing Point	-58 to 32°F / -50 to 0°C	33.80°F 1°C	±1°C	Yes	5.9 / 150
		Ethylene Glycol Freezing Point	-50 to 0°C	1°C	±1°C		
		Battery Acid Specific Gravity	1.10 to 1.40	0.01	±0.01		
43064	CTX-2	Propylene Glycol Freezing Point	-50 to 32°F / -45.56 to 0°C -60 to 32°F / -51.11 to 0°C	2°F -16.67°C	±2°F	Yes	5.9 / 150
		Ethylene Glycol Freezing Point	-60 to 32°F	2°F	±2°F		
		Battery Acid Specific Gravity	1.10 to 1.40	0.01	±0.01		
43071	URX-60	Urea	0 to 60%	0.5%	±0.5%	No	5.7 / 145

1.10 The state of the state of

30 45

27%

10 200

1.35 es -30

.15

25 35 -20

245 -10

For specific scale images, visit product on our website.

Accessories

Item No.	Description	Model
43000-DLXXX	Daylight Plate Kit	X-Series Handheld Refractometers Kit includes: Ring, Hinge, Plate, and Screw. Assembled
43RP-008	Soft Fabric Carrying Case	X-Series Handheld Refractometers
1111	Soft Vinyl Carrying Case	BX-1, BTX-1, BX-2, BX-3, BX-4, BX-50, SX-2, NDX-2, CTX-1, CTX-2, HMX-1, SGX-1, URX-60
1111L	Soft Vinyl Carrying Case	BX-10, BX-20, BTX-20, SX-1, STX-3



43000-DLXXX Daylight Plate Kit

Transfer Pipets

One-piece, unbreakable polyethylene plastic pipettes Transfer and deliver small volumes of liquid quickly and safely

- Bulk packed versions come in handy dispenser box
- Sterile versions available single wrapped or 20 wrapped at a time
- Lot-to-lot traceability on sterile versions

Transfer Pipets

	Item No.	Vol. (mL)	Working Vol. (mL)	Approx. Length (in/mm)	Graduations (mL)	Packaging 500 per box	Sterile
	20327-1	5	1	5.9 / 150	0.25	Bulk	
a	20327-1SB	5	1	5.9 / 150	0.25	20/bag	\checkmark
	20327-1S	5	1	5.9 / 150	0.25	1/single wrap	\checkmark
	20327-2	5	2	6.1 / 155	0.5	Bulk	
b	20327-2SB	5	2	6.1 / 155	0.5	20/bag	\checkmark
	20327-2S	5	2	6.1 / 155	0.5	1/single wrap	\checkmark
_	20327-3	7	3	6.1 / 155	0.5	Bulk	
C	20327-3SB	7	3	6.1 / 155	0.5	20/bag	✓
	20327-3S	7	3	6.1 / 155	0.5	1/single wrap	\checkmark



STERILE R

MDX-Series Digital Refractometers

Compact, Durable and Accurate

The MDX-Series Digital Refractometers feature IP65/67 ratings, making them ideal for use in the field and in a multitude of environments.

Delivering quick digital accuracy with high-end performance features like:

- Automatic Temperature Compensation (ATC)
- Continuous Loop Average Readings



Intuitive to Use

Easy operation with large readable digital LCD display that shows all data needed on screen

Easy to Clean Prism cover and rubber grip add extra protection and are

removable for easy cleaning

Mdx-Series Specifications	
ATC Range	32 to 104°F / 0 to 40°C
IP Rating	IP67: detecting unit IP65: body
Prism	Optical Glass
Wavelength	589.3 nm LED
Sample Cell	Stainless Steel
Calibration Solution	Distilled Water (not included)
Min. Sample Volume	0.3 mL
Battery	1 X AAA, 1.5V
Dimensions (L x W x H in/mm)	4.8 x 2.3 x 1.3 / 121.92 x 58.42 x 33.02
Weight (lb/kg)	0.198 lb / 0.089 kg
Protective Case Dimensions (L x W x H in/mm)	6.75 x 4.25 x 2 / 171.45 x 107.95 x 50.8
Included	Hard shell case with protective lining, disposable pipette, (1) AAA Battery, and user manual
Warranty	1-Year Parts and Labor

www.novatech-usa.com



sales@novatech-usa.com

Quick Results

Simply place 4-5 drops of your sample into the well, close the prism cover, and press the "READ" button

MDX-Series Digital Refractometers

For Food, Beverage, and Agriculture Applications

Digital Brix/Sugar Refractometer

Item No.	Model No.	Scale	Range	Resolution	Accuracy	
48101	MDX-101	Brix	0.0 to 50.0% Brix	0.1% Brix	±0.2% Brix	
		Refractive Index	1.3330 to 1.4200 nD	0.0001 nD	±0.0003 nD	
48102	MDX-102	Brix	0.0 to 90.0% Brix	0.1% Brix	±0.2% Brix	
		Refractive Index	1.3330 to 1.5300 nD	0.0001 nD	±0.0003 nD	
48103	MDX-103	Dextran	0.0 to 10.5%	0.1%	±0.2%	
		Fructose	0.0 to 68.0%	0.1%	±0.2%	
		Glucose	0.0 to 59.0%	0.1%	±0.2%	
		Lactose	0.0 to 16.5%	0.1%	±0.2%	
		Maltose	0.0 to 15.5%	0.1%	±0.2%	
		Sucrose (Brix)	0.0 to 90.0%	0.1%	±0.2%	

Digital Honey Refractometer

Item No.	Model No.	Scale	Range	Resolution	Accuracy	
48301	MDX-301	Brix	0.0 to 90.0% Brix	0.1% Brix	±0.2% Brix	
		Moisture	5.0 to 38.0%	0.1%	±0.2%	
		Baume	33.0 to 48.0°	0.1°	±0.2°	
		Refractive Index	1.3330 to 1.5300 nD	0.0001 nD	±0.0003 nD	

Digital Wine Refractometer

Model No.	Scale	Range	Resolution	Accuracy	
MDX-401	Brix	0.0 to 50.0% Brix	0.1% Brix	±0.2% Brix	
	PA (% v/v)	0.0 to 22.0%	0.1%	±0.2%	
	Oechsle (Oe)	0 to 150°	1°	±2°	
	KMW (Babo)	0.0 to 25.0°	0.1°	±0.2°	
	Model No.	Model No.ScaleMDX-401BrixPA (% v/v)Oechsle (Oe)	MDX-401 Brix 0.0 to 50.0% Brix PA (% v/v) 0.0 to 22.0% Oechsle (Oe) 0 to 150°	Model No. Scale Range Resolution MDX-401 Brix 0.0 to 50.0% Brix 0.1% Brix PA (% v/v) 0.0 to 22.0% 0.1% Oechsle (Oe) 0 to 150° 1°	Model No. Scale Range Resolution Accuracy MDX-401 Brix 0.0 to 50.0% Brix 0.1% Brix ±0.2% Brix PA (% v/v) 0.0 to 22.0% 0.1% ±0.2% Oechsle (Oe) 0 to 150° 1° ±2°

For Water/Wastewater, Aquatic and Aquaculture Applications

Digital Sodium Chloride Refractometer

J						
Item No.	Model No.	Scale	Range	Resolution	Accuracy	
48201	MDX-201	NaCl (%)	0.0 to 28.0%	0.1%	±0.2%	
		NaCI (ppt)	0 to 280 ppt	1 ppt	±2 ppt	
		Specific Gravity	1.000 to 1.217	0.001	±0.002	
		Refractive Index	1.3330 to 1.4200 nD	0.0001 nD	±0.0003 nD	

Digital Seawater Refractometer

Item No.	Model No.	Scale	Range	Resolution	Accuracy	
48202	MDX-202	Salinity	0 to 100 ppt	1 ppt	±2 ppt	
		Chlorinity	0 to 57 ppt	1 ppt	±2 ppt	
		Specific Gravity	1.000 to 1.075	0.001	±0.002	
		Refractive Index	1.3330 to 1.4200 nD	0.0001 nD	±0.0003 nD	

For Light Industrial, Chemical, and Automotive Applications

Digital DEF (UREA)/Battery Acid Refractometer

Item No.	Model No.	Scale	Range	Resolution	Accuracy
48602	MDX-602	DEF (Urea)	0.0 to 51.0%	0.1%	±0.2%
		Refractive Index	1.3330 to 1.4200 nD	0.0001 nD	±0.0003 nD
		Battery Acid Specific Gravity	1.000 to 1.500	0.001	±0.005

Digital Coolant Refractometer

Item No.	Model No.	Scale	Range	Resolution	Accuracy
48603	MDX-603	Ethylene Glycol (% v/v)	0.0 to 65.0%	0.1%	±0.5%
		Ethylene Glycol Freezing Point	-80.0 to 32.0°F / -50.0 to 0.0°C	0.1°F / 0.1°C	±1.0°F/±0.5°C
		Propylene Glycol (% v/v)	0.0 to 73.0%	0.1%	±0.5%
		Propylene Glycol Freezing Point	-100.0 to 32.0°F / -50.0 to 0.0°C	0.1°F / 0.1°C	±1.0°F/±0.5°C

C10 Abbe Refractometer

High Precision Benchtop Unit

The C10 Abbe Refractometer is a high precision benchtop instrument measuring the Refractive Index (nD) of liquids, glass, plastic and film.

With an oversized, easy to read scale and Prism Temperature Control feature, the C10 delivers Brix and Refractive Index Scales and dispersion measurements with high precision.

Made of easy to clean, durable metal housing, the C10 is a long-lasting tool perfect for Education, Food, Beverage and Industrial Laboratories.

C10 Abbe Refractometer Specifications					
Dispersion (nF-nC)	Dial Readings w/Conversion Charts				
Ambient Temperature	41 to 95°F / 5 to 35°C				
•	32 to 158°F / 0 to 70°C				
Measuring Temperature	0 to 70°C				
Optical Wavelength	589 nm				
Prism	Optical Glass				
Prism Housing	SUS316 Stainless Steel 2 for Primary Prism,				
Circulator Nozzles					
	2 for Secondary Prism;				
	accepts 3/8" ID tubing				
Dimensions (L x W x H in/mm)	6.5 x 3.5 x 9.4 / 165.1 x 88.9 x 238.76				
Weight	9.9 lb / 4.5 kg				
Supplied With	2 x LR44, 1.5V Batteries				
	Glass Standard (1.5163 nD)				
	Bromonaphthalene Contact Liquid				
	(4 mL bottle)				
	Scale Adjustment Tool				
Warranty	1-Year Parts and Labor				



C10 Abbe Refractometer

Item No.	Scale	Range	Resolution	Accuracy
C10	Brix	0.0 to 95.0%	0.25% Brix	±0.15% Brix
	Refractive Index	1.3000 to 1.7200 nD	0.0005 nD	±0.00025 nD

Refractometer Standards, Letter of NIST Traceability Certification

Item No. Type		Brix Value (68°F / 20°C)	R.I. Value (68°F / 20°C)) Bottle Volume		
45000-0S025	Oil	60.00%	1.4420 nD	7.4 mL / 0.25 oz		
45000-0S200	Water	0.00%	1.33297 nD	7.4 mL / 0.25 oz		
45000-0S001	Contact Solution	0.00%	1.65 nD	7.4 mL / 0.25 oz		

Manual Polarimeter

Rugged design and simple operation allows for heavy use at the instructional level

- Polarimeters are used to measure the purity of ingredients in pharmaceuticals, quality control of raw materials, and concentration of ingredients in sugar-based substances
- The model C25L Polarimeter is designed to measure the angle of rotation caused by passing polarized light through an
 optically active substance
- Power Output: 110/220 VAC, 50/60 Hz. Comes with 110 VAC US power cord

Manual Polarimeter

wanuar	Polarimete	ſ						
Item No.	Measuring Range	Resolution	Accuracy	Light Source	L x W x H (in)	L x W x H (mm)	Weight	Power
4601P	±180°	0.1°	±0.1°	LED with 589 nm filter	18.1 x 5.5 x 13	460 x 140 x 330	11.5 lbs / 5.2 l	kg 110/220 VAC
Replace	ment parts	i			0			
Item No.	De	escription			0 40	00P-SC200, 200 m	am 10 ml	20
4600P-S	C100 10	0 mm sample	e cell		40	100P-5C200, 200 II		
4600P-S	C200 20	0 mm sample	e cell					-
1200-FS4	4 Fu	se, 1A, 250V				4600P-SC100, 10	00 mm. 11 mL	

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

HYDROMETERS

VEE GEE Hydrometers are manufactured to exacting standards. Each instrument is individually tested and inspected to ensure the highest level of dependability, accuracy, and uniformity. Scales include: API, Alcohol, Battery, Baume, Brix, Calcium Chloride, Liquid Petroleum Gas, Plato, Specific Gravity, Sodium Chloride & Soil Analysis.

Hydrometers Explained ...

The hydrometer is an instrument which is constructed on the Archimedes principle that a solid body displaces its own weight of the liquid in which it floats. Hydrometers can be divided into two general classes; namely for liquid heavier than water and for liquids lighter than water. The base hydrometer scale is Specific Gravity, in which distilled water equals 1.000 as the initial point. Liquids lighter than water are scaled below 1.000 specific gravity and liquids heavier than water are scaled above 1.000 specific gravity.

Many other scales are commonly used, such as API, Brix, Baume, Plato, etc. All of which are convertible into specific gravity by formula.

Hydrometers are usually calibrated at 15°C/60°F. To determine the density of a liquid, the liquid should be at 15°C/60°F. If the temperature varies, the liquid will either contract or expand, depending upon the temperature. Therefore, the density fluctuates with the temperature. Where there is a variation from the standard 15°C/60°F, corrections must be applied to the hydrometer reading. To assure proper corrections, a separate accurate thermometer should be used, or a hydrometer in combination with a thermometer, which is sometimes referred to as a "thermohydrometer."

The correct method of reading a hydrometer follows:

- A. Observe a point below the plane of the liquid surface. The surface should appear as an ellipse (Fig. 1).
- B. The line of vision is raised until the surface, seen first as an ellipse, becomes a straight line (Fig. 2).
- C. The point at which this line cuts the hydrometer scale is the reading of the instrument (Fig. 3).

If the liquid is not sufficiently clear for readings to be made in this manner, read from above the surface and estimate as accurately as possible the point to which the liquid rises on the hydrometer stem. Since hydrometers are calibrated to give correct indications when read at the principal surface of the liquid, correct the reading just taken at the upper edge of the meniscus by an amount equal to this height above the principal surface of the liquid. The amount of correction can be determined with sufficient accuracy for most purposes by taking a few readings on the upper and lower meniscus in a clear liquid of the same character as that being tested and noting the differences.



Fig. 1

Fig. 2

Point of Reading

Fig. 3

Alcohol Hydrometers - Tralle and Proof Scales

Verify the alcohol content of distilled spirits

Both models include the same ranges; model 6612-2TS also features an internal thermometer with SafetyBLUE fill for measuring solution temperature from -10 to $+100^{\circ}$ F.

- Calibrated for use at 15°C/60°F

NOTE: Not for use with beer or wine.

Alcohol Hydrometers - Tralle and Proof Scales

ltem No.	Range	Subdivisions/ Tolerance	Range	Subdivisions/ Tolerance	Approx. Length (in/mm)
		TRALLE		PROOF	
6612-1	0 to 100%	1% / ±1%	0 to 200	2 / ±2%	12 / 305
6612-2TS	0 to 100%	1% / ±1%	0 to 200	2 / ±2%	14 / 355

Alcohol Hydrometers - Proof Scale, Internal Revenue Service Spec.

Verify the alcohol content of your ethyl alcohol-based spirits with these hydrometers

- Tolerances match those laid out by the Internal Revenue Service specifications
- Calibrated for use at 15°C/60°F

Alcohol Hydrometers - IRS Specification

6613-B 80 to 120 B 0.5 ±0.5% 6613-F 0 to 20 F 0.2 ±0.3% 6613-G 20 to 40 G 0.2 ±0.4%	9 / 230 12 / 305 12 / 305
	12 / 305
6613-G 20 to 40 G 0.2 ±0.4%	
6613-H 40 to 60 H 0.2 ±0.4%	12 / 305
6613-I 60 to 80 I 0.2 ±0.3%	12 / 305
6613-K 75 to 95 K 0.2 ±0.3%	12 / 305
6613-L 90 to 110 L 0.2 ±0.3%	12 / 305
6613-M 105 to 125 M 0.2 ±0.3%	12 / 305
6613-N 125 to 145 N 0.2 ±0.3%	12 / 305
6613-P 145 to 165 P 0.2 ±0.3%	12 / 305
6613-Q 165 to 185 Q 0.2 ±0.2%	12 / 305
6613-R 185 to 206 R 0.2 ±0.2%	12 / 305

Alcohol Hydrometers w/3-point NIST Certificate and PVC Case- Proof Scale, Internal Revenue Service Specification

Verify the alcohol content of your ethyl alcohol-based spirits with these hydrometers Tolerances match those laid out by the Internal Revenue Service specifications.

- Commonly used in distilleries requiring certification

- Calibrated for use at 15°C/60°F

INCLUDES: Hydrometer, NIST-traceable certificate with 3 data points, and a protective PVC case

Alcohol Hydrometers w/ NIST Cert. IRS Specs. & Case

Item No.	Proof Range	IRS Size	Subdivisions	Tolerance	Approx. Length (in/mm)
6613-B-C	80 to 120	В	0.5	±0.5%	9 / 230
6613-F-C	0 to 20	F	0.2	±0.3%	12 / 305
6613-G-C	20 to 40	G	0.2	±0.4%	12 / 305
6613-H-C	40 to 60	Н	0.2	±0.4%	12 / 305
6613-I-C	60 to 80	I	0.2	±0.3%	12 / 305
6613-K-C	75 to 95	К	0.2	±0.3%	12 / 305
6613-L-C	90 to 110	L	0.2	±0.3%	12 / 305
6613-M-C	105 to 125	М	0.2	±0.3%	12 / 305
6613-N-C	125 to 145	Ν	0.2	±0.3%	12 / 305
6613-P-C	145 to 165	Р	0.2	±0.3%	12 / 305
6613-Q-C	165 to 185	Q	0.2	±0.2%	12 / 305
6613-R-C	185 to 206	R	0.2	±0.2%	12 / 305

<section-header>A CONTRACT OF CON

Tel: (866) 433-6682

31

6613-F

6612-2TS

Plato Hydrometers with Thermometers

Calibrated to show the concentration of extract as a percentage by weight in brewery wort

For example, a 5°P reading indicates 5 g of extract per 100 g of wort.

- Primarily used in the brewing industry
- Calibrated for use at 68°F/20°C

Plato Hydrometers with Thermometers

Item No.	Plato Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
6614TS-5	0 to 8.5°	0.1°	14 / 360	0 to 50°C	1°C	SafetyBLUE
6614TS-6	7.5 to 16°	0.1°	14 / 360	0 to 50°C	1°C	SafetyBLUE
6614TS-7	15.5 to 24°	0.1°	14 / 360	0 to 50°C	1°C	SafetyBLUE
6614TS-8	0 to 32°	0.5°	14 / 380	30 to 120°F	2°F	SafetyBLUE

API ASTM Hydrometers with Thermometer

Chosen as the Standard Scale for Petroleum

The API Scale was selected as the standard hydrometer scale for petroleum products by the American Petroleum Institute (API),

the U.S. Bureau of Mines, and the National Institute of Standards and Technology (NIST).

- The API Scale is based on the following formula: $^{\circ}API @ 60^{\circ}F = (141.5/(Specific Gravity at 60^{\circ}F) 131.5$
- The thermometer scale is located in the body of the hydrometer
- Calibrated for use at 15°C/60°F

API ASTM Hydrometers with Thermometer

Item No.	ASTM No.	API Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
6752HTS	52H	9 to 21°	0.1°	15 / 380			
6753HTS	53H	19 to 31°	0.1°	15 / 380			
6754HTS	54H	29 to 41°	0.1°	15 / 380	-	2°F	SafetyBLUE
6755HTS	55H	39 to 51°	0.1°	15 / 380	0 to 150°F		
6756HTS	56H	49 to 61°	0.1°	15 / 380			
6757HTS	57H	59 to 71°	0.1°	15 / 380			

Battery Hydrometer - Syphon Set

For Measuring Battery Acid

The Battery Acid Hydrometer Set is used in many industrial settings including, fleet maintenance, automotive services, solar-powered system maintenance, and general industrial applications.

- The rubber parts are made of nitrile rubber, which is chemically inert and durable
- A reinforced box provides storage and is compartmented to eliminate breakage
- Calibrated for use at 25°C/77°F

INCLUDES: Specific Gravity Hydrometer, glass syphon tube with rubber bulb, nozzle, and clamp

Battery Hydrometers

Item No.	Description	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)	
6605-5	Hydrometer and Syphon Set	1.150 to 1.300	0.005	20 / 507	6605-5
6605-5H	Hydrometer Only	1.150 to 1.300	0.005	8.7 / 220	_
6605-0SY	Glass syphon tube, rubber bulb, nozzle, and clamp only			20 / 507	

Baume (Heavy) Hydrometers

These Baume Hydrometers are for liquids heavier than water

- The Baume scale is based on the following formula: Specific Gravity = 145/(145-degrees Baume)
- Calibrated for use at 15°C/60°F

Baume (He	avy) Hydrometer	S		Baume (He	Baume (Heavy) Hydrometers			
Item No.	Baume Range	Subdivisions	Length (in/mm)	Item No.	Baume Range	Subdivisions	Length (in/mm)	
6609-1	0 to 12°	0.1°		6609-10	0 to 35°	0.5°		
6609-2	9 to 21°	0.1°		6609-11	0 to 50°	0.5°		6
6609-3	19 to 31°	0.1°		6609-12	35 to 70°	0.5°	12 / 305	
6609-4	29 to 41°	0.1°	12 / 305	6609-13	0 to 50°	1.0°		
6609-5	39 to 51°	0.1°		6609-14	0 to 70°	1.0°		
6609-8	0 to 15°	0.1°		6609-15	0 to 90°	1.0°		
6609-9	0 to 25°	0.2°						

Tel: (866) 433-6682

6614TS-5

6756HTS

Brix Hydrometers

Brix Hydrometers are calibrated to show the percentage of sucrose by weight at 20°C/68°F

The Brix scale is based on the following: 1°Brix = 1% sucrose by weight at the specified temperature (20°C/68°F)

Brix Hydrometers

Item No. Brix Range		Subdivisions	Approx. Length (in/mm)	
6601-1	0 to 12°	0.1°	13 / 330	
6601-2	9 to 21°	0.1°	13 / 330	
6601-3	19 to 31°	0.1°	13 / 330	
6601-4	29 to 41°	0.1°	13 / 330	
6601-5	39 to 51°	0.1°	13 / 330	

Brix Hydrometers

-				
Item No.	Brix Range	Subdivisions	Approx. Length (in/mm)	
6601-10	0 to 35°	0.5°	13 / 330	
6601-11	35 to 70°	0.5°	13 / 330	
6601-13	-5 to 5°	0.1°	13 / 330	
6601-14	5 to 15°	0.1°	13 / 330	
6601-15	15 to 25°	0.1°	13 / 330	

6601-15

6601TS-1F

Brix Hydrometers with °C Thermometers

Brix Hydrometers are calibrated to show the percentage of sucrose by weight at 20°C/68°F

The Brix scale is based on the following: 1°Brix = 1% sucrose by weight at the specified temperature (20°C/68°F) - The thermometer includes a correction scale printed opposite the temperature scale for conversion of the reading to 20°C/68°F

Brix Hydrometers with °C Thermometers

Item No.	Brix Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
6601TS-1	0 to 12°	0.1°	14.5 / 370			
6601TS-2	9 to 21°	0.1°	14.5 / 370			
6601TS-3	19 to 31°	0.1°	14.5 / 370			
6601TS-4	29 to 41°	0.1°	14.5 / 370			
6601TS-5	39 to 51°	0.1°	14.5 / 370			
6601TS-6	49 to 61°	0.1°	14.5 / 370	0 to 5000	100	
6601TS-8	69 to 81°	0.1°	14.5 / 370	0 to 50°C	1°C	SafetyBLUE
6601TS-10	0 to 35°	0.5°	14.5 / 370			
6601TS-12	0 to 70°	1.0°	14.5 / 370			
6601TS-13	-5 to 5°	0.1°	14.5 / 370			
6601TS-14	5 to 15°	0.1°	14.5 / 370			
6601TS-15	15 to 25°	0.1°	14.5 / 370			

Brix Hydrometers with °F Thermometers

Brix Hydrometers are calibrated to show the percentage of sucrose by weight at 20°C/68°F

The Brix scale is based on the following: 1° Brix = 1% sucrose by weight at the specified temperature (20° C/68°F)

- The thermometer includes a correction scale printed opposite the temperature scale for conversion of the reading to 20°C/68°F

Brix Hydrome	eters With °F T	hermometers				
Item No.	Brix Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
6601TS-1F	0 to 12°	0.1°	14.5 / 370			
6601TS-2F	9 to 21°	0.1°	14.5 / 370			
6601TS-3F	19 to 31°	0.1°	14.5 / 370	30 to 130°F	2°F	SafetyBLUE
6601TS-10F	0 to 35°	0.5°	14.5 / 370			
6601TS-13F	-5 to 5°	0.1°	14.5 / 370			

Tel: (866) 433-6682

Calcium Chloride (CaCl2) Specific Gravity/Freezing Point Hydrometer

This hydrometer measures the specific gravity and freezing point of calcium chloride in solution

- Calibrated for use at 15°C/60°F

Calcium Chloride (CaCl2) Specific Gravity/Freezing Point Hydrometer

Item No.	Range	Subdivisions	Approx. Length (in/mm)
6611.0	1.000 to 1.280 Specific Gravity	0.002	12/305
6611-3	+30 to -40°F Freezing Point	5°	127305

Sodium Chloride Hydrometers

Measure the percentage of sodium chloride in solution with these hydrometers Model 6611-1 measures the % saturation of sodium chloride in solution; Model 6611-2 measures the % by weight of sodium chloride in solution.

- Calibrated for use at 15°C/60°F

Sodium Ch	loride Hydrometers			
Item No.	Range	Subdivisions	Approx. Length (in/mm)	
6611-1	0 to 100% saturation	1.0%	12 / 305	6611-1
6611-2	0 to 26.5% by weight	0.5%	12 / 305	

Specific Gravity, also known as relative density, is the ratio of the mass of a liquid to the mass of an equal volume of distilled water.

Ultra-Precision Specific Gravity Hydrometers

Featuring smaller ranges and higher resolution, with subdivisions of 0.0005

- Calibrated for use at 15°C/60°F

Ultra-Precision Specific Gravity Hydrometers

Item No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)
6602-2	0.700 to 0.770	0.0005	13 / 330
6602-3	0.760 to 0.830	0.0005	13 / 330
6602-4	0.820 to 0.890	0.0005	13 / 330
6602-5	0.880 to 0.950	0.0005	13 / 330
6602-6	0.940 to 1.010	0.0005	13 / 330
6602-7	1.000 to 1.070	0.0005	13 / 330
6602-8	1.060 to 1.130	0.0005	13 / 330
6602-9	1.120 to 1.190	0.0005	13 / 330
6602-10	1.180 to 1.250	0.0005	13 / 330
6602-11	1.240 to 1.310	0.0005	13 / 330
6602-12	1.300 to 1.370	0.0005	13 / 330
6602-13	1.360 to 1.430	0.0005	13 / 330
6602-14	1.420 to 1.490	0.0005	13 / 330
6602-15	1.480 to 1.550	0.0005	13 / 330
6602-19	1.720 to 1.790	0.0005	13 / 330

6602-7

6611-3

Precision Specific Gravity Hydrometers

Precision Specific Gravity Hydrometers feature subdivisions from 0.001 to 0.01

- Calibrated for use at 15°C/60°F

Precision Specific Gravity Hydrometers

ltem No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)
6603-10	0.700 to 0.810	0.001	12 / 305
6603-11	0.800 to 0.910	0.001	12 / 305
6603-12	0.900 to 1.000	0.001	12 / 305
6603-1	1.000 to 1.220	0.002	12 / 305
6603-2	1.200 to 1.420	0.002	12 / 305
6603-3	1.400 to 1.620	0.002	12 / 305
6603-4	1.600 to 1.820	0.002	12 / 305
6603-5	1.800 to 2.020	0.002	12 / 305
6603-21	2.200 to 2.420	0.002	12 / 305
6603-22	2.400 to 2.620	0.002	12 / 305
6603-13	0.650 to 1.000	0.005	12 / 305
6603-6	1.000 to 1.600	0.005	12 / 305
6603-7	1.000 to 2.000	0.010	12 / 305
6603-8	2.000 to 3.000	0.010	12 / 305
6603-9	3.000 to 4.000	0.010	12 / 305

6603-1



6602TS-7

Precision Specific Gravity Hydrometers with Thermometer

No need for a separate thermometer to check liquid temperature

- These Hydrometers feature an internal thermometer for calculating temperature corrections

- Calibrated for use at 15°C/60°F

Precision Specific Gravity Hydrometers with Thermometer

Item No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
6602TS-7	1.000 to 1.070	0.001	15 / 385			
6602TS-8	1.060 to 1.130	0.001	15 / 385	20 to 150°F	2°F	SafetyBLUE
6603TS-1	1.000 to 1.220	0.002	12 / 305			

Precision Short-Form Specific Gravity Hydrometers

Short-Form Hydrometers use less volume of the test liquid, while still offering 0.001 resolution

- Calibrated for use at 15°C/60°F

Precision Short-Form Specific Gravity Hydrometers

Item No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)
6602-4S	0.820 to 0.890	0.001	6.5 / 165
6602-5S	0.880 to 0.950	0.001	6.5 / 165
6602-6S	0.940 to 1.010	0.001	6.5 / 165
6602-7S	1.000 to 1.070	0.001	6.5 / 165
6602-8S	1.060 to 1.130	0.001	6.5 / 165
6602-9S	1.120 to 1.190	0.001	6.5 / 165
6602-10S	1.180 to 1.250	0.001	6.5 / 165

6602-7S

ASTM Specific Gravity Hydrometers

Manufactured to the specifications of the American Society for Testing and Materials (ASTM)

Select the hydrometer that you need by matching the ASTM number shown in the table.

- Calibrated for use at 15°C/60°F

ASTM Specific Gravity Hydrometers

ASTM Specific Gravity Hydrometers

ASTM No.	Specific Gravity Range	Subdivi- sions	Approx. Length (in/mm)	Item No.	ASTM No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)	
111H	1.000 to 1.050	0.0005	13 / 330	67125H	125H	1.000 to 1.050	0.001	12 / 260	
112H	1.050 to 1.100	0.0005	13 / 330	67126H	126H	1.050 to 1.100	0.001	12 / 260	
113H	1.100 to 1.150	0.0005	13 / 330	67127H	127H	1.100 to 1.150	0.001	12 / 260	
114H	1.150 to 1.200	0.0005	13 / 330	67128H	128H	1.150 to 1.200	0.001	12 / 260	
115H	1.200 to 1.250	0.0005	13 / 330	67129H	129H	1.200 to 1.250	0.001	12 / 260	
116H	1.250 to 1.300	0.0005	13 / 330	67130H	130H	1.250 to 1.300	0.001	12 / 260	
117H	1.300 to 1.350	0.0005	13 / 330	67131H	131H	1.300 to 1.350	0.001	12 / 260	
118H	1.350 to 1.400	0.0005	13 / 330	67132H	132H	1.350 to 1.400	0.001	12 / 260	
119H	1.400 to 1.450	0.0005	13 / 330	67133H	133H	1.400 to 1.450	0.001	12 / 260	
120H	1.450 to 1.500	0.0005	13 / 330	67134H	134H	1.450 to 1.500	0.001	12 / 260	
	No. 111H 112H 113H 114H 115H 116H 117H 118H 119H	No. Range 111H 1.000 to 1.050 112H 1.050 to 1.100 113H 1.100 to 1.150 114H 1.150 to 1.200 115H 1.200 to 1.250 116H 1.250 to 1.300 117H 1.300 to 1.350 118H 1.350 to 1.400 119H 1.400 to 1.450	No. Range sions 111H 1.000 to 1.050 0.0005 112H 1.050 to 1.100 0.0005 113H 1.100 to 1.150 0.0005 114H 1.150 to 1.200 0.0005 115H 1.200 to 1.250 0.0005 116H 1.250 to 1.300 0.0005 117H 1.300 to 1.350 0.0005 118H 1.350 to 1.400 0.0005 119H 1.400 to 1.450 0.0005	No. Range sions (in/mm) 111H 1.000 to 1.050 0.0005 13 / 330 112H 1.050 to 1.100 0.0005 13 / 330 113H 1.100 to 1.150 0.0005 13 / 330 113H 1.100 to 1.200 0.0005 13 / 330 114H 1.150 to 1.200 0.0005 13 / 330 115H 1.200 to 1.250 0.0005 13 / 330 116H 1.250 to 1.300 0.0005 13 / 330 117H 1.300 to 1.350 0.0005 13 / 330 118H 1.350 to 1.400 0.0005 13 / 330 119H 1.400 to 1.450 0.0005 13 / 330	No. Range sions (in/mm) 111H 1.000 to 1.050 0.0005 13 / 330 67125H 112H 1.050 to 1.100 0.0005 13 / 330 67126H 113H 1.100 to 1.150 0.0005 13 / 330 67127H 114H 1.150 to 1.200 0.0005 13 / 330 67128H 115H 1.200 to 1.250 0.0005 13 / 330 67129H 116H 1.250 to 1.300 0.0005 13 / 330 67130H 117H 1.300 to 1.350 0.0005 13 / 330 67131H 118H 1.350 to 1.400 0.0005 13 / 330 67132H 119H 1.400 to 1.450 0.0005 13 / 330 67133H	No. Range sions (in/mm) No. 111H 1.000 to 1.050 0.0005 13 / 330 67125H 125H 112H 1.050 to 1.100 0.0005 13 / 330 67126H 126H 113H 1.100 to 1.150 0.0005 13 / 330 67127H 127H 114H 1.150 to 1.200 0.0005 13 / 330 67128H 128H 115H 1.200 to 1.250 0.0005 13 / 330 67129H 129H 116H 1.250 to 1.300 0.0005 13 / 330 67130H 130H 117H 1.300 to 1.350 0.0005 13 / 330 67131H 131H 118H 1.350 to 1.400 0.0005 13 / 330 67132H 132H 119H 1.400 to 1.450 0.0005 13 / 330 67133H 133H	No. Range sions (in/mm) No. Range 111H 1.000 to 1.050 0.0005 13 / 330 67125H 125H 1.000 to 1.050 112H 1.050 to 1.100 0.0005 13 / 330 67126H 126H 1.050 to 1.100 113H 1.100 to 1.150 0.0005 13 / 330 67127H 127H 1.100 to 1.150 114H 1.150 to 1.200 0.0005 13 / 330 67128H 128H 1.150 to 1.200 115H 1.200 to 1.250 0.0005 13 / 330 67129H 129H 1.200 to 1.250 116H 1.250 to 1.300 0.0005 13 / 330 67130H 130H 1.250 to 1.300 117H 1.300 to 1.350 0.0005 13 / 330 67131H 131H 1.300 to 1.350 118H 1.350 to 1.400 0.0005 13 / 330 67132H 132H 1.350 to 1.400 119H 1.400 to 1.450 0.0005 13 / 330 67133H 133H 1.400 to 1.450	No. Range sions (in/mm) No. Range 111H 1.000 to 1.050 0.0005 13 / 330 67125H 125H 1.000 to 1.050 0.001 112H 1.050 to 1.100 0.0005 13 / 330 67126H 126H 1.050 to 1.100 0.001 113H 1.100 to 1.150 0.0005 13 / 330 67127H 127H 1.100 to 1.150 0.001 114H 1.150 to 1.200 0.0005 13 / 330 67128H 128H 1.150 to 1.200 0.001 115H 1.200 to 1.250 0.0005 13 / 330 67129H 129H 1.200 to 1.250 0.001 116H 1.250 to 1.300 0.0005 13 / 330 67130H 130H 1.250 to 1.300 0.001 117H 1.300 to 1.350 0.0005 13 / 330 67131H 131H 1.300 to 1.350 0.001 117H 1.300 to 1.350 0.0005 13 / 330 67132H 132H 1.400 0.001 118H 1.350 to 1.400 0.0005 13 / 33	No. Range sions (in/mm) No. Range (in/mm) 111H 1.000 to 1.050 0.0005 13 / 330 67125H 125H 1.000 to 1.050 0.001 12 / 260 112H 1.050 to 1.100 0.0005 13 / 330 67125H 126H 1.050 to 1.100 0.001 12 / 260 113H 1.100 to 1.150 0.0005 13 / 330 67127H 127H 1.100 to 1.150 0.001 12 / 260 114H 1.150 to 1.200 0.0005 13 / 330 67128H 128H 1.150 to 1.200 0.001 12 / 260 115H 1.200 to 1.250 0.0005 13 / 330 67129H 129H 1.200 to 1.250 0.001 12 / 260 116H 1.250 to 1.300 0.0005 13 / 330 67130H 130H 1.250 to 1.300 0.001 12 / 260 117H 1.300 to 1.350 0.0005 13 / 330 67131H 131H 1.350 to 1.400 0.001 12 / 260 118H 1.350 to 1.400 0.0005 13 / 330

Wide-Range Specific Gravity Hydrometers

Ideal when you aren't sure of the approximate value of your liquid

- Also use for multiple liquids with different specific gravity within the range of the hydrometer, allowing multiple uses with one unit

- Calibrated for use at 15°C/60°F

Wide-Range Specific Gravity Hydrometers

Item No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)
6604-1	1.000 to 1.250	0.005	6.5 / 165
6604-2	1.200 to 1.450	0.005	6.5 / 165
6604-3	1.400 to 1.650	0.005	6.5 / 165
6604-4	1.600 to 1.850	0.005	6.5 / 165
6604-5	1.800 to 2.050	0.005	6.5 / 165

6604-1

CITES I

Tel: (866) 433-6682

Universal Specific Gravity Hydrometer

Ideal when you aren't sure of the approximate value of your liquid

This dual-scale model measures specific gravity and Baume. Also use for multiple liquids with different readings, allowing multiple uses with one hydrometer.

- Calibrated for use at 15°C/60°F

Universal Specific Gravity Hydrometer

Item No.	Specific Gravity Range	Subdivisions	Baume Range	Subdivisions	Approx. Length (in/mm)
6605-1	0.700 to 2.000	0.005 (from 0.7 to 1.0); 0.01 (from 1.0 to 2.0)	0 to 72° (Heavy); 70 to 10° (Light)	1°	15 / 380

Dual Scale Specific Gravity / Baume Hydrometers

Dual-Scale Hydrometers have two scales on the stem, covering different applications in one unit

The Baume scale has two different scales: one for liquids heavier than water and one for liquids lighter than water. See table below for Baume ranges.

- Calibrated for use at 15°C/60°F

Dual Scale Specific Gravity / Baume Hydrometers

Item No.	Specific Gravity Range	Baume Range	Subdivisions	Approx. Length (in/mm)
6603DS-1	1.000 to 1.220	0 to 26° (Heavy)	0.002 / 0.2°	12 / 305
6603DS-1S	1.000 to 1.225	0 to 26° (Heavy)	0.005 / 1°	12 / 305
6603DS-2	1.200 to 1.420	24 to 42° (Heavy)	0.002 / 0.2°	12 / 305
6603DS-2S	1.200 to 1.425	24 to 42° (Heavy)	0.005 / 1°	12 / 305
6603DS-3	1.400 to 1.620	42 to 55° (Heavy)	0.002 / 0.2°	12 / 305
6603DS-4	1.600 to 1.820	55 to 65° (Heavy)	0.002 / 0.2°	12 / 305
6603DS-5	1.800 to 2.020	64 to 72° (Heavy)	0.002 / 0.2°	12 / 305
6603DS-6	1.000 to 1.450	0 to 45° (Heavy)	0.005 / 0.5°	12 / 305
6603DS-6S	1.000 to 1.400	0 to 41° (Heavy)	0.010 / 1°	12 / 305
6603DS-7	1.000 to 2.000	0 to 72° (Heavy)	0.010 / 1°	12 / 305
6603DS-13	0.600 to 1.000	10 to 100° (Light)	0.005 / 1°	12 / 305
6604DS-04	0.70 to 1.00	10 to 70° (Light)	0.01 / 1°	6.5 / 165

6603DS-1

37

Liquid Petroleum Gas (LPG) Specific Gravity Hydrometer with Thermometer

LPG Hydrometers measure the specific gravity of LPG such as propane, butane, and other light hydrocarbons

Includes an internal thermometer for temperature measurement.

- Calibrated for use at 15°C/60°F

Liquid Petroleum Gas (LPG) Specific Gravity Hydrometer with Thermometer

Item No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)	Thermometer Range	Thermometer Subdivision	Thermometer Liquid Fill
67101HTS	0.500 to 0.650	0.001	14.4 / 365	30 to 90°F	1°F	SafetyBLUE

Soil ASTM Specific Gravity Hydrometer

Measure the specific gravity of soil samples in suspension

Often used with a sedimentation cylinder for soil analysis.

- Calibrated for use at 20°C/68°F

Soil ASTM Specific Gravity Hydrometer

Item No.	ASTM No.	Specific Gravity Range	Subdivisions	Approx. Length (in/mm)
67151H	151H	0.995 to 1.038	0.001	11 / 280

67151H



Soil ASTM Soil Colloids Hydrometer

Measure the amount of soil colloids in grams of soil samples in suspension Often used with a sedimentation cylinder for soil analysis.

- Calibrated for use at 20°C/68°F

Soil ASTM Soil Colloids Hydrometer

Item No.	ASTM No.	Soil Colloids Range	Subdivisions	Approx. Length (in/mm)
67152H	152H	-5 to 60g	1.0	11 / 280

67152H

67101HTS

Hydrometer Cases

PVC Hydrometer Cases help protect your hydrometer from damage

Ideal for storing your hydrometer when not in use, these cases feature a foam or felt padded insert and padded bottom and cap.

Hydrometer Cases

Item No.	Description	Approx. Length (in/mm)
66CS-8	PVC Case	8.5 / 216
66CS-8F	PVC Case, short	8.5 / 216
66CS-13	PVC Case	13.5 / 343
66CS-13J	PVC Case, wide-body	13.5 / 343
66CS-16	PVC Case	16.5 / 420

Hydrometer Jars

Made of borosilicate glass, these jars feature a beaded rim and a circular base

Sized properly to eliminate surface tension effects that lead to inaccurate readings.

- Model 21050-1000-L and 21000-1000-L have a graduation line at 1000 mL for precise filling and are used as a sedimentation cylinder

Hydrometer Jars					
Item No.	Description	Maximum Hydrometer Length (mm)			
21050-100	100 mL Hydrometer Jar	185			
21050-250	250 mL Hydrometer Jar	280			
21050-500	500 mL Hydrometer Jar	360			
21050-600	600 mL Hydrometer Jar	390			
21050-1000	1000 mL Hydrometer Jar	400			
21050-1000-L	1000 mL Hydrometer Jar with Graduation Line	400			



Hydrometer Cases & Jars: Reference Guide

Hydrometer Cases & Jars Reference Gulde

Hydrometer Series	Description	Approx. Length (mm)	Uses Case	Uses Jar
6601-Series	Brix	330	66CS-13	21050-500
6601TS-Series	Brix w/Thermometer	370	66CS-16	21050-600 or -1000
6602, 6603-Series	Specific Gravity	305	66CS-13	21050-500
6603DS-Series	Specific Gravity & Baume	305	66CS-13	21050-500
6604-Series	Specific Gravity	165	66CS-8F	21050-100
6605-1	Specific Gravity & Baume: Universal	380	66CS-16	21050-600 or -1000
6609-Series	Baume: Heavy	305	66CS-13	21050-500
6611-Series	Salt	305	66CS-13	21050-500
6612-1	Alcohol: Tralle and Proof	305	66CS-13	21050-500
6612-2TS	Alcohol: Tralle and Proof w/Thermometer	355	66CS-16	21050-600 or -1000
6613-Series	Alcohol: Proof, IRS	230-305	66CS-13J	21050-250 or -500
6614TS-Series	Plato w/Thermometer	360-380	66CS-16	21050-600 or -1000
675xHTS-Series	API, ASTM w/Thermometer	380	66CS-16	21050-600 or -1000
67111H-67134H	Specific Gravity: ASTM	260-330	66CS-13	21050-250 or -500
67101HTS	LPG w/Thermometer	365	66CS-16	21050-600 or -1000
6715xH	Specific Gravity or Soil Colloids: ASTM	280	66CS-13J	21050-250 or -500



Easy Identification

5 different colored nose cones help differentiate department, task or user; as well as a labeling area on the side of the unit



Magnetic & Screw Wall-Mount



3 Modes Bright LEDs indicate 3 operation modes: high, low, & gravity



RF3000[®]

Packed with features for comfortable and accurate pipetting

The powerful pump offers rapid, yet sensitive aspiration and dispensing, has adjustable valves and is microprocessor controlled for constant reliability and accuracy

- Long-life li-ion battery, with quick charge-up to 20 hours use
- Toggle operation by pressing the large mode button
- cone to stabilize small volume and thinner pipettes



the unit



Storage Stand doubles as a charging station

Item No.	Volume Range mL	L x W x H in	L x W x H cm		
HS3000	1–100	9 x 8.5 x 5	22.9 x 21.6 x 12.7		
Replacement p	arts				
HS5000RFFIL	RF3000 [®] Replacement Filters, <i>Pack of 5</i>				
120669	RF3000 [®] Universal Power Adaptor 5VDC Micro USB Plug				
HS300502	RF3000 [®] Li-Ion Rechargeable Battery, One year	warranty on battery include	d		
120487	RF3000® Nose Cones 🛛 Assorted* 🔳 🔳 📕 📕	Set of 5			
HS5000RFRFA	RF3000 [®] Replacement Filter Adapter				
HS5000RFRP	RF3000 [®] Replacement Pipette Silicone Adapter				
		*Assorted colors (Black, Bl	ue, Grey, Red and Yellow		

Specifications Micro-USB connector Power Rechargeable li-lon battery (replaceable) Filter PTFE/25mm dia/0.45 µm filter Pipettes 1-100 mL, glass and plastic **Pipette Nozzle** Polypropylene

Package Includes
RF3000 [®] Pipette Controller
Charging Stand and Wall-Mountable/Magnetic Holder
Nozzle Adapter for use with Small Pipettes
Li-lon Rechargeable Battery
Five Nose Cones: Black, Yellow, Red, Grey and Blue
5VDC Micro USB Plug
6 ft (183 cm) Cable
1 Low Voltage, Double Insulated Power Adapter (100- 240 VAC, 50/60 Hz) with 4 Interchangeable Plugs

sales@novatech-usa.com

- An adapter can be fitted to the nose

Tel: (866) 433-6682



- Low-battery indicator

- New USB connecter ensures the

appropriate charger is used with

Can be recharged when in use

www.novatech-usa.com

Pipette Controller

Precise fluid control at your finger tips

Comfortable to hold and easy to use, the manual inline pipette controller was designed with an ergonomic grip and bulb for simple and precise operation

A T-bar thumb lever controls the aspirating and dispensing speeds from serological pipettes from 1 to 100 mL in size

- Conveniently accommodates either glass or plastic serological or volumetric pipettes ranging from 1–100 mL
- Includes a replaceable .45 μm hydrophobic filter to protect your samples and internal components



Nose cone assembly only

Item No.	Color	Volume Range mL	L x W x H in	L x W x H cm
120479	Blue 🗖	1–100	9 x 2.1 x 2.1	23 x 5.4 x 5.4

Replacement Parts

Item No.	Description	Color
120604	Nose Cone with Adapter	Blue 🗖

Operation Is Simple:

Squeeze the bulb to create a vacuum to draw up fluid Push the control lever forward (down) to dispense the liquid

Push the control lever backward (up) to aspirate liquid through a pipette

Press the central bulb on the unit to blow out any remaining fluid if necessary





Stay Organized with three additional nose cones (green, white, blue) for color identification for both the Pipette Controller & RF1000

RF1000

Lightweight and easy to use

The RF1000 manual pipette controller is uniquely designed for one-handed operation

Simply squeeze the main bulb and push the toggle forward to aspirate or back to dispense. Push the blowout bulb to expel any liquid remaining in the pipette

- Tapered silicone rubber pipette adapter allows a large range of pipette sizes ranging 1–100 mL and is replaceable
- Includes a replaceable .45 µm hydrophobic filter to protect your samples and internal components




Nose cone assembly only

Item No.	Color	Volume Range mL	L x W x H in	L x W x H cm
HS1000RFU	Blue 🗖	1–100	7.1 x 1.8 x 4.7	18 x 4.5 x 12

Replacement Parts

Item No.	Description	Color
HS5000RFFIL	Replacement Filters, Pack of 5	
120604 Nose Cone with Adapter		Blue

Tel: (866) 433-6682

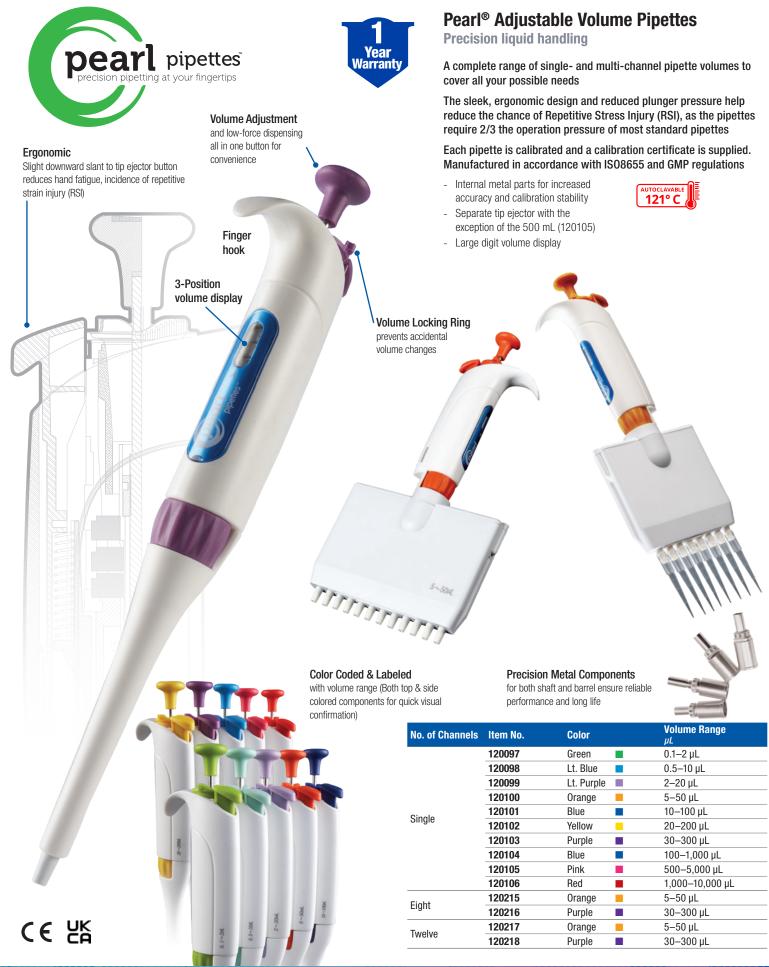

www.novatech-usa.com



Universal Carousel Pipette Stand

Hold and store pipettes in style with the Universal Carousel Pipette Stand by Heathrow Scientific that holds up to 8 single-channel, 4 multichannel, or a combination of both pipettes

A sleek and modern design enables this stand to securely hold virtually every known brand of pipette in the marketplace making it truly 'universal' while adding a pop of color to a bench top

Reagent Reservoirs

Multi-channel reservoirs by Heathrow Scientific are superior in every way with thicker walls, crush-resistant "turrets" at the corners, easy pour-spouts, 25 mL graduation marks, and tabs to prevent stacked reservoirs from sticking together

Pearl® Pipettes

Pearl Pipettes by Heathrow Scientific were specifically engineered for ease of use and comfort

The sleek, ergonomic design and reduced plunger pressure help reduce the chance of Repetitive Stress Injury (RSI), as the pipettes require 2/3 the operation pressure of most standard pipettes

Each pipette calibrated and a calibration certificate is supplied

Manufactured in accordance with ISO8655 and GMP regulations

Pipette Starter Kit Item No. 120554

Universal Carousel Pipette Stand	For more information see page 80				
Upper Holder Color	Lower Holder Color	Base Width in	Top W x H in	Base Width cm	Top W x H cm
Assorted/Clear	Clear	6.2	9 x 16.1	15.8	22.9 x 40.8

*Assorted colors (Purple, Blue, Green, Grey, Red Orange, Yellow and Clear)

Pearl [®] Pipet	Pearl® Pipettes - Single Channel For more information see page 42							
Color			Volume Range µL					
Lt. Purple			2–20 µL					
Yellow			20–200 µL					
Blue			100–1,000 µL					
Reagent Res	servoirs	For more infor	mation see page	86				
Color		Volume mL	Material	Sterility	L x W x H in		L x W x H cm	
White		50	Polystyrene	Sterile	4 x 1.1 x 1.2		10.2 x 2.8 x 3	Pack of 5

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

*All parts available separately





Rapid, accurate colony counter


Combines a multi-function electronic counter with a Sharpie® Pen for marking to prevent missing or double-counting colonies

- Light, ergonomic body is balanced for easy manipulation Select between an audible beep or an
- Count up/down verification
- Quick and easy to change between
 - different colored markers to check different colony counts in the same view
- LED flash to acknowledge count Store up to 32 separate counts and
- display the total of all counts

Package Includes:

_

- eCount Colony Counter _
- Black Sharpie® Pen (Page 50) _
- _ Long-life button battery included



Weighted Stand



US Patent No. D564,385 EP Registered Design No. 705751-0001

Item No.	L x W in	L x W cm	
120000	7.4 x 1.2*	17 x 3*	
120228	CR1225 Battery		

CR1225 Batter	y		
	*Mogeuromonte et	hown aro with	Charnia®

Measurements shown are with Sharpie® Pen inserted



eCount with Mini-Light Box with Mini-Magnifier, page 45




Weighted Stand for bench top use





Lock Counter Off to allow use of the marker without registering more counts

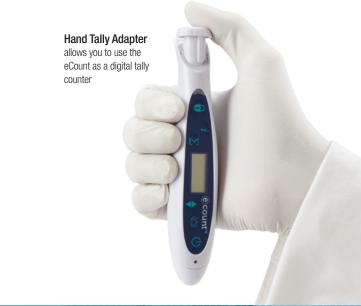



Mini-Light Box and Mini-Magnifier

Perfect accessories for the eCount or use as stand-alone items

Mini-Light Box



- LED Light source. Color temperature 5,300K +/- 270K
- Viewing area (125 x100 mm) is perfect for quick screening of 96-well plates, petri dishes, electrophoresis gels, slides, and transparencies
- Powered by six 1.5V AAA batteries (included), not included in warranty

Mini-Magnifier

- Swiveling molded lens 1.75x magnification
- Enlarges objects for easier viewing

Item No.	Description	L x W x H in	L x W x H cm
120661	Mini-Light Box*	6.2 x 5.9 x 0.6	15.8 x 15 x 1.4
HS15092D	Mini-Magnifier	6.3 x 5.3 x 8.1	16.1 x 13.5 x 20.7
			*Batteries included





Hand Tally Counter

-

Use for counting blood cells, bacterial colonies, drops of liquid or any repetitive event

- Tallies up to 9999 Lens for easy reading, and
 - Features a guick-reset knob finger ring for a secure grip

Item No.	Dia. x W in	Dia. x W cm	
HS6594	1.8 x 1.6	4.6 x 4.1	



Benchtop Counters

Mechanical, benchtop counters are perfect for blood cells (label included), bacterial colonies or repetitive counting

- Each key records up to 999Blood cell key labels
- Total window keeps track of total number of strokes made on all other keys; bell rings when total reaches 100

Item No.	No. of Keys	L x W x H in	L x W x H cm
HS5360A	6-Key	9.8 x 3 x 2.2	25 x 7.6 x 5.6
HS5360B	9-Key	12.5 x 3 x 2.2	32 x 7.6 x 5.6

Tel: (866) 433-6682

Workstation Essentials

Products necessary for workflow efficiency and keeping your work space clean and organized



Lab Mats Notebooks & Timers Drying Racks Organization

Tel: (866) 433-6682

www.novatech-usa.com

Curiosity drives us beyond yesterday's way of thinking:

We are an inquisitive bunch focused on understanding the lab science world and how to make a difference.

We change, we adapt and we expect creative thinking and solutions from everyone we align with.

We don't just make lab products, we make the work lab professionals do easier, more efficient and more fun.





Reusable Lab Mats

Sustainable, Safe Solutions

Reusable lab mats are an essential lab solution to help keep benchtops organized and clean

They help facilitate workflow processes and are ideal for every type of laboratory

Save Money & Eliminate Waste


 Since the lab mats are reusable, they reduce cost and waste making it a more environmentally friendly option over the alternative paper mats

Adds Stability & Safety

- These mats offer a large working surface that is anti-skid which keeps delicate glassware and expensive equipment in place
- The mat's surface is also noise dampening, reducing sound from the vibration of common benchtop equipment
- Made from durable food grade silicone, they are chemically resistance and have a raised edge to contain chemical spills

Easy to Clean & Store

 When the mats are done being used, they can be easily cleaned using any standard disinfectant by simply wiping it, or putting it in a dishwasher and it's ready for repeated use



www.novatech-usa.com

Workstation Lab Mat

Safely facilitate workflow processes

- Protect counter tops from hot items up to 200°C (392°F)
- Lip around the edge can hold approx. 250 mL of liquid
- Small footprint, 12 x 14.9 x 0.1 in (30.5 x 37.9 x 0.2 cm)







Gridded Surface for tube staging, preventing movement of objects Reversible Side One: combination gridded and smooth surface Side Two: smooth surface only



Item No.	Color	L x W x H in	L x W x H cm	
120747	Blue	12 x 14.9 x 0.1	30.5 x 37.9 x 0.2	
120748	Purple	12 x 14.9 X U.1		



Large working space

The lab mat can be used with items such as centrifuges, vortex mixers, hot plates, stirrers, pipettes and so much more

- Mat features designated magnetic area to keep stir bars in place
- Protect countertops from hot items up to 200°C (392°F)



Raised Edges enable liquid retention

of approximately ______ 300 mL of fluid Large Working Surface

accommodates benchtop equipment, weigh boats, stir bars, scales, etc.



Item No.	Side #1 Color	Side #2 Color	L x W x H in	L x W x H cm	
120506	Yellow	Grey/Blue			
120507	Purple	Purple/Grey	14 x 23.5 x 0.1	35 x 60 x 0.2	
120599	Blue	White/Blue			

Laboratory Notebooks

Keep information safe and well organized with Laboratory Notebooks

Record research data, experimental procedures, design and development ideas and more

- Quality Smyth Sewn binding holds pages securely and lies flat when opened
- Made of acid-free paper, pages are numbered and include space for title, date, project number, book number, date and witness signature
- User data, notebook instructions, table of contents, periodic table, and conversion tables are included in every book



Easy Identification with a foil stamped title

Keep Information Safe with a durable hardbound, water-resistant cover

Marker Ribbon to keep your place

Case of 12

Item No.	Color	Pages	Page Format.	L x W in	L x W cm	LABORATORY NOTEbook Gridded Notebook 2 Page Formats - Grid: 6 x 6 mm grid size
HS8610A HS8610B	Black Blue	100 200	Grid			Lined Notebook Gridded Notebook - Grid: 6 x 6 mm grid size - Lined: college-ruled pages
HS8610D		200	Lined	8.6 x 11.1	21.8 x 28.1	for easy report writing
HS8610E	Black	100	Lineu			



Twin Tip & Fine Tip Sharpie® Permanent Pens

Ink dries quickly and resists both fading and water

- Pen has a fine and an ultra fine tip and comes in a bright selection of colors
- Ink dries quickly and resists both fading and water
- AP certified

Item No.	Description	Color	
HS15094	Twin Tip Marker Set, Pack of 8	Assorted	
HS15092ZP	Fine Point Marker, Pack of 12	Black	

*Assorted colors (Black, Turquoise, Navy, Lime, Orange, Purple, Sky Blue, Berry) Sharpie[®] is a registered trademark of Sanford, A Newell Rubbermaid Company

Lab Alert[®] Clocks & Timers



Pocket Timer/ Stopwatch/Clock

- Four independent timing channels with visual and audible alarms
- Use as a stopwatch, a count up/down timer, or a clock
- Includes spring clip and magnetic back



Triple Timer/Clock

- Three channels to count up/down with
- Simultaneous display, time-out, and 60 second audible alarm
- Channels may be started independently or simultaneously
- Timer automatically counts up after counting down to zero
- Memory recall



4-way Timer with Whiteboard/Pen

- Clock feature count up or down to 24 hours 59 minutes
- 4 timer channels
- Stands up or attaches to a magnetic surface (magnets on back of unit)
- Whiteboard and marking pen included
- Sounds when time expires

	ltem No.	No. of Channels	Timing Capacity	Count Direction	Display Digits, H mm	Battery Included	L x W x H in	L x W x H cm
а	HS24490D	Four	100 hr.	Up/Down	6	One LR44 1.5V	2.4 x 2.8 x 1	6.1 x 7.1 x 2.5
b	HS24490M	Three	20 hr.	Up/Down	10.5	One AAA	3.4 x 2.6 x 0.9	8.6 x 6.6 x 2.2
С	120365	Four	24 hr.	Up/Down	10	Two AAA	4.8 x 3.4 x 0.9	12.3 x 8.6 x 2.1
d	HS24645	One	24 hr.	Up	8.5	One LR44 1.5V	3.4 x 3.1 x 0.8	8.7 x 7.8 x 2.1
е	HS24670	Four	99 hr.	Down	14	Two LR44 1.5V	2.9 x 2.3 x 0.5	7.3 x 5.9 x 1.3



- Quick start, quick stop timer features time, split, hourly chime, calendar, alarm
- 100 cm neck cord



e

Four Channel Timer/Clock

- Independently or simultaneously set time on four channels
- Audible and visual alarms signify elapsed time
- Easily toggle between channels and clock with top buttons
- Includes spring clip with magnetic back

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

Lab Drying Rack

Bringing color to a mundane task

Most Versatile Rack in the market


- Channels designed for more useful configurations
- Large and Small pegs for all glassware varieties
- One of a kind Drying Basket to collect smaller items

Designed to protect against breakage

- Peg angle allows for better hold especially large, heavy pieces
- Patent Pending SureGrip Hook securely grips glassware into place

Included:

- 72 Pegs ~ 36 Small (Green) ~ 36 Large (Blue)
- 2 Drying Baskets
- Drainage Tubing
- Mounting Hardware



Drying Basket to keep small items and slotted to hold pipets safe while drying



SureGrip Hook Patent-pending design securely grips glassware into place



Lab Drying Rack		U.S. Patent No. D923275, D936925, D951573, D951574
Item No.	L x W x H	L x W x H
	in	ст
120791	17.4 x 26 x 5.5	44.1 x 66 x 13.9

Replacement Parts

•	
Item No.	Description
120793	Peg 10 Piece Kit, (5) Small, (5) Large
120792	Drying Basket Kit, 2 ea
120813	Replacement Draining Set, Tube and Elbow

Wire Drying Rack

Saves glassware from chips and cracks

Drain and dry test tubes, beakers, flasks, and other labware

- Place self-standing rack on a table or near a sink, or use hooks to hang rack on the wall
- Holds up to 90 pieces of labware on 18 x 127 mm pins and 72 x 76 mm pins
- Constructed of spot-welded, HDPE-coated steel wire for durability with polystyrene tray and back
- Easily accessible and removable bottom drainage pan



Workstation Lab Mat

Keep glassware in place while drying

Peg Racks

Perfect for drying small items

Fiberglass-reinforced polypropylene racks are ideal for bench work or tube storage

- Use in sink or on countertop
- Sturdy pegs hold items in place





Workstation Lab Mat, Page 49



Pack of 2

Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
HS24311A	White	10	50	14–17	7.4 x 4.1 x 2.7	18.8 x 10.4 x 6.9
HS24311B	Blue	10	50	14-17	7.4 X 4.1 X 2.7	10.0 X 10.4 X 0.9
HS24312A	White	7	96	10–13	3.2 x 5 x 2.7	8.2 x 12.6 x 6.9
HS24312B	Blue	1	90	10-13	3.2 X 3 X 2.7	0.2 x 12.0 x 0.9

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

MagLab

Magnetic lab storage series

Easily organize common lab products off your bench top with the MagLab storage system

Vibrant & Functional

- Made of robust ABS plastic in bright translucent colors
- Secure direct to metal with built-in powerful magnets or non-metal surfaces with included self-adhesive mounting plate
- Available individually or as a pack of four

MagRack holds four 50 mL tubes and nine 15 mL tubes MagWipe holds a standard (110 x 210 mm) Kimwipes[®] box MagPette holds two pipettors (fits most popular styles) MagBox holds miscellaneous accessories



Magnetic Includes self-adhesive mounting plates that adhere to any surface

Item No.	Description	Color	L x W x H in	L x W x H cm
HS23500	MagLab Series, Pack of 4	Assorted 📃 🔳	 ■* —	—
HS23502	MagWipe	Green	5.1 x 3.5 x 3.8	13 x 9.1 x 9.8
HS23503	MagPette	Purple	5.1 x 4.4 x 2.9	13.1 x 11.2 x 7.6
HS23504	MagBox	Orange 📃	5.1 x 3 x 4	13 x 7.8 x 10.2

Kimmechannan Kimwipes

*Assorted colors: Teal, Green, Purple and Orange

Workspace Organization

Studies* show that by clearing clutter from your work environment, you are better able to focus and process information, resulting in increased productivity.

*Princeton University Neuroscience Institute

Tel: (866) 433-6682

Workstation Organizer

Keeps supplies organized and easily accessible

For easy access to items on counter, shelf or inside drawer

- Protect fragile items and contain small items

Item No.	Color	L x W x H in	L x W x H cm
HS2538A	White	17.9 x 12.1 x 2.5	45.5 x 30.7 x 6.3
Compartments		L x W in	L x W cm
2 Small Co	mpartments	17 x 3.1	43 x 8
1 Large Co	mpartment	17 x 4.3	43 x 11



Workstation Dispensing Bins

Clear acrylic bins let you see your small items inventory

- See inventory levels of pipette tips, tubes, fittings, finger cots, and other bulk small items at a glance
- Flip-top covers on generous openings make filling and dispensing easy and keep products dust-free
- 4 sizes available to cater to a wide variety of storage needs
- Includes non-skid rubber feet
- Item No. Color Compartments LxWxH LxWxH ст HS23401 1 7.2 x 7.6 x 9.1 18.4 x 19.4 x 23.2 HS23402 2 5.9 x 6.9 x 14.4 15 x 17.7 x 36.8 Clear 🗌 HS23403 3 8.5 x 6.6 x 8.5 21.7 x 17 x 21.7 HS23404 4 11.3 x 6.6 x 8.5 28.7 x 17 x 21.7

Tel: (866) 433-6682

Tubby[®] Storage Container Sturdy storage tub with lid and dividers

Our handy Tubby® stackable storage container is designed to help organize a laboratory

- The removable dividers can create as big or as small a compartment as needed
- Perfect for keeping tubes, tips, pipettes, gloves, and other small items organized and out of the way
- The lid snaps in place to secure the contents and for safe transport Pack of 5

		T don of o
Item No.	LxWxH	L x W x H
	in	ст
HS23453	13 x 7.9 x 4.5	33 x 20 x 11.5



More Dispensers for organization and to keep safety PPE products at the ready



Workstation Storage Bin, Page 155



Pipette Workstation, Page 83



Modular Glove Box Holders, Page 156

Test Tube Basket

Ideal for washing and storing test tubes

Strong basket for use with mechanical washers and autoclaves

- Basket for use in washers, autoclaves or for storage of lab consumables
- Made from aluminum _



Item No.	L x W x H in	L x W x H cm
HS20341B	10 x 6 x 6	25.6 x 15.2 x 15.2





High-quality glassware made from heavy-duty borosilicate glass and meets ASTM standards



Beakers Separatory Funnels Graduated Cylinders Volumetric Flasks

Tel: (866) 433-6682

www.novatech-usa.com

Glass Beakers

These low-form Griffin beakers feature easy-pour spouts and permanent white graduations

- Uniform wall thickness ideal for heating applications
- Made from high-quality borosilicate tubing with a low coefficient of expansion
- Graduation accuracy ±5% of full capacity

SIBATA Beakers

Item No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Approx. O.D. x H in	Approx. O.D. x H	Pack Qty.
10020-50A	50	20 to 50	10	1.8 x 2.4	46 x 60	10
10020-100A	100	20 to 100	10	2.2 x 2.8	55 x 70	10
10020-200A	200	50 to 200	25	2.6 x 3.5	67 x 89	10
10020-300A	300	50 to 300	50	3 x 4	78 x 103	10
10020-500A	500	100 to 500	50	3.5 x 4.3	90 x 120	10
10020-1000A	1000	200 to 1000	100	4.3 x 5.9	110 x 150	6
10020-2000	2000	250 to 2000	250	5.3 x 7.9	135 x 200	1
10020-3000	3000	500 to 3000	250	6 x 8.9	153 x 225	1

- Beakers are double-graduated metric

VEE GEE Beakers - Meet ASTM E-960 Type I Specifications for Classification, Design, Capacity & Dimensions and Markings

Item No.	Capacity (mL)		Graduation Interval (mL)	Approx. O.D. x H in	Approx. O.D. x H	Pack Qty.	Case Qty.
20229-20	20	5 to 15	5	1.7 x 1.8	32 x 45	12	48
20229-3000	3000	250 to 2500	125	5.9 x 8.3	149 x 212	1	6

Glass Burets

Used to accurately dispense a liquid, for example in a manual titration

- Designed "To Deliver"
- Made from high-quality borosilicate tubing with a low coefficient of expansion
- Feature durable, permanent markings; fine, sharp lines; and large easy-to-read numbers
- Supplied with PTFE stopcocks to eliminate freezing and lubricant contamination
- Meet ASTM E-287 Class A Specifications

SIBATA Burets

Item No.	Capacity (mL)	Graduation Interval (mL)	Tolerance (±mL)	Stopcock Bore (in/mL)	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Case Qty.
21310-10	10	0.05	0.02	0.2 / 4	0.4 x 20	9.1 x 570	1	20
21310-25	25	0.10	0.03	0.2 / 4	0.4 x 25.2	11 x 640	1	20
21310-50	50	0.10	0.05	0.2 / 4	0.5 x 33	12.6 x 840	1	25

VEE GEE Buret

Item No.		Graduation Interval (mL)			Approx. O.D. x H in	Approx. O.D. x H mm		Case Qty.
20114-100	100	0.20	0.10	0.08 / 2	0.7 x 30.5	17 x 775	1	24

Separatory Funnels


Feature smooth tooled tips, large white block letters, and large marking squares

- Supplied with PTFE stopcocks to eliminate freezing and lubricant contamination
- Made from high-quality borosilicate tubing with a low coefficient of expansion

SIBATA Separatory Funnels with Stopper - Squibb Style

Item No.	Capacity (mL)	Stopper No.	Stopcock Plug Size	Approx. O.D. x L in	Approx. O.D. x L mm	Approx. Total Length (in/mm)	Pack Qty.	Case Qty.
1426T-300	300	24 / 40	4	0.4 x 2.8	10 x 70	15.41 x 390	1	6
1426T-500	500	24 / 40	4	0.4 x 2.8	10 x 70	17 x 430	1	6
1426T-1000	1000	29 / 42	6	0.5 x 3.1	12 x 80	19.3 x 490	1	4
1426T-2000	2000	29 / 42	6	0.5 x 3.1	12 x 80	20 x 510	1	2

www.novatech-usa.com

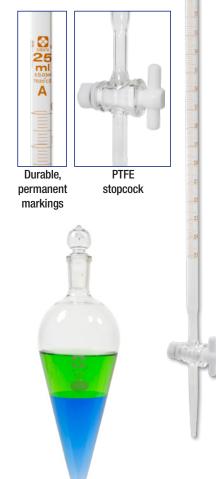

Tel: (866) 433-6682

VEE GEE Separatory Funnels with Stopper - Squibb Style

- All sizes supplied with a polyethylene standard taper stopper
- Meet ASTM E-1096 Type 4 Specifications for Classification, Design, and Markings

VEE GEE Separatory Funnels with Stopper - Squibb Style

Item No.	Capacity (mL)	Stopper No.	Stopcock Plug Size	Approx. O.D. x L in	Approx. O.D. x L mm	Approx. Total Length (in/mm)	Pack Qty.	Case Qty.
20149-250	250	22	2	0.4 x 2.6	10 x 65	13.6 x 345	1	24
20149-500	500	27	4	0.4 x 2.6	10 x 65	15.4 x 392	1	242

FILTRATION Filter Holders

Glass Microanalysis, 47 mm

SIBATA 6168-Series Filter Holders are offered with a wide variety of components for different applications. Available with fritted glass support base for general and biological applications, or with removable stainless steel screen support base and PTFE gasket for ultraclean filtrate or proteinaceous solutions. The borosilicate glass funnels are available in 100 and 300 mL.

Specifications

- Effective Filtration Area: 9.6 cm2 (filter dia. 47 mm, not included)
- Maximum Capacity: 100 mL Funnel: 150 mL; 300 mL Funnel: 350 mL -
- Graduated Volume: 100 mL Funnel: 100 mL; 300 mL Funnel: 300 mL
- Connection: Silicone Stopper (No. 8)
- Sterilization: Autoclavable, except PTFE Gasket (at 121°C / 250 °F for 20 minutes)

Filtration Kits

Cat No.	Kit Includes	
	6168-4711	Funnel, 300 mL
6168-0001	6168-4722	Fritted Glass Support Base
0100-0001	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-4711	Funnel, 300 mL
	6168-4721	Glass Support Base
6169 0000	6168-4731	Stainless Steel Screen
6168-0002	6168-4741	PTFE Gaskets (10 pk)
	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-47100	Funnel, 100 mL
6168-0003	6168-4722	Fritted Glass Support Base
0100-0003	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-47100	Funnel, 100 mL
	6168-472 1	Glass Support Base
6169 0004	6168-4731	Stainless Steel Screen
6168-0004	6168-4741	PTFE Gaskets (10 pk)
	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp



Funnel 100 mL

6168-47100

6168-4711 Funnel 300 mL

Tel: (866) 433-6682

6168-4762 Aluminum Anodized Clamp

6168-4731 Stainless Steel Screen

Steel

www.novatech-usa.com

PTFE Gaskets

(10 pk)

6168-4721 Glass Support Base

Silicone

Stopper No. 8

6168-4722 Fritted Glass Support Base

SIBATA Erlenmeyer Flasks

- Made from high-quality borosilicate tubing with a low coefficient of expansion
- Uniform wall thickness ideal for heating applications
- Graduation accuracy is $\pm 5\%$ of full capacity

SIBATA Erlenmeyer Flasks

Item No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Approx. O.D. x H in	Approx. 0.D. x H mm	Approx. O.D. of Neck (in /mm)	Rubber Stopper No.	Pack Qty.
10530-100A	50	20 to 50	10	2.5 x 4.1	64 x 105	0.9 / 22	2	10
10530-300A	300	20 to 100	25	3.4 x 6.1	87 x 156	1.3 / 34	6	10
10530-500A	500	50 to 200	50	4.1 x 7.1	105 x 180	1.3 / 34	6	10
10530-1000A	1000	50 to 300	50	5.2 x 8.7	131 x 220	1.7 / 42	8	10
10530-2000	2000	100 to 500	200	6.5 x 11	166 x 280	2.0 / 50	10	1



SIBATA Filtering Flasks

Constructed of heavy wall borosilicate glass to withstand high vacuum

- Used in conjunction with vacuum filter systems, these filtering flasks feature heavy-duty rims to reduce chipping

- Feature white permanent graduations and large marking square
- Port for tubulation has an outside diameter of 10 mm

SIBATA Filtering Flasks

Item No.	Capacity (mL)	Approx. O.D. x H in	Approx. O.D. x H mm	Rubber Stopper No.	Pack Qty.	Pack Qty.
1780T-300	300	3.4 x 5.5	86 x 140	8	1	12
1780T-500	500	4.1 x 6.7	105 x 170	8	1	12
1780T-1000	1000	5.2 x 8.7	131 x 220	8	1	8
1780T-2000	2000	6.5 x 10.6	166 x 270	8	1	4



20

30

40

SIBATA Class A Graduated Cylinders

Class A, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

- Graduated Cylinders feature hexagonal bases for added stability
- All sizes, except the 2000 mL size, come with a protective, polyethylene hexagonal bumper guard
- Constructed of borosilicate glass with durable white enamel markings
- Exceeds ASTM E-1272 Class A, Style I Specifications for Classifications and Tolerances

SIBATA Class A Graduated Cylinders

Item No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Tolerance (±mL)	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Case Qty.
2351A-5	5	0.5 to 5.0	0.1	0.05	0.5 x 5	12 x 126	4	48
2351A-10	10	0.7 to 10.0	0.1	0.05	0.5 x 7.2	13 x 182	4	48
2351A-20	20	1.0 to 20.0	0.2	0.05	0.6 x 7.9	16 x 200	4	48
2351A-25	25	1.4 to 25.0	0.2	0.15	0.7 x 8.3	17 x 210	4	48
2351A-50	50	3.5 to 50.0	0.5	0.25	0.9 x 8.6	24 x 218	4	48
2351A-100	100	5.0 to 100.0	1	0.40	1.2 x 9.3	30 x 236	4	48
2351A-250	250	10.0 to 250.0	2	1.00	1.6 x 11.9	41 x 301	4	24
2351A-500	500	25.0 to 500.0	5	2.00	2.1 x 14.3	53 x 362	2	12
2351A-1000	1000	50.0 to 1000.0	10	3.00	2.8 x 16.6	70 x 422	2	8
2351A-2000	2000	100.0 to 2000.0	20	6.00	3.5 x 18.9	90 x 478	1	6

SIBATA Class B Graduated Cylinders

Class B, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

- Graduated Cylinders feature hexagonal bases for added stability
- All sizes, except the 2000 mL size, come with a protective, polyethylene hexagonal bumper guard
- Constructed of borosilicate glass with durable white enamel markings
- Exceeds ASTM E-1272 Class B, Style I Specifications for Classifications and Tolerances

SIBATA Class B Graduated Cylinders

Item No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Tolerance (±mL)	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Case Qty.
2351-10	10	0.7 to 10.0	0.1	0.10	0.5 x 7.2	13 x 182	4	48
2351-25	25	1.4 to 25.0	0.2	0.30	0.7 x 8.3	17 x 210	4	48
2351-50	50	3.5 to 50.0	0.5	0.40	0.9 x 8.6	24 x 218	4	48
2351-100	100	5.0 to 100.0	1	0.60	1.2 x 9.3	30 x 236	4	48
2351-250	250	10.0 to 250.0	2	1.40	1.6 x 11.9	41 x 301	4	24
2351-500	500	25.0 to 500.0	5	2.60	2.1 x 14.3	53 x 362	2	12
2351-1000	1000	50.0 to 1000.0	10	5.00	2.8 x 16.6	70 x 422	2	8
2351-2000	2000	100.0 to 2000.0	20	10.00	3.5 x 18.8	90 x 478	1	6

SIBATA Student Graduated Cylinders

Plastic Base, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

- These economical graduated cylinders are made of two parts: a strong, borosilicate glass graduate and a detachable,
- sturdy plastic base which absorbs impacts and reduces breakage
- All cylinders come with a protective, polyethylene, hexagonal bumper guard
- All markings are in durable white enamel
- Exceeds ASTM E-1272 Class B, Style I Specifications for Classifications and Tolerances

SIBATA Student Graduated Cylinders

ltem No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Tolerance (±mL)	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Case Qty.
2355-10	10	0.4 to 10.0	0.1	0.10	0.5 x 7	13 x 177	6	24
2355-25	25	1.4 to 25.0	0.2	0.30	0.6 x 8.3	16 x 210	6	24
2355-50	50	2.0 to 50.0	1.0	0.40	0.9 x 8.3	24 x 212	6	24
2355-100	100	5.0 to 100.0	1.0	0.60	1.2 x 9.1	30 x 232	6	24

SIBATA Class A Volumetric Flasks with Snap-Cap

Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for snap-cap fit

- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Constructed of borosilicate glass with a low coefficient of expansion
- Graduation line is sharply defined and of uniform width
- Each flask has a large marking square and includes a polypropylene snap-cap
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA Class A Volumetric Flasks with Snap-Cap

ltem No.	Capacity (mL)	Tolerance (±mL)	Snap-Cap No.	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Pack Qty.
2303A-5	5	0.02	1	0.8 x 2.3	21 x 59	6	72
2303A-10	10	0.02	1	1 x 3.3	26 x 85	6	72
2303A-25	25	0.03	2	1.5 x 4.3	37 x 110	6	72
2303A-50	50	0.05	3	1.9 x 5.4	49 x 136	4	48
2303A-100	100	0.08	3	2.3 x 6.5	58 x 164	4	48
2303A-200	200	0.10	4	2.9 x 8.1	74 x 205	4	24
2303A-250	250	0.12	4	3.1 x 8.9	78 x 225	4	24
2303A-500	500	0.20	5	3.8 x 10.2	96 x 260	2	12
2303A-1000	1000	0.30	6	4.8 x 11.8	122 x 300	2	8

Snap-Cap for SIBATA Class A Volumetric Flask

ltem No.	Description	Fits Class A Volumetric Flask	Color	Each Qty.
SC#1	Snap Cap Size #1	2303A-5, 2303A-10	Yellow	1
SC#2	Snap Cap Size #2	2303A-25	Orange	1
SC#3	Snap Cap Size #3	2303A-50, 2303A-100	Red	1
SC#4	Snap Cap Size #4	2303A-200, 2303A-250	Green	1
SC#5	Snap Cap Size #5	2303A-500	Blue	1
SC#6	Snap Cap Size #6	2303A-1000	Yellow	1

SIBATA Class A Volumetric Flasks with Ground Glass Stopper

Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for standard taper glass stoppers

- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Constructed of borosilicate glass with a low coefficient of expansion
- Graduation line is sharply defined and of uniform width
- Each flask has a large marking square and includes a glass stopper
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA Class A Volumetric Flasks with Ground Glass Stopper

Item No.	Capacity (mL)	Tolerance (±mL)	Snap-Cap No.	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Pack Qty.
2306A-1	1	0.01	9	0.4 x 3.1	10 x 79	6	96
2306A-2	2	1.015	9	0.5 x 3.5	12 x 90	6	96
2306A-5	5	0.02	9	0.8 x 2.8	21 x 72	6	72
2306A-10	10	0.02	9	1 x 3.8	26 x 96	6	72
2306A-25	25	0.03	9	1.5 x 4.8	37 x 123	6	72
2306A-50	50	0.05	13	1.9 x 6	49 x 152	4	48
2306A-100	100	0.08	13	2.3 x 7.1	58 x 181	4	48
2306A-200	200	0.10	16	2.9 x 8.7	74 x 220	4	24
2306A-250	250	0.12	16	3.1 x 9.4	78 x 239	4	24
2306A-500	500	0.20	19	3.8 x 11	96 x 279	2	12
2306A-1000	1000	0.30	22	4.8 x 12.9	122 x 327	2	8
2306A-2000	2000	0.50	27	6.2 x 15.6	157 x 396	2	8







SIBATA Amber Class A Volumetric Flasks

Constructed of low-actinic amber glass, providing protection for materials that are sensitive to lig

- Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for standard taper glass stoppers
- Constructed of borosilicate glass with a low coefficient of expansion
- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Each flask has a large marking square and includes a glass stopper
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA Amber Class A Volumetric Flasks

Item No.	Capacity (mL)	Tolerance (±mL)	Snap-Cap No.	Approx. O.D. x H in	Approx. O.D. x H mm	Pack Qty.	Pack Qty.
2307A-10	10	0.02	9	1.1 x 3.7	28 x 95	6	72
2307A-20	20	0.03	9	1.4 x 4.5	36 x 115	6	72
2307A-25	25	0.03	9	1.5 x 4.8	39 x 122	6	72
2307A-50	50	0.05	13	1.9 x 5.9	49 x 150	4	48
2307A-100	100	0.08	13	2.4 x 7.1	60 x 180	4	48
2307A-200	200	0.10	16	3.0 x 8.7	75 x 220	4	24
2307A-250	250	0.12	16	3.1 x 9.4	78 x 239	4	24
2307A-500	500	0.15	19	3.9 x 11	100 x 280	2	12
2307A-1000	1000	0.30	22	5 x 12.8	127 x 325	2	8



SIBATA Glass Stoppers

Stoppers are lightweight yet very strong to reduce chipping and breakage

- Flat top design allows the stopper to stand on its head, freeing the user's hands
- Fully interchangeable with other common flask stoppers and fit all standard labware of comparable standard taper size
- Meet ASTM E-675 Specifications

SIBATA Glass Stoppers

ltem No.	Standard Taper Stopper No.	Tinting	Approx. Length of Ground Zone (in/mm)	Height Above of Ground Joint (in/mm)	Fit Volumetric Flasks	Pack Qty.
03081	9	Clear	0.6 / 14	0.4 / 10	2306A-1, -2, -5, -10, -25	6
03082	13	Clear	0.6 / 14	0.5 / 13	2306A-50, -100	6
03083	16	Clear	0.6 / 16.5	0.7 / 18	2306A-200, -250	6
03084	19	Clear	0.7 / 19	0.7 / 18	2306A-500	6
03085	22	Clear	0.8 / 20.5	0.8 / 20	2306A-1000	6
03087	27	Clear	0.7 / 21	0.8 / 21	2306A-2000	6



Sample Collection & Transport

Make everyday easier and safer with products for sample and blood collection



Portable Trays Totes & Transports Clinical Tube Racks Sample Trays & Racks

Tel: (866) 433-6682

www.novatech-usa.com

Sample Collection & Transport

Tray Inserts



Ratcheting Handle folds out of the way for easy access, even over tall sharps containers

> Side Pockets

come in two configurations and include an extra-deep compartment for a sharps container

65



Disposable Insert A for 13 mm tube rack



Disposable Insert B for 16 mm tube rack

D--1--64

Droplet Blood Collection Tray

Designed with phlebotomists in mind

Keeping a clean and organized tray has never been easier. Wash the ABS tray as needed, and replace the insert periodically for a fresh start

- Multiple compartments keep a variety of supplies neatly at hand, and organized
- Built in side pockets offer additional storage space
- Handle includes soft rubber grip to reduce hand and _ finger strain
- Each tray includes either a 13 or 16 mm Heathrow OneRack® tube rack (page 118) and two disposable polystyrene inserts

Droplet Configurations US Patent No. D5447								
Item No.	Tray Insert	Tube Rack	L x W x H in	L x W x H cm	Handle in	e Height cm		
HS2200A	HS2201A	13	— 16.8 x 10.4 x 6.7	42.9 x 26.5 x 17.2	11	28		
HS2200B	HS2201B	16	10.0 x 10.4 x 0.7	42.9 X 20.3 X 17.2	11	20		

Dreplet Incerte

Item No.DescriptionL x W inL x W cmHS2201ATray insert for 13 mm tube rack14.2 x 8.236 x 21HS2201BTray insert for 16 mm tube rack36 x 21	Droplet inserts						
14 2 x 8 2 36 x 21	Item No.	Description					
HS2201B Tray insert for 16 mm tube rack 30 x 21	HS2201A	Tray insert for 13 mm tube rack	14.0 , 0.0	26 y 01			
	HS2201B	Tray insert for 16 mm tube rack	14.2 X 0.2	30 X 21			



Keeps contents clean and secure

Droplet Lid

Supply Drawer

Cover for the Droplet blood collection tray

Protect the contents of the Droplet Tray with this Droplet lid. Custom designed sturdy lid is a snug fit, protects contents and provides access to the tray handle in its vertical position

- Made of polystyrene

- No rubber proteins, resins or fatty acids

- Can be secured with cable ties for extra security _ Stackable
- Item No. Color LXWXH LXWXH ст White HS2202 16.5 x 9.4 x 8 42 x 24 x 20.5



Hi-viz orange alert for safer practice

High-quality disposable tourniquets eliminate roping or curling when used

- Made from supple and smooth polyisoprene
- Latex free _
- Less abrasive than other brands _

Item No.	Color	Packaging	L x W in	L x W cm
120108	Green 📃	100/Bulk	18 x 1	45.7 x 2.5
120110	Orongo -	250/Bulk	10 \(1	4E 7 × 0 E
120111	— Orange 📕	25 Rolls	—— 18 x 1	45.7 x 2.5









to expedite loading and emptying



DuraPorter®

Specimen or Sample Transport Box

Ideal for transporting biological and clinical samples, as well as instruments and products that you want to keep clean and dry under testing environmental conditions

The Duraporter® transparent design is OSHA 29 CFR 1910.1031 and UN3373 compliant

- Polycarbonate construction and available in three colors for user/ owner identification
- Accommodates 13 mm, 16 mm and 20 mm tubes with our Half and Full Size OneRack®
- Use the separators provided to create your own compartment sizes



Item No.	Color	L x W x H in	L x W x H cm
120052	Clear with Blue Handle		
120077	Red with Red Handle	15 x 7.7 x 6.3	38 x 19.6 x 16
120078	Yellow with Yellow Handle		

Tel: (866) 433-6682

www.novatech-usa.com









Extra Security Feature Accommodates lockout tags (not included)

A Perfect Fit **OneRack®** Tube Rack Accommodates 13 mm, 16 mm and 20 mm tubes with our Half and Full Size OneRack® See page 118







For field sample processing, learn more about our Portable Centrifuge Kit

Includes Mini-Centrifuge and 12V Car Adapter for processing outside the laboratory



Portable Centrifuge Kit, Page 10

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

DuraPorter® XL

High-Capacity Sample Transport Tote

Your reliable solution for the safe and convenient transportation of laboratory samples, instruments, and valuable items. Crafted to meet the stringent demands of clinical and research laboratories, this oversized transport container ensures the protection and preservation of your cargo

Built to Last and Designed with the User in Mind

- Sturdy and spacious, ideal for transporting a large volume of samples
- Transparent design helps comply with OSHA 29 CFR 1910.1030 standards without having to re-label containers and enabling the user to visibly check sample integrity and meets UN3373 secondary packaging transport requirements
- Equipped with articulated handles featuring silicone grips for comfortable and secure handling



Emphasizing Security and Safety

- A silicone seal ensures a tight enclosure, safeguarding samples from most environmental elements
- Dual latches with security tag feature guarantee a secure closure, providing tamper-evidence and ensuring the integrity and authenticity of your samples

6.5

Exceptional Versatility

- Includes a MultiTube Rack Insert to accommodate various tube sizes. Additionally, two other insert options for blood tubes up to 10 mL and general research tubes up to 15 mL are available separately
- The bottom compartment is generously sized, allowing for carrying most tube racks, instruments or supplies according to your specific requirements



DuraPorter® XL

Includes One 120962 MultiTube Rack Insert

Item No.	Color	Dimensions (not including handle) in	Dimensions (not including handle) cm	UOM
120926	Blue	16 x 16.25 x 7	40.64 x 41.28 x 17.78	1 ea
120927	Red 📕	16 x 16.25 x 7	40.64 x 41.28 x 17.78	1 ea
120928	Yellow	16 x 16.25 x 7	40.64 x 41.28 x 17.78	1 ea

DuraPorter® XL

Tube Rack Inserts Accessories



120960 Duraporter[®] XL Large Tube Insert

Holds 100 tubes with diameter up to 18 mm Most 10 mL blood tubes & 15 mL conical tubes Array 10 x 10 Pack of 3



120961 Duraporter® XL Small Tube Insert

Holds 168 tubes with diameter up to 13 mm Most 3.5 - 7.5 mL blood tubes Array 12 x 14 Pack of 3

The second se

120962 Duraporter[®] XL MultiTube Rack Insert

Holds tube with various diameters: 13, 18 & 30 mm Most 15 mL & 50 mL conical tubes and 3.5 mL - 10 mL blood tubes Pack of 3

DuraPorter® XL Tube Rack Inserts

Item No.	Tubes	Cut-out Diameter	UOM
120960	15 mL, Large blood tube	18 mm	Pack of 3
120961	Small blood tubes	13 mm	Pack of 3
120962	50 mL, 15 mL, Small & Large blood tubes	30 mm (center), 18 mm (large), 13 mm (small)	Pack of 3

Tel: (866) 433-6682

www.novatech-usa.com

Blood Collection Tray

Light weight, heavy on organization

Organize your phlebotomy, I.V. start or catheter insertion supplies with this spacious, robust and easy to clean carry tray

- Lightweight easy-to-clean ABS construction
- Customize the compartments to suit your requirements with the dividers provided
- Comfort grip on durable acetal plastic handle tested to hold up to 10 kg -

Item No.	L x W x H in	L x W x H cm	Handle Height <i>in</i>	Handle Height <i>cm</i>
120261	16.4 x 12.2 x 3.3	41.9 x 31.1 x 8.5	9.4	24.1
Functional Comes with a 60-place, tub	a 17 mm well,	ioum in the second s		





Totemax® Blood Collection Tray

Keep off the floor, work top or bed

Unique phlebotomy tray design and patented hook feature allows the tray to be on or over most bed rails, foot-boards and handrails found in a typical patient room

- Made from food grade HDPE resins for a durable non-breakable design
- Deep tray design helps reduce spills





Clinical 4-Way Tube Rack

The only tube rack specifically designed to hold round, flat & conical blood collection and culture tubes

- Accommodates all brands of 13 and 17 mm round, flat and conical bottom blood collection & culture tubes
- Customize the rack to fit the number of wells required, infinite units can be linked together or use one standalone unit
- Molded alphanumeric identification for quick location and retrieval of tubes
- Robust, made from polypropylene that is chemical resistant and easy to clean
- Racks can be used in water baths and placed in freezers
- Patent Pending

Customizable

Racks can slide together to create many combinations



US Patent	No. D900	0337			Pack of 5	Ind	ividual R	ack Speci	fications	
item No.	Color		Item No.	Color		B	e Wells	Well Dia.	L x W x H in	L x W x H cm
120684	Blue		120687	Natural			12	13		
120685	Purple		120683	Assorted*		A	18	13	01,00,000	00 0 v 7 0 v 0 F
120686	Green					D	12	17	9.1 X 2.0 X 3.0	23.2 x 7.0 x 9.5
			*Ass	orted colors (Blue, Pu	rple, Green, Red, Natural)		18	17		

Tel: (866) 433-6682

www.novatech-usa.com


71

Mega Rack®

High-capacity storage for your tubes

Fully assembled, polypropylene mega racks are great for high throughput labs requiring large sample storage

- Sturdy, material for easy and secure transport of blood collection and other tubes
- Alphanumeric identification for quick location and retrieval of tubes
- Place different test groupings into one rack eliminating the need for multiple racks

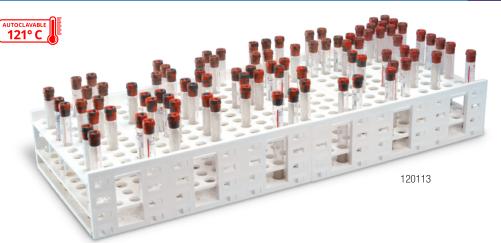

AUTOCLAVABLE

AUTOCLAVABLE

AUTOCLAVABLE

Mega Racks® 10-13 mm - Holds 5-7 mL sample tubes

Item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm	Material
HS24322A HS24322E	Blue White	— 216	13	13.3 x 9.3 x 3.6	33.7 x 23.5 x 9.1	PP
120112 120113	White Blue	- 432	13	26.5 x 9.3 x 3.5	67.3 x 23.5 x 9.0	РР

Mega Racks[®] 13-16 mm - Holds 10 mL sample tubes

J						· · ·
Item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm	Material
HS24323A	Blue 🗖	— 120	16	13.3 x 10.5 x 3.6	337 v 267 v 01	PP
HS24323E	White 🗌	120	10	13.3 × 10.3 × 3.0	33.7 X 20.7 X 9.1	ГГ
120114	White 🗌	- 240	16	26 5 x 10 5 x 2 5	67.3 x 26.7 x 9.0	PP
120115	Blue	240	10	20.3 × 10.3 × 3.3	07.3 X 20.7 X 9.0	ГГ

Mega Racks $^{\odot}$ 18-20 mm - Holds 15 mL conical/swab tubes and 20 mm round bottom tubes

Item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm	Material
120834	White	— 120	20	14.9 x 11.9 x 3.6	37.7 x 30.1 x 9.1	PP
120835	Blue					



HS24323A & HS24323E



Mega Racks[®] 28-32 mm - Holds 50 mL conical/swab tubes

Item No.	Color	Wells	Well Dia. mm	LxWxH in	L x W x H cm	Material
*120958	Blue	— 100	32	16.2 x 16.7 x 4.7	41.2 x 42.3 x 12	ABS
*120959	White					

*Not recommended for autoclaving

Tube Roller Racks

Efficient and practical solution for tube roller workflows

Expand capacity of your workflow

Each Tube Roller Rack accommodates 10 tubes, doubling or tripling the capacity of your tube roller equipment

- Saves Process Time

Large batch processing reduces the number of roller cycles required for lab procedures

- Saves Money

Handles more without the need to invest in multiple machines to process the same amount of tubes

- Saves Valuable Space Additional capacity especially helpful with limited incubator capacity



Fits most standard and larger size tube roller equipment models.

Versatile and Durable Solution

- Organize samples pre and post mixing
- Use as a storage tube rack for upright storage or submerse in an ice bath
- Polypropylene construction is wearresistant and offers reliable sterilization through autoclaving



Silicone rings for smooth rotation and gentle contact with roller

> Accommodates 10 tubes

Tubes snap securely into holders, ensuring a stable hold and aligning with the roller's rotational axis




Available in two sizes

- Large: Fits flat and conical bottom blood collection & culture tubes (10 mL) and standard 15mL tubes up to 18-20 mm
- Small: Fits flat and conical bottom blood collection & culture tubes 10 17 mm (3.5 7 mL)

ltem No.	Tube Size	Unit Diameter in (cm)	Holding Prongs Diameter (at rest) in (cm)	Unit Length in (cm)	UOM
120956	Large	2.54 in (6.5 cm)	0.59 ±0.01 in (1.5 ±0.02 cm)	11 in (27.9 cm)	Pack of 3
120957	Small	2.54 in (6.5 cm)	0.468 ±0.008 in (1.2 ±0.02 cm)	9.4 in (23.9 cm)	Pack of 3

Clinical Tube Racks

Learn about more of our Tube Racks that hold 10-17 mm blood collection tubes

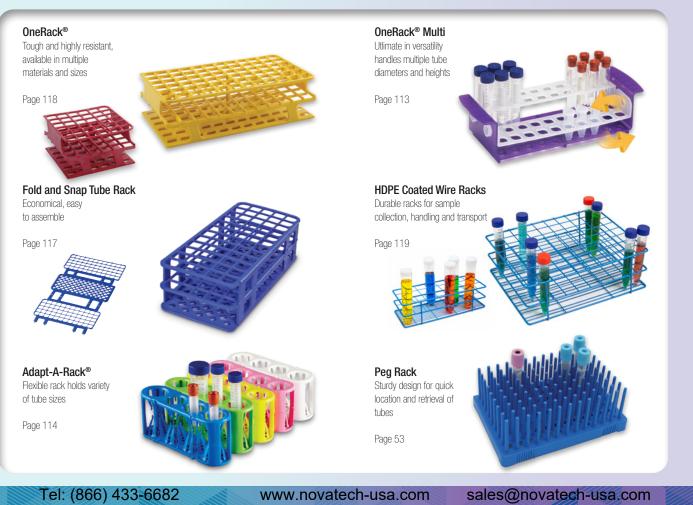



Droplet Corrugated Sample Storage Tray

Affordable sample organization and storage

Corrugated storage trays can be used with the included dividers for specimen containers or remove them for general lab product storage or transport

- Made from corrugated polypropylene -
 - Stackable with other trays
 - Moisture resistant, significantly reducing Pack includes: 10 trays and 10 dividers the chance of mold

item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm
120375	White	24	58	16 x 10.2 x 3.5	40.6 x 26 x 8.9



or transport of laboratory products



Lightweight and Sturdy to hold up to 24 full specimen containers

Droplet Sample Storage Tray

Sample organization for the busy lab

Hard wearing storage trays that can be used for specimen containers with the insert provided, or for general lab products without the insert

- Bin and tray are made from polystyrene
- Lightweight and sturdy to hold up to 24 full specimen containers (Specimen containers not included)
- Stackable with other trays to support as many as four high
- Can be easily cleaned with common disinfectants and germicides



Rem	ovab	le li	nsert

allows outer shell to be used for storage or transportation of laboratory products

Iten	n No.	Color	Wells	Well Dia.	L x W x H in	L x W x H cm
120	172	Blue/White	24	58	18.9 x 13 x 3.3	48 x 33.1 x 8.4



Tube Array

6 x 4

Wells

24

Coated Wire Rack - Urine Containers

Durable racks for transport or sample handling

- Chemically-resistant, HDPE-coated steel wire rack
- Fits bottles with 55-58 mm diameters

LxWxH

15.5 x 10.3 x 2

in



73

Tel: (866) 433-6682

Color

Blue

Item No.

120091

www.novatech-usa.com

Well Dia.

тт

58

sales@novatech-usa.com

LxWxH

39.3 x 26.2 x 5

ст

Liquid Sample Handling

Whether it be dispensing or aspirating microliters or milliliters, we offer you precision at your fingertips



Pipettors, Fillers & Bulbs Glass & Transfer Pipettes Reagent Reservoirs & Chillers Funnels & Lead Rings Pipette Racks & Accessories

Tel: (866) 433-6682


www.novatech-usa.com

High-quality Pipettors offering precision at your fingertips



Tel: (866) 433-6682

High-quality Pipettors offering precision at your fingertips

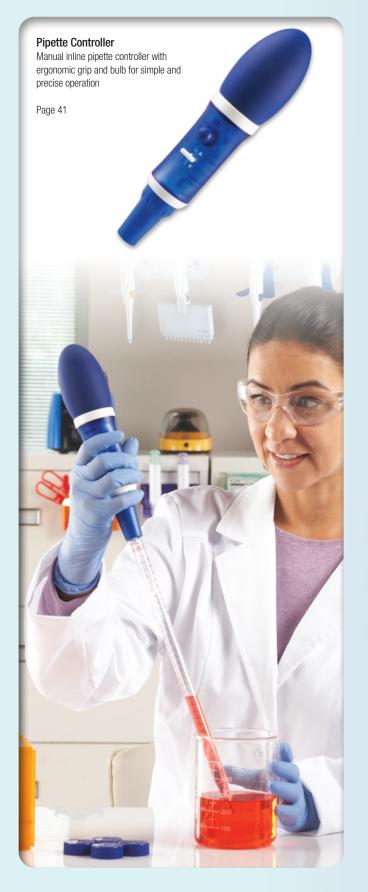

Pearl® Adjustable Volume Pipettes Complete range of singleand multi-channel pipette volumes to cover all your possible needs

Page 42





Tel: (866) 433-6682

77

Fillers and Bulbs

1 Latex Dropper Bulbs Designed for use with Pasteur pipettes, small

pipettes, and medicine droppers

Dropper Bulbs 2

- Designed for use with Pasteur pipettes, small pipettes, and medicine droppers

Rubber Bulbs 3

Contoured shape and heavy-wall neck increase grip for easier use with pipettes and syringes

Vacuum/Pressure Bulb

- Ideal for gas sampling or for pumping gas through apparatus
- Two rubber valves with PVC connections (tubing not supplied)

5 Safety Bulb Pipette Filler

- Features a white ABS attachment containing a silicone conical adapter that seals around pipettes without twisting
- Pipette does not contact hard plastic, which reduces the risk of cracking and chipping
- Elastic band for hanging on reagent bottle or wrist
- Filler fits standard size pipettes

6 **Pipette Filler**

- Efficient one-handed operation
- Control air-evacuation, liquid uptake, and liquid _ dispensing with three valves
- Pinch release-valve for smooth liquid flow
- Red pipette filler is safe for pipetting of caustics and _ does not contain carbon black and will not smudge

Pack of 72

Pack of 24

Pack of 3

Latex	Dropper	Bulbs	(Natural Rubber)
-			

Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter	Outer Diameter	Hole Diameter	Hole Diameter
HS20622A	— Yellow	1	1.7	43	0.51	13	0.20	5
HS20622B	- reliow	2	2.0	52	0.51	13	0.24	6

Dropper Vial Bulbs (Silicone Rubber)

Broppor than		1100001/						1 401 01 2
Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter	Outer Diameter	Hole Diameter	Hole Diameter
HS20629A	— Blue 🗖	1	1.1	28.7	0.47	12	0.24	6.0
HS20629B		3	1.6	41	0.70	17.8	0.26	6.5

Rubber Bulbs (Natural Rubber)

Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter	Outer Diameter	Hole Diameter	Hole Diameter
HS20630B		15	1.9	50	1.3	34	0.16	4
HS20630C	Ded -	30	2.6	66	1.8	46	0.24	6
HS20630D	— Red 📕	60	3.1	80	2.1	54	0.24	6
HS20630E		150	4.1	103	2.9	73	0.24	6

Vacuum/Pressure Bulb (Natural Rubber)

Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter	Outer Diameter	Hole Diameter in	Hole Diameter
HS20631B	Black	85	4.2	106	2.1	52	0.29	7.4

Safety Bulb Pipette Filler (Natural Rubber)

Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter in	Outer Diameter	Hole Diameter in	Hole Diameter
HS20623	Red	15	4.2	106	1.6	41	0.39	10

Pipette Filler (Natural Rubber)

Item No.	Color	Volume mL	Length in	Length mm	Outer Diameter	Outer Diameter	Hole Diameter	Hole Diameter
HS20632A	Black							
HS20632B	Red	35	5.1	130	2.1	54	0.24	7
HS20632C	Blue							

SIBATA Resuable Glass Pipets

Our SIBATA reusable glass pipets are meticulously manufactured for tolerances and accuracy.

Compared to plastic, reusable glass pipets are autoclavable and sustainable with less waste.

Glass is a superior material for measuring samples with a wide variety of chemical compounds.

These quality pipets offer markings and color coding that are permanently enameled to the glass.

Volumetric Pipets - To Deliver

Accurately transfer a specific volume of solution for which it is calibrated.

- Meet ASTM E-969 Class A Specifications and USP Standards for volumetric glassware

Item. No.	Capacity (mL)	Tolerance (±mL)	Approx. Length (in/mm)	Color Code	Pack Qty.	Case Qty.
2040A-05	0.5	0.005	11.8 / 300	2-Black	12	72
2040A-1	1.0	0.006	13.5 / 345	Blue	12	72
2040A-2	2.0	0.006	13.9 / 355	Orange	12	72
2040A-3	3.0	0.01	14.1 / 360	Black	12	72
2040A-4	4.0	0.01	14.3 / 365	2-Red	12	72
2040A-5	5.0	0.01	14.7 / 375	White	12	72
2040A-6	6.0	0.01	15.3 / 390	2-Orange	12	72
2040A-7	7.0	0.01	16.1 / 410	2-Green	12	72
2040A-8	8.0	0.02	16.9 / 430	Blue	12	72
2040A-10	10.0	0.02	17.3 / 440	Red	12	72
2040A-13	13.0	0.03	18.1 / 460	White	6	36
2040A-15	15.0	0.03	18.1 / 460	Green	6	36
2040A-20	20.0	0.03	18.7 / 475	Yellow	6	36
2040A-25	25.0	0.03	18.8 / 480	Blue	6	36
2040A-50	50.0	0.05	21.2 / 540	Red	6	36
2040A-100	100.0	0.08	23.6 / 600	Yellow	6	36

Volumetric Pipets - Wide-Tip Opening - To Deliver

Ideal for water treatment facilities, winemakers, tissue culture work and essential oil testing

- Meet ASTM E-969 Class B Specifications for tolerance
- Wide-tip opening facilitates rapid fill and drain of viscous liquids, slurries and suspensions

- No drawn tips on 1, 2 & 5 mL sizes. Standard drawn tips on 10 – 100 mL sizes

VOLUMETRIC PIPETS - WIDE-TIP OPENING

Item No.	Capacity (mL)	Tolerance (±mL)	Approx. Length (in/mm)	Approx. Tip I.D. (in/mm)	Pack Qty.	Case Qty.
2040-1-1.9MM	1.0	0.01	12.6 / 320	0.08 / 1.9	12	72
2040-2-2.4MM	2.0	0.01	13 / 330	0.09 / 2.4	12	72
2040-5-3MM	5.0	0.02	13.6 / 346	0.1 / 3	12	72
2040-10-3MM	10.0	0.02	17.3 / 440	0.1 / 3	12	72
2040-20-3MM	20.0	0.03	18.8 / 478	0.1 / 3	6	36
2040-25-3MM	25.0	0.03	18.7 / 475	0.1 / 3	6	36
2040-50-3MM	50.0	0.05	21.2 / 538	0.1 / 3	6	36
2040-100-3MM	100.0	0.10	23.8 / 605	0.1 / 3	6	36

25 ***

SIBATA

1/10 :0.03

HIGHINGHIN

10

10 mi8

Serological Pipets

Graduated with calibration marks for delivering variable volumes of solution as needed

Mohr Measuring Pipets - To Deliver, DRAIN OUT

- Meet ASTM E-1293 Style 1, Class A Specifications and USP Standards for volumetric glassware

MOHR MEASURING PIPETS

Item No.	Capacity (mL)	Tolerance (±mL)	Graduation Interval (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Color Code	Pack Qty.	Case Qty.
2010A-5	5.0	0.02	0.1	0.3 x 14.4	8 x 365	Blue	12	72
2010A-10	10.0	0.03	0.1	0.4 x 14.6	10 x 370	Orange	12	72
2010A-25	25.0	0.05	0.1	0.5 x 17.9	13 x 455	White	12	72

Serological Pipets - To Deliver, BLOW OUT

- Meet ASTM E-1044 Style 1, Class A Specifications

SEROLOGICAL PIPETS

Item No.	Capacity (mL)	Tolerance (±mL)	Graduation Interval (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Color Code	Pack Qty.	Case Qty.
2011A-01-C	0.1	0.0025	0.01	0.2 x 11.8	6 x 300	White	12	72
2011A-1-C	1.0	0.01	0.01	0.3 x 14.2	7 x 360	Yellow	12	72
2011A-2-D	2.0	0.01	0.1	0.3 x 14.2	7 x 360	Green	12	72
2011A-5	5.0	0.02	0.1	0.3 x 14.4	8 x 365	Blue	12	72
2011A-10	10.0	0.03	0.1	0.4 x 14.6	10 x 370	Orange	12	72
2011A-25	25.0	0.05	0.1	0.5 x 17.9	13 x 455	White	12	72

Serological Pipets-Wide-Tip Opening - To Deliver, BLOW OUT

Ideal for biochemical applications

SEROLOGICAL PIPETS - WIDE-TIP

Item. No.	Capacity (mL)	Tolerance (±mL)	Graduation Interval (mL)	Hole Diameter x Length (in)	Hole Diameter x Length (mm)	Color Code	Pack Qty.	Case Qty.
20200-11A	1.0	0.02	0.2	0.06 x 13.8	1.5 x 350	Red	12	72
20200-51A	5.0	0.1	0.5	0.08 x 13.8	2.0 x 350	Blue	12	72
20200-101A	10.0	0.2	0.5	0.1 x 13.8	3.0 x 350	Orange	12	72

SEROLOGICAL PIPETS - GRADUATED TO THE TIP

Item. No.	Capacity (mL)	Tolerance (±mL)	Graduation Interval (mL)	Hole Diameter x Length (in)	Hole Diameter x Length (mm)	Color Code	Pack Qty.	Case Qty.
20140-10A	10	0.05	0.1	0.05 x 14.4	1.4 x 366		12	72
20140-20A	20	0.1	0.1	0.06 x 17.1	1.5 x 435		12	72

10 1N (10 0.03

10 ml SIBATA

Transfer Pipettes

One-piece, unbreakable polyethylene plastic pipettes

Well-suited for blood banking, urinalysis, hematology, wet chemistry, microbiology, and serology

- Bulk packed versions come in handy dispenser box
- Sterile versions available single wrapped or 20 wrapped at a time
- Lot-to-lot traceability on sterile versions

	Item No.	Vol. mL	Working Vol. mL	Length mm	Graduations mL	Packaging 500 per box	Sterile
	HS206371A					Bulk	
а	HS206371B	5	1	150	0.25	20/bag	\checkmark
	HS206371C					1/single wrap	\checkmark
	HS206372A					Bulk	
b	HS206372B	5	2	155	0.5	20/bag	✓
	HS206372C					1/single wrap	\checkmark
	HS206373A					Bulk	
С	HS206373B	7	3	155	0.5	20/bag	\checkmark
	HS206373C					1/single wrap	\checkmark





Universal Carousel Pipette Stand


Pipettes never looked so good, on your bench top

Stylish pipette stand holds and stores up to 8-single channel, 4-multi channel, or a combination of both pipettes Versatile

- Patent pending design enables this stand to securely hold virtually every known brand of pipette in the marketplace
- Modular upper holder inserts accommodate the fit of different pipette widths
- Assorted color inserts allow for color coding configurations

Durable Utility

- Stable weighted base allows for easy one handed removal and replacement of pipettes
- Rotating head makes pipette selection fast and easy
- Moving the stand while keeping pipettes in place is simple with a quick grip handle allowing a user to grab and go



9 x 16.1

- Inserts

on the upper holders can be added or removed to accommodate the fit of different pipette widths

22.9 x 40.8

Item No.	Upper Holder Color		Quantity	Lower H Color	older	Quantity
120480	Blue/Green		8 ea/color	Blue		8 ea
120481	Purple/Clear		8 ea/color	Purple		8 ea
120499	Assorted/Clear*		1 ea/color	Clear		8 ea
			8 clear			
	*Assorted a	colors (Purple,	Blue, Green, G	rey, Red, Orang	e, Yello	w and Clear)
Base Width	Top W	хH	Base Widt	th To	pWx	Н

Tel: (866) 433-6682

www.novatech-usa.com

6.2

sales@novatech-usa.com

15.8

Universal Pipette Holder

Wall mounted storage solution


The pipette holder comes with two wall mounting brackets that each hold two pipettes

Secure

- Upper and lower segment inserts easily slide in place to securely hold virtually every known brand of pipette
- Segments unique design includes traction grips that center pipettes allowing for easy one handed removal and replacement

Adaptable

- Inserts come in two separate colors allowing for color coding, quick identification or just to add a pop of color to your workspace

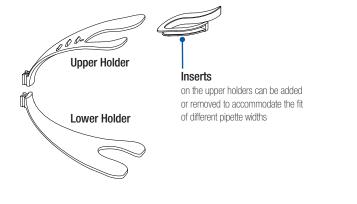

Item No.	Lower Holder	Upper Holder	L x H in	L x H cm
	2 Blue	2 Blue		
100575	_ 2 Green 🔳 2 Green 📕	2 Green 🔳	60,10	17 5 4 5
120575	2 Clear	1 Purple	———— 6.9 x 1.8	17.5 x 4.5
		1 Yellow		



Clamp-ette® Pipette Holder

Create an instant pipette holding point within your lab

Secures to tabletops, benches and shelves with a twist

 Chemical-resistant polypropylene and fits most major pipette brands




Tri Clamp-ette®

iii Giailip	In Gamp-ette-							
Item No.	Color		L x W x H in	L x W x H cm				
HS20162A	Blue		6.2 x 4.7 x 3.7	15.7 x 12 x 9.5				

Secures Clamping for tabletops, benches

and shelves

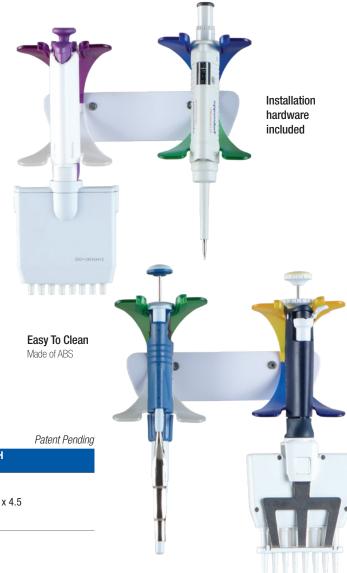



Flip & Grip[®] Pipette Holder Giving labs a choice

Unique pipette holder that gives you the option of using on the bench top or hanging under shelf to help maximize your working space

- Will hold up to 12 single-channel pipettes, or a combo of 3 single- and 3 multichannel pipettes - Holds most common brands
- Rubber grips prevent scratching pipette
- Weighted base
- Installation hardware included

				US Design Patent N	lo. D754,872 & D763,464	
Item No.	Color	Bench Top Style W x H in	Bench Top Style W x H cm	Under Shelf Style W x H in	Under Shelf Style W x H cm	
120026	Blue	— 13.1 x 7.6	33.2 x 19.3	7.4 x 7.6	18.7 x 19.3	
120056	Lime	- IS.I X /.0	33.2 X 19.3	1.4 X 1.0	10.7 X 19.5	

Tel: (866) 433-6682

www.novatech-usa.com



Pipette Workstation

Organize your pipettes and tips

Keep pipette and disposable tips together in one convenient stand

- Acrylic workstation is opaque on sides with clear front and bin lids for easy content identification
- Holds up to four pipettes on top shelf
- Dual bins hold multiple size tips
- Self-closing lid provides dust-free storage
- Oversized lip allows for easy access when wearing gloves

Item No.	Color	L x W x H in	L x W x H cm
HS234631	Clear	9.6 x 6.5 x 9.7	24.4 x 16.5 x 24.6



Pipette Tip Disposal Box

Quick flip of port cover makes tip ejection easy

Convenient for one-handed disposal of used pipette tips, eliminates any need to handle pipette tips used with hazardous fluids

- The 0.375 in (10 mm) thick acrylic provides protection from Beta radiation
- The large, hinged lid allows easy disposal of contents
- Use in conjunction with small biohazard disposal bags, if hazardous fluids are not acrylic friendly

Item No.	Lid Opening	L x W x H	L x W x H
	mm	in	cm
HS234634	30	6.1 x 6.7 x 8.1	15.4 x 17.1 x 20.6



Pipette Stands

Convenient and safe storage

3-, 4-, and 6-Place Pipette Stands are designed to hold most major pipette brands

- Acrylic stands are transparent/clear; ABS stands are solid opaque colors

Item No.	Color	Material	Pipette Capacity	Slot Upper in	Slot Upper mm	Slot Lower in	Slot Lower
HS206203			Three				
HS206204	Clear 🗌	Acrylic	Four	-	05	0.0	10
HS20620			Six	I	25	0.8	19
HS20613C	Blue	Acrylic	Six				
HS20613E	Blue	ABS	Six	1	25	0.8	20

Tel: (866) 433-6682

www.novatech-usa.com sales@novat

Cargo Pipette Rack

Meets the need of any lab

Racks securely lock together horizontally or vertically to desired configuration or can be used individually

Can be used on top of benchtop or conveniently hung on any metallic surface with strong magnets that are designed into the racks

- Angled shelves store 0.1 to 50 mL pipettes
- Protective lid encloses the unit to prevent dust build-up and provides additional shelf space

			Pack of 3
Item No.	Color	L x W x H in	L x W x H cm
HS20615M	Blue 🔳	11.9 x 3.9 x 5	30.1 x 10 x 12.8





Pipette Racks

Protects and organizes glass and plastic pipettes

Four angled-shelved compartments keep your 0.1 to 50 mL pipettes or cryo vial canes within easy reach while preventing damage and clutter

- Heavy-duty acrylic version provides crystal-clear viewing from any angle
- ABS versions have cut-out viewing window and come with two removable attachments that hold pipette bulbs, fillers, and pumps
- HS20612M magnetized ABS version has strong magnets on both sides and mounts securely to steel surfaces

Item No.	Color	Material	L x W x H in	L x W x H cm
HS20611	Clear	Acrylic		
HS20612	Blue	ABS		201 v 0 0 v 40 1
HS20613	Red	ABS	- 11.4 x 3.5 x 15.8	29.1 x 8.8 x 40.1
HS20612M	Blue	ABS (mounting magnets)	_	

Pipette Attachments ABS versions includes 2 removable pipette attachments

Liquid Weighing Pour Boats

Deep vessel with sturdy handle designed for convenient handling and pouring of liquids

- Flat bottom ensures stability and prevents tipping
- Notched pour spout design controls liquid pour
- Operating temperature range 0 to 40°C (104°F)
- solutions, alcohols and bases Recyclable, marked - Made from FDA food grade polystyrene in an ISO

_

- Available in 3 Sizes
 - 50mL 100mL 200 mL

Material biologically inert and resistant

to dilute and weak acids, aqueous

					Pack of 200
Item No.	Color	Size	Volume mL	L x W x H in	L x W x H cm
120890	White	Small	50	3.6 x 1.6 x 1.7	9.2 x 4.0 x 4.3
120891	White	Medium	100	4.2 x 3.5 x 1.9	10.7 x 9 x 4.8
120892	White	Large	200	5.8 x 4.6 x 2	14.8 x 11.7 x 5.1



Class 8 clean room

Ice-free, non-toxic way to extend working period and preserve integrity for temperature sensitive reagents

- Reagents are kept at less than 5°C (41°F) for approximately 1 hour
- Engineered custom fit design for Heathrow Scientific 50 or 100 mL reservoirs to ensure a maximum contact for longer uniform cooling
- Eliminates the risk of contamination from messy ice bath _
- Not for use with liquid nitrogen

Pack of 2

Item No.	Color	Volume mL	L x W x H in	L x W x H cm
120730	Purple			
120731	Blue	50	6.1 x 2.9 x 1.7	15.5 x 7.4 x 4.2
120732	Assorted*			
120733	Purple			
120734	Blue	100	6.2 x 9 x 1.7	15.7 x 9 x 4.2
120735	Assorted*			

*Assorted colors (Purple and Blue)

Stackable Saves storage and work space

> 50 mL **Reservoir Chiller**

Symmetrical cooler design Allows reagent reservoirs to be mounted in either direction

> 100 mL **Reservoir Chiller**

ст

12.5 x 5 x 3.7

4.9 x 2 x 1.5



HS20821A

basin on one side and 12 slotted 5 mL basins on the other side

- Angled wells guide pipette tips toward a center position to help avoid cross contamination and waste
- Individual 5 mL basin wells numerical imprinted to identify samples _
 - Cover included to prevent contamination

_

тL

5/50

Reagent Reservoirs

Reagent Reservoirs by Heathrow Scientific offer a fresh and modern design with enhanced features to streamline pipetting procedures

Superior durability with enhanced walls and crush-resistant "turrets" at the corners _

STERILE R

Easy handling with tabs to prevent stacked reservoirs from sticking together _

Sterile Versions

- -Manufactured and gamma irradiated in an ISO certified facility
- -Certified DNase, RNase and pyrogen free
- -Packaged individually in an easy open HDPE package
- -Traceability Certificate available upon request



Graduation Markings on the top edge and inner

walls allows measurements of liquid to be easily identified and reduces wastage of expensive reagents

Pour-off Spouts conveniently located on all four corners

enables easy spill-free pouring and reduces chance of dripping



Item No.	Volume mL	Graduation Marks	Material	Sterile	Packaging	Interior Dimensions L x W x H <i>in</i>	L x W x H cm
120637	5	5	Polystyrene	Yes	50/Single Bag	2.8 x 0.8 x 0.7	7.2 x 2.1 x 1.8
120638	10	5 and 10	Polystyrene	No	100/Bulk	2.8 x 0.8 x 0.7	7.2 x 2.1 x 1.8
120639	10	5 and 10	Polystyrene	Yes	100/Single Bag	2.0 X U.O X U./	1.2 X 2.1 X 1.0
120640	25	15 and 25	Polystyrene	Yes	200/40 x 5pk		
120641	25	15 and 25	Polystyrene	Yes	100/Single Bag	4.4 x 0.9 x 1.1	11.3 x 2.4 x 2.7
120642	25	15 and 25	Polystyrene	No	100/Bulk	4.4 X 0.9 X 1.1	11.3 X Z.4 X Z.7
120844	25	15 and 25	Polystyrene	Yes	100/Single Bag		
120643	50	25 and 50	Polystyrene	Yes	200/40 x 5pk		
120644	50	25 and 50	Polystyrene	Yes	100/Single Bag		
120645	50	25 and 50	Polystyrene	No	100/Bulk	4.5 x 1.1 x 1.4	11.5 x 2.9 x 3.5
120646	50	25 and 50	PVC	Yes	100/20 x 5pk		
120690	50	25 and 50	PVC	No	100/Bulk		
120647	100	50 and 100	Polystyrene	Yes	200/40 x 5pk		
120648	100	50 and 100	Polystyrene	Yes	100/Single Bag	46 × 10 × 10	11 7 4 0 4 0 5
120649	100	50 and 100	Polystyrene	No	100/Bulk	4.6 x 1.9 x 1.0	11.7 x 4.8 x 2.5
120650	100	50 and 100	PVC	No	100/Bulk		
120651	25 (10 and 15 mL divided)	7/10	Polystyrene	Yes	200/40 x 5pk	4 x 1 x 0.8	10.2 x 2.5 x 2.1
120652	25 (10 and 15 mL divided)	10/15	Polystyrene	Yes	100/Single Bag	4 X I X U.O	10.2 X 2.3 X 2.1

www.novatech-usa.com

LevGo[®] Eco smartFunnel[™] Paper Funnel



A clean transfer every time

- Use with virtually any liquid or powder (not recommended for hot liquids)
- Often used to collect sputum samples
- Environmentally friendly paper product that will naturally biodegrade in the standard municipal waste stream
- Made of $\ensuremath{\mathsf{FSC}}\xspace^{\ensuremath{\texttt{BSC}}\xspace}$ Certified, FDA food grade, clay coated heavy grade paper
- Innovative "backrest" allows hands-free use when pouring viscous liquids
- Maximum flexibility cut stem to any desired opening size or shape
- Apply a minimum of pressure and the funnel will stay in position



Item No.	Size	Capacity mL	H x Inlet x Stem in/mm
120219	Mini	155	5 x 21/4 x 2 x 1/4 in² / 127 x 57 mm² x 64 mm²
120863	Micro	25	2 1/8 x 1 1/16 in² x 1/4 in² / 67 x 27 mm² x 64 mm²

Lead Rings

Stabilize vessels and labware on the bench or in water baths

- Vinyl-coated lead rings will not mark or scratch benchtops and labware
- C-shape format allows some manual size variation for a customized fit



Item No.	Shape	Color	Flask Sizes mL	ID in	ID cm	OD in	OD cm	Weight g
HS8881A	С	Diuo 🗖	125-500	1.9	4.2	3	7.5	215
HS8882A	0	Blue 🗖	125-500	1.9	4.8	3	7.7	210
HS8881B	С	Blue	250-1000	2	5.1	3.5	9	465
HS8882B	0	Diue	200-1000	2	5.1	3.5	9	490
HS8881C	С		500-2000	2.1	5.4	3.9	9.8	595
HS8882C	0	Blue 🗖	500-2000	2.2	5.7	3.9	9.8	610
HS8881D	С		1000-4000	2.6	6.6	4.4	11.3	890
HS8882D	0	Blue 🗖	1000-4000	2.8	7	4.5	11.5	935

*Weights may vary by +/- 3%

Safety Bottle Carriers

Secure and convenient bottle transport

- Ergonomic handle prevents hand fatigue and related accidents when carrying heavier loads
- Handle swings down to either side for easier loading and unloading
- Centering ring stabilizes bottle in the center of carrier for safer, steadier transport
- Carriers come in four colors with designated labeling areas for easy identification
- Made of chemical resistant thermoplastic elastomer PP blend





Item No.	Color	Dimensions (Dia. x H) in	Dimensions (Dia. x H) cm
120911	Red		
120912	Black	7.2 x 10.5	18.3 x 26.7
120913	Blue	(16 in height, handle extended)	(40.6 cm height, handle extended)
120914	Green		

Available in 4 Colors for easy identification and organization

Movable Handle swings down to allow clear access to vessel

item no.	GOIOF	in	cm
120915	Red		
120916	Black	4.5 x 6.5	11.4 x 16.5
120917	Blue	(10 in height, handle extended)	(25.4 cm height, handle extended)
120918	Green		

Sample Handling

Complete range of products and tools for gathering, weighing, and working with various types of samples



Pill Counting Trays Weigh Boats, Dishes, Papers Sampling Scoops Utensils: Spatulas, Forceps, Cell Spreaders, Loops & Picks

Tel: (866) 433-6682

www.novatech-usa.com

Pill Counting Trays

Counting trays that offer safety and

convenience when counting pills and capsules


Intended for single use to prevent cross-contamination for batch sampling or distribution of pills and capsules

Safety

- Disposable to ensure no chemical cross-contamination for patient safety
- Made from FDA food grade polystyrene in an ISO Class 8 clean room
- Meets quality control and GMP requirements for manufacturing batch sampling _
- Durable and shatterproof trays constructed of inert, BSE/TSE free material -
- Lot traceable

Convenience

- Pour spout in corner for dispensing control
- Ergonomic spatula (length 6.9 in/17.6 cm)
- Available in both, sterile* and non-sterile for intended usage -





For round pills

For capsules from size 2 to 00

Item No.	Description	L X W X H in	L x W x H cm	UOM
120845	Pill Counting Tray Rectangular Sterile	10.3 x 5.2 x 0.5	26.2 x 13.1 x 1.2	Pack of 10 Case 40; 4 x 10/Single Bag
120846	Pill Counting Tray Rectangular Non-Sterile	10.3 x 5.2 x 0.5	26.2 x 13.1 x 1.2	Pack of 10 Case 40; 4 x 10/Bulk
120847	Pill Counting Tray Triangular Sterile	9.1 x 9.1 x 0.5	23.0 x 23.0 x 1.3	Pack of 10 Case 30; 3 x 10/Single Bag
120848	Pill Counting Tray Triangular Non-Sterile	9.1 x 9.1 x 0.5	23.0 x 23.0 x 1.3	Pack of 10 Case 30; 3 x 10/Bulk

Aluminum Weighing Boats & Dishes

Dishes for general-purpose weighing, dispensing, storage, food processing, evaporating or drying

Aluminum Weighing Boats

 Sturdy yet lightweight boats feature a smooth, flat bottom for sample handling



Oil Free Aluminum Weighing Boats

NEW

Passed through a rigorous, three-step cleansing process to remove forming oil or residue for more reliable weighing and moisture sample analysis.

- Lot traceable







Aluminum Weighing Boats

ltem No.	Volume mL	Dimensions in	Dimensions mm	Packaging	Tab	Oil Free	Wall Finish
120937	140 mL	4.1 x 0.8	103 x 20	100			Smooth
120937FR	140 mL	4.1 x 0.8	103 x 20	100		Х	Smooth
120936	80 mL	2.9 x 0.7	73 x 18	100			Smooth
120936FR	80 mL	2.9 x 0.7	73 x 18	100		Х	Smooth
120930	70 mL	2.8 x 0.7	71 x 17	100			Crinkle
120930FR	70 mL	2.8 x 0.7	71 x 17	100		Х	Crinkle
HS14521C	50 mL	2.8 x 0.6	70 x 16	100	х		Crinkle
HEA14521CFR	50 mL	2.8 x 0.6	70 x 16	100	х	Х	Crinkle
120935	42 mL	2.2 x 0.6	57 x 16	100			Smooth
120935FR	42 mL	2.2 x 0.6	57 x 16	100		Х	Smooth
HS14521B	34 mL	2.2 x 0.6	57 x 14	100	х		Crinkle
HEA14521BFR	34 mL	2.2 x 0.6	57 x 14	100	х	Х	Crinkle
120931	25 mL	2 x 0.5	52 x 13	100			Crinkle
120931FR	25 mL	2 x 0.5	52 x 13	100		Х	Crinkle
HS14521A	20 mL	1.7 x 0.5	43 x 12	100	Х		Crinkle
HEA14521AFR	20 mL	1.7 x 0.5	43 x 12	100	х	Х	Crinkle
120932	5 mL	1.1 x 0.4	28 x 10	100	х		Crinkle
120932FR	5 mL	1.1 x 0.4	28 x 10	100	х	х	Crinkle

NEW

Aluminum Weighing Dish

 Designed for moisture determination balances with slightly tapered walls for stacking



Passed through a rigorous, three-step cleansing process to remove forming oil or residue for more reliable weighing and moisture sample analysis. - Lot traceable







Aluminum Weighing Dish

	Jung Dion					
Item No.	Volume mL	Dimensions in	Dimensions mm	Packaging	Tab	0il Free
120938	45 mL	3.5 x 0.3	90 x 7	50		
120938FR	45 mL	3.5 x 0.3	90 x 7	50		Х
HS14522	40 mL	4 x 0.3	101 x 8	50		
HEA14522FR	40 mL	4 x 0.3	101 x 8	50		Х
120934	15 mL	2.7 x 0.2	70 x 6	50		
120934FR	15 mL	2.7 x 0.2	70 x 6	50		Х
120933	1 mL	0.98 x 0.3	25 x 7	50		
120933FR	1 mL	0.98 x 0.3	25 x 7	50		Х
120940	0.25 mL	0.5 x 0.1	13 x 3.5	100	Х	
120940FR	0.25 mL	0.5 x 0.1	13 x 3.5	100	х	Х

LevGo[®] smartPans[®]

Ideal for microbalances, organic micro elementary and thermal analysis, and pharmaceutical use

- Made of Ultra High Vacuum (UVH) Foil "A" wettable and completely free from oils normally found on other grades of aluminum foil
- Foil meets ASTM B-479, specification 3.1.4 and 10.3.1
- _ "Cahn style" accessory pans are compatible with most commercially available analyzers and microbalances



Item No.	Dia. x H in	Dia.xH mm	UOM
120627	1 x 0.1	25 x 3.6	20/Pk
120866	1 x 0.1	25 x 3.6	100/Pk

LevGo[®] smartStand[®]



Multifunction Aluminum Support Rack

The LevGo smartStand[®] reduces the inconveniences associated with weighing paper by providing much needed structural support when manipulating precious samples. No more creased paper suddenly flopping closed. No more samples trapped in weighing paper that is pinched closed too tightly. No more sample spilling during transfer. With the smartStand your sample is easily moved from bench to scale to beaker.

The unique LevGo smartStand is also a universal rack for the lab. Bend it to your needs! Prop up your strip of micro tubes, support your spatula on the bench, or keep your 1.5 ml tube from disappearing in the ice. Squeeze, stretch, bend and mold the smartStand to customize it to your specific needs.

- Stabilizes weighing paper
- Holds tubes, spatulas and more
- Made of UVH Foil
- Recyclable
- Made in the USA

				Pack of 75
	Item No.	W x H in	W x H cm	
1	120867	2.75 x 1.75 x 2	7 x 4.4 x 5	



Tel: (866) 433-6682

www.novatech-usa.com

sales@novatech-usa.com



Weighing Papers

recovery

material

Smooth surface for good sample



D--1---

	Pack of 500
LxH	LxH
in	ст
3 x 3	7.6 x 7.6
4 x 4	10.2 x 10.2
6 x 6	15.2 x 15.2
	in 3 x 3 4 x 4



Weighing Boats

Flexible polystyrene boats feature smooth surfaces to provide accurate pour-outs with minimal sample loss

- Select white, black, or blue for best color contrast to ensure sample is completely removed
- Biologically inert and resistant to dilute and weak acids, aqueous solutions, alcohols, and bases
- Temperature range -10 to 70°C (14 to 158°F)
- Antistatic versions available making the boats nonreactive with most substances and suitable for weighing staticaffected samples
- Wide flat bottoms ensure stability and prevent tipping
- Rounded corners allow simple flexing for controlled pouring of liquid, powdered or granular samples
- Can be used with microwave moisture analyzers
- Made from FDA food grade polystyrene

Manufactured and packaged in a clea<u>n</u>

room



Standard Weighing Boats

Sterile Weighing Boats

Ideal for applications where there is concern of cross contamination and 'clean' is a necessity in life science research, food, biopharmaceutical, environmental and molecular research environments

- Electron beam sterilized
- Lot number traceability for quality assurance
- Certificate of Irradiation available upon request





Square Weighing Boats

Hexagonal Weighing Boats



Diamond Weighing Boats

Pour-boat Weighing Dishes



Flat bottom ensures stability and prevents tipping

- Notched pour spout design controls liquid pour

- Available in 3 Sizes
 - 50 mL
 - 100 mL
 - 200 mL



sales@novatech-usa.com

Liquid Pour Boats, Page 85

Weigh Boats Shape	Regular	Antistatic	Color	 Size	Volume	LxWxH	Pack of 50 L x W x H
	Material Item No.	Material Item No.			mL	in	ст
	HS1420A	HS1420AA	White				
	HS1421A	120222	Blue	Small	10	1.8 x 1.8 x .3	4.6 x 4.6 x .8
	HS1423A	HS1423AA	Black				
	HS1420B	HS1420BB	White				8.5 x 8.5 x 2.4
Standard	HS1421B	120223	Blue	Medium	85	3.4 x 3.4 x .9	
	HS1423B	HS1423BB	Black				
	HS1420C	HS1420CC	White				
	HS1421C	120224	Blue	Large	280	5.5 x 5.5 x .9	14 x 14 x 2.2
	HS1423C	HS1423CC	Black				
	_	HS14251A		Small	6	1.5 x 1 x .4	3.8 x 2.5 x .9
lovogonol	_	HS14251B	— White	Medium	46	2.5 x 2 x .7	6.4 x 5.1 x 1.9
lexagonal	_	HS14251C	- white	Large	194	4 x 3 x .9	10.2 x 7.6 x 2.2
	—	HS14251D		X-Large	364	5 x 3.5 x 1.2	12.7 x 8.9 x 3.1
	HS1419A	120225		Small	14	1.7 x 2.3 x .5	4.3 x 5.8 x 1.3
our-boat	HS1419B	120226	White	Medium	137	3.3 x 5.2 x 1	8.3 x 13.2 x 2.6
	HS1419C	120227		Large	259	4.3 x 7.2 x 1	10.8 x 18.3 x 2.6
Square	HS1422	—	White	Medium	51	3.5 x 3.5 x .3	9 x 9 x .7
	HS1424AA	HS1425AA	White	— Small	5	2.1 x 1.3 x .2	5.3 x 3.3 x .6
	HS1427AA	HS1426AA	Black		5	2.1 X 1.3 X .Z	0.3 X 3.3 X .0
	HS1424A	HS1425A	White		25	2.6 x 1.9 x .6	6.7 x 4.7 x 1.4
)iamond	HS1427A	HS1426A	Black	medium	25	2.0 X 1.9 X .0	0.7 X 4.7 X 1.4
namonu	HS1424B	HS1425B	White	Lorgo	30	3.1 x 2.2 x .6	7.8 x 5.6 x 1.4
	HS1427B	HS1426B	Black	– Large	30	J.I X Z.Z X .0	7.0 X 3.0 X 1.4
	HS1424C	HS1425C	White	— X-Large	100	4.5 x 3.3 x 0.7	115 x 85 x 17
	HS1427C	HS1426C	Black	X-Large	100	4.5 X 5.5 X 0.7	113 X 03 X 17
terile Weigh E	loats						Pack of 200/40 x 5p
ihape	Regular Material Item No.	Antistatic Material Item No.	Color	Size	Volume mL	L x W x H in	L x W x H cm
Standard	_	120880	White	Small	10	1.8 x 1.8 x .3	4.6 x 4.6 x .8
tandard	—	120710	White	Medium	85	3.4 x 3.4 x .9	8.5 x 8.5 x 2.4
lexagonal	_	120881	White	Small	6	1.5 x 1 x .4	3.8 x 2.5 x .9
lexagonal	_	120882	White	 Medium	46	2.5 x 2 x .7	6.4 x 5.1 x 1.9

Micro Weighing Boats

Ideal for microbalance weighing and/or distribution of very small amounts of sampling material

Easy to Handle

- Large tabs make boats easy to use, position and hold, especially with forceps

Superb Sample Recovery

- Inert material enables the boat and contents to be added to solutions to aid 100% sample recovery, where protocols allow
- Anti-static properties prevent sample retention from static electricity
- Small surface area reduces liquid sample evaporation


Micro Weigh Boats

Item No.	Color	Dimensions in	Dimensions mm	UOM
120836	White	.98 x 0.4 x 0.3	25 x 8.9 x 7.5	250/pk



Made of Polystyrene Food Grade Compliant





Ideal for very small volume pipette calibration and checks and micro sampling





Functional in the Lab

Available in a small and medium in both brown for light colored samples and white for dark samples

LevGo[®] smartBoats[®]

A truly green solution to sample weighing

Made from FSC[®] Certified (FSC[®] Mix Credit) paper (Eco-IN) and when disposed of in the standard waste stream they will naturally biodegrade (Eco-OUT)

- A cost-effective solution to reduce plastics in the lab
- Made of grease-proof paper that meets FDA 21 CFR 176.170 (components of paper in contact with aqueous and fatty foods) and with 2I CFR 176.180 (contact with dry foods)
- Control contents like a polystyrene weigh boat because they are easier to pour
- An alternative to regular weighing papers because they are easier to handle

Item No.	Color	Size	Packaging	L x W x H in	L x W x H cm
120312	Brown	- Small	Pack of 500	1.4 x 1.4 x 0.6	3.5 x 3.5 x 16
120314	White	Siliali	FACK OF JUU	1.4 X 1.4 X 0.0	3.3 × 3.3 × 10
120313	Brown	Modium	Pack of 500	1.9 x 1.9 x 0.6	4.8 x 4.8 x 14
120315	White		Pack of 500	1.9 X 1.9 X 0.0	4.0 X 4.0 X 14
120626	Brown	Lorgo	Dook of 050	2042041	0 5 4 0 5 4 0 5
120195	White	- Large	Pack of 250	3.8 x 3.8 x 1	9.5 x 9.5 x 2.5

smartBoats™ is a trademark of LevGo Inc.



Forceps

Corrugated handles and serrated tips

- ABS plastic

* Forceps shown at actual size Pack of 6								
Item No.	Color	Length in	Length cm	Тір				
HS15998C	Blue	4.4	11.1	Straight				



HS15906

HS15907

HS15909 **Spatulas** Overall Length cm Item No. End Type End L x W End L x W Overall Length in Finish in тт Transfer, lift, and handle powders and granular Flat 1.2 30 materials HS15906 6 15 Glazed 0.5 x 0.2 Spoon 12 x 4 - Made from nickel-plated, stainless steel wire Round Flat 2 x 0.3 50 x 8 HS15907 7.7 19.5 Mirror - Glazed spatula HS15906 has a Hayman-type end **Tapered Flat** 1.8 x 0.3 45 x 6.5 Flat 2 50 HS15909 8.9 22.5 Mirror 121° C Spoon 1.5 x 0.6 38 x 15

www.novatech-usa.com

Sample Handling

95

Lab tools that scoop, stir and scrape. LevGo[®] smartSpatula[®] Designed to fit perfectly with standard 0.2, 0.5, 1.5/2.0, 15 and 50 mL tubes - Made of virgin, food-grade polypropylene a Ideal for dispensing or sample collection of powders or soft solids _ Will not shatter when used with liquid nitrogen frozen samples _ Hollow core minimizes heat transfer—good for hot and cold liquids b - Antistatic, sterile and Eco-Friendly versions available - Complies with FDA standards for food contact C STERILE EO 121° Always there d and always clean! e

	ltem No.	Description	Color	Suggested Tube mL	Packaging	L x W in	L x W cm	Spoon (Flare) in	Spoon (Flare)	Scoop/Pick L x W in	Scoop/Pick L x W mm	Taper
a ·	120005	Micro Antistatic	Opaque	0.2 and 0.5	300/Bulk	5.5 x .2	14 x .4	—	—	4.3	11 (V-Tip)	15°
b .	120008	Eco-Friendly	Opaque	15 and 1.5	300/Bulk	5.5 x .3	14 x .7	9.8 x 5.5	25 x 14	11.8 x 1.2	30 x 3	
c .	120003	Standard	Blue		300/Bulk	-			8 x 5.5 25 x 14	11 0 v 1 0	20 × 2	
	120004	Standard	Opaque	15 and 15	300/Bulk		01 7	01 y 7 0 0 y E E				
d .	120007	Std. EtO Sterile	Opaque	15 810 1.5	15 and 1.5 100/10 x 10pk	– 8.3 x .3	21 x .7	9.8 x 5.5	20 X 14	11.8 x 1.2	30 x 3	
	120625	Std. Et0 Sterile*	Opaque		100/10 x 10pk	_						
e ·	120006	Macro	Green	50	150/Bulk	12.2 x .4	31 x 1	16.5 x 9.3	42 x 23.5	11.8	30	35°

*Non Toxic/Non Pyrogenic smartSpatula™ is a trademark of LevGo Inc.

Dual Purpose Scoops

Just scoop to retrieve, place on scale to weigh

Unique economical solution that combines the function of a scoop and a weigh boat into one, streamlining the process

- Made from anti-static polystyrene that is waterproof and reduces the chance of materials sticking to the scoop
- Ships and stores flat, easy to assemble for use
- Locking tab feature enables a scoop shape to help retain materials
- Coated to stand up to powders, gels, and semi-solids







Sampling Scoops

Our line of durable Sampling Scoops designed for easy sample retrieval of granules, powders and pastes

Available in multiple sizes and intended for single use to prevent contamination of bulk sample material

Durable Design

- Large, wide openings for easy sample retrieval
- Flat bottom to stabilize sample on scale or flat surface
- Lot traceable
- Shatterproof constructed of inert, BSE/TSE free material

Safe Sample Recovery

- Disposable to ensure no chemical cross-contamination
- Made from FDA food grade polystyrene in an ISO 8 Class clean room
- Meets quality control and GMP requirements for sampling
- Available in both, sterile* and non-sterile for intended usage
- *Electron beam sterilized and individually wrapped

Certificate of Irradiation available upon request







Small Sampling Scoop

Item No.	Description	Volume	L x W x H in	L x W x H mm	Sterile	UOM
120858	Small Sampling Scoop Non-Sterile	60 mL/2 oz.	8.1 x 1.6 x 1.1	205 x 40 x 27		Pack of 10, Case 200; 20 x 10/Bulk
120857	Small Sampling Scoop Sterile	60 mL/2 oz.	8.1 x 1.6 x 1.1	205 x 40 x 27	\checkmark	Pack of 10, Case 200; 20 x 10/Single Bag





Medium Sampling Scoop											
Item No.	Description	Volume	L x W x H	L x W x H	Sterile	UOM					
120856	Medium Sampling Scoop Non-Sterile	125 mL/4 oz.	<i>m</i> 8.6 x 1.9 x 1.3	<i>mm</i> 218 x 49 x 38		Pack of 10, Case 200; 20 x 10/Bulk					
120855	Medium Sampling Scoop Sterile	125 mL/4 oz.	8.6 x 1.9 x 1.3	218 x 49 x 38	\checkmark	Pack of 10, Case 200; 20 x 10/Single Bag					





Large Sampling Scoop

Item No.	Description	Volume	L x W x H in	L x W x H mm	Sterile	UOM
120854	Large Sampling Scoop Non-Sterile	250 mL/8 oz.	7.7 x 2.3 x 1.7	195 x 58 x 44		Pack of 10, Case 200; 20 x 10/Bulk
120853	Large Sampling Scoop Sterile	250 mL/8 oz.	7.7 x 2.3 x 1.7	195 x 58 x 44	\checkmark	Pack of 10, Case 200; 20 x 10/Single Bag



XLarge Sampling Scoop

Item No.	Description	Volume	L x W x H in	L x W x H mm	Sterile	UOM
120852	XLarge Sampling Scoop Non-Sterile	500 mL/16 oz.	10.0 x 3.6 x 2.1	255 x 92 x 53		Pack of 10, Case 200; 20 x 10/Bulk
120851	XLarge Sampling Scoop Sterile	500 mL/16 oz.	10.0 x 3.6 x 2.1	255 x 92 x 53	\checkmark	Pack of 10, Case 200; 20 x 10/Single Bag

LevGo[®] smartPicks[™] Inoculation Picks

The 'smart' way to isolate individual colonies

Available in three lengths and two needle sizes to suit a wide range of application needs

- Naturally biodegradable, made from 100% U.S.A. grown white birch wood
- Manufactured in an FDA-registered factory and complies with FDA standards for food contact
- Available in semi or needle point styles for delicate operations



121° C

Mini Sized SmartPicks fit neatly into a 1.5 mL microfuge tube allowing the lid to be closed for full sample transfer/recovery

Drop it in & Close it up!



Item No.	Size	Point	Tip	Suggested Tube	Packaging	Length in	Length cm
120010	Mini	Needle Point		Fits 1.5 tube (closed)	2,000	1.3	3.3
120011	Standard	Semi Point	Single Tip		1,600	2.5	6.4
120012	Standard	Needle Point	Single Tip		1,000	2.5	6.4

smartPicks[®] is a trademark of LevGo Inc.


Inoculating Needle/Loops

Combination provides choice to spread or pick colonies and cultures

Transfer bacterial cultures without risk of contamination

- Use loop end to uniformly streak a gel surface
- Use needle end for removal of colonies
- Choose between flexible polypropylene or the more rigid ABS versions
- Lot-to-lot traceability



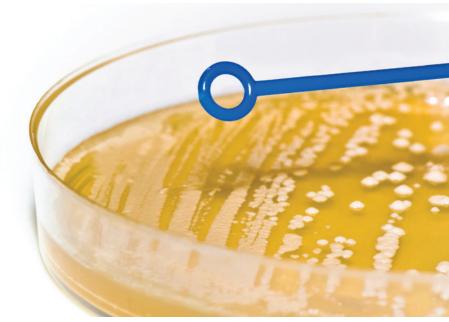

Item No.	Color	Material	Loop μL	L x D in	L x D cm	Packaging 1,000 per Box	Sterile
HS81121A		Flexible PP	4	7.9 x .2	20 x .4	50 x 20pk	/
HS81121B	Blue	Rigid ABS	I	7.9 X .Z	20 X .4	30 X 20pk	v
HS81121C	Dhua 🔳	Flexible PP	10	7.9 x .2	20 x .4	50 x 20pk	/
HS81121D	Blue	Rigid ABS	10	7.9 X .2	20 X .4	50 X 20µk	•
	Tel: (866) 43	33-6682	www.nova	atech-usa.com	sales@	novatech-usa.c	om



Item No.	Shape	L x W x H in	L x W x H cm	Packaging	Sterile
HS8151	Delta™	6.8 x 1.5 x .2	17.2 x 3.7 x .4	500/Single Wrap	\checkmark
HS8171A		5.7 x 1.5 x .2	14.6 x 3.8 x .4	500/Single Wrap	\checkmark
HS8171B	L-Shape	J.7 X 1.5 X .Z	14.0 X 3.0 X .4	500, 50 x 10 Pack	\checkmark
HS86655	Stainless Steel	8 x 1.3 x .2	20.3 x 3.3 x .4	1/Single Wrap	

Petri Dish Dispenser

- Sturdy acrylic holds up to 30 x 100 mm dishes in two easy-access partitions
- Set on counter or wall mount with included hardware





sales@novatech-usa.com

Need help counting cells?

For accurate cell counts, check out our Digital and Manual cell counting solutions



Tel: (866) 433-6682

www.novatech-usa.com

Tubes & Vials

Reliable sample storage



Micro & Conical Centrifuge Tubes Screw-top Tubes Cryogenic Vials

Tel: (866) 433-6682

www.novatech-usa.com

Micro & Conical Centrifuge Tubes

Available in natural and pure black for light sensitive samples

Microcentrifuge Tubes: 0.2, 0.5 and 1.5 mL (a-d)

- Attached flat caps for easy one-handed use
- 0.2 mL is suitable for thermal cyclers
- 0.5 and 1.5 mL versions have a frosted writing area and a syringe pierceable cap
- 100% polypropylene



Certified DNase. **RNase & Pyrogen Free** (a, b, c only)



Microcentrifuge Tubes

	Item No.	Color	Vol.	Outer Dimension	Closed Height	Graduations	Max RCF	Packaging
			mL	тт	mm	mL	Rating	
а	HS4423	Natural	0.2	6.9	22.2	None	15,000 x g	1,000/Bulk
b	HS4422	Natural	0.5	10.1	31.7	0.1, 0.3, 0.5	15,000 x g	1,000/Bulk
С	HS4323	Natural	1.5	10.8	39.0	0.1, 0.5, 1	16,400 x g	500/Bulk
С	HS4325	Natural	1.5	10.8	39.0	0.1, 0.5, 1	16,400 x g	1,000/Bulk
d	HS4323K	Black	1.5	10.2	40.6	0.1, 0.5, 1, 1.5	18,000 x g	500/Bulk

Conical Centrifuge Tubes: 15 and 50 mL (e-i)

- Lot-to-lot traceability with easy tear packaging
- Writing area and flat polyethylene lids for easy labelling
- Imprinted graduations and a self-standing version (only in clear bulk pack)
- Recyclable chipboard used for the racked versions, making ther riendly



Certified DNase, RNase & Pyrogen Free (f & h)

Item No.	Color	Vol. mL	Outer Dimension	Closed Height mm	Graduations mL	Max RCF Rating	Packaging 500 per Case
HS4426B	Natural	15	17	120	0.5	11,000 x g	Bulk/10 x 50pk
HS4426R	Natural	15	17	120	0.5	11,000 x g	Rack/10 x 50pk
HS4428	Black	15	17	120	0.5	9,400 x g	Bulk/10 x 50pk
HS4427B	Natural	50	29	114	5.0	9,500 x g	Bulk/20 x 25pk
HS4427R	Natural	50	29	114	5.0	9,500 x g	Rack/20 x 25pk
HS4429	Black	50	29	114	5.0	9,400 x g	Bulk/20 x 25pk
HS4427S	Natural	50	29 - skirted	114	5.0	9,500 x g	Bulk/20 x 25pk

Conical Centrifuge Tubes

е

f

g

h

i

Screw-top Tubes with O-ring Cap

Safer long-term storage

- Screw-on polypropylene lids with TPE O-ring (white) -
- Clear polypropylene tubes provide excellent view of samples _
- Skirted, self-standing base makes filling and retrieval easy _
- Non-sterile _



Frosted writing area

TPE 0-ring to create an excellent seal for secure storage



sales@novatech-usa.com

Item No.	Color	Vol. mL	Outer Dimensions	Closed Height	Graduations mL	Max RCF Rating	Packaging	
HS10060	Natural	2.0	13.3	47.1	0.5, 1, 1.5	18,000 x g	500/Bulk	

Item No. Color	Vol. Pack	aging	Outer Dim. mm	Grad. mL	Closed Heig mm	ght		
					Patent No. D595	<i>,</i>		
 polypropylene Silicone lid seal & patented lid with ergonomic graduat Recommendation graduat gra	writing area and ions nended for ical freezers and nase LN ₂ (-196°)		Writing Area & Graduation	ns		e, non-pyrogenia	Die Sterility C e c, non-cytotoxic, E	e vials
Innovative design saves space i	n your freezer	-					1.8	F
Cryogenic Vials			easy-grip facete	d lid			No. of Lot of Lo	

Item No.	Color		Vol. mL	Packaging	Outer Dim. mm	Grad. mL	Closed Height
HS23202A	Assorted	*	2.0	500/50 x 10pk	12	12	49
HS23202N	Natural			500/50 X TUPK			49

*Assorted colors: Blue, Red, Green, Purple, Grey

Cryogenic & Vaccine Vial Grippers Slender Cryo Gripper Design **The Perfect Grip for Optimal Precision** These two styles of hand-operated Grippers are designed to pick up cryogenic and crimped 10R-size vaccine/serum vials, respectively. Both are durably made of reinforced polypropylene which **Ridged Vaccine** is cold-tolerant and resistant to everyday wear. The Gripper Head designated squeeze target ensures maximum precision and grip with every use. Each style is available in a pack of 5 assorted colors for easy identification and organization. A combo pack with one Available in 5 colors of each style is also available. for easy identification & organization LOW TEMP -80° C 121° PK 5 / CS 100 LxWxH LxWxH Item No. **Gripper Type** Color cm 120908 Cryogenic Assorted* 5.6 x 0.6 x 0.9 14.3 x 1.5 x 2.3 120909 Vaccine Assorted* 🔳 🔳 🔳 📕 6 x 0.8 x 1.4 15.2 x 2 x 3.5 Assorted colors: red, blue green, purple, yellow. Marked thumb Perfect fit area for optimal PK 2 / CS 200 crimped 10R vial LxWxH LxWxH ergonomics and Item No. Color **Gripper Type** gripper head control in ст Perfect fit 6 x 0.8 x 1.4 (Vaccine) 15.2 x 2 x 3.5 (Vaccine) cryogenic vial 120910 Combination Blue 🔳 5.6 x 0.6 x 0.9 (Cryo) 14.3 x 1.5 x 2.3 (Cryo) gripper head Tel: (866) 433-6682

www.novatech-usa.com

Tube Racks & Storage

Classic, adaptable, interlocking racks and everything in between



PCR & Microtube Adaptable & Multi-Tube Classic Single Racks

Tel: (866) 433-6682

www.novatech-usa.com

We like to push boundaries

We make new and better ways of lab work possible by supplying everyday lab-ware and equipment that solve problems, improves productivity, and saves space.



We strive to create versatile, adaptable and multi-functional products that deliver value.



With a spectrum of colors and modern styles, our products stimulate the mind.



32 Place PCR Rack

Designed for pre- and post-PCR sampling, streamline your PCR workflow with the 32-Place PCR Rack. This versatile rack accommodates 0.2 mL tubes both individually and in strips of 8, as well as 32-place assay plates (8x4)

Space Saving Design

- Small and compact design is stackable, saving valuable space in the freezer
- Right sized when processing smaller batches
- Lid hinge design allows lid to sit at 180 degrees, clear of sample processing, or can be removed entirely

Reusable Convenience

- Transparent lid protects samples and allows for quick assessment of contents
- Embossed numbers and letters on the wells provide easy identification and tracking of samples
- Light-weighted construction made durable for reusability

				Pack of 10
Item No.	Tubes mL	No of Wells	L x W x H in	L x W x H cm
120889	0.2	32	3.8 x 6.9 x 1.2	9.8 x 17.5 x 3.1
Made from 10	00% recyclab	le Polypropylene	Stores down to -	80°C

Made from 100% recyclable Polypropylene


PCR Tube Racks 96-Well

Perfect for pre- or post-PCR sampling


- Made of polypropylene
- Accommodates individual tubes or strips
- Removable hinged lid lies flat
- Alphanumeric identification for quick location and retrieval of tubes Pack of 5

Item No.	Color		Item No.	Color	
HS23461A	Assorted*		HS23461C	Blue	
HS23461B	Natural		HS23461D	Green	
		*Assorted col	ors (Blue, Green, Pink,	Yellow, Orand	ge)

Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
0.2	96	5.2	5 x 3.9 x 1.2	12.7 x 9.9 x 3.0

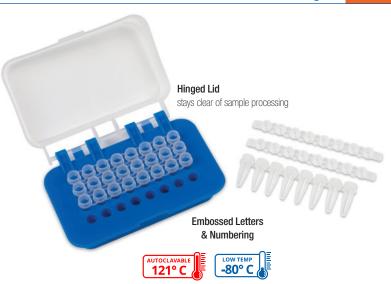



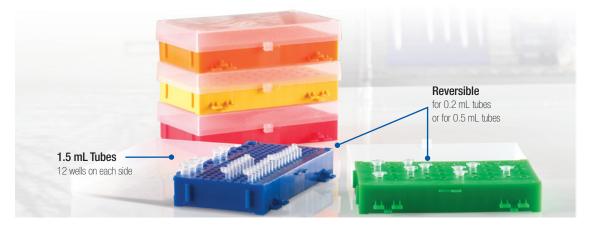

121° C

PCR Tube Racks Reversible

Removable hinged lid fits both sides

- Made of polypropylene
- PCR side of the rack holds 8 or 12 x 0.2 mL tube strips or individual tubes
- Reverse side holds 0.5 mL tubes
- Both sides of the rack have 12 wells for 1.5 mL tubes

Tel: (866) 433-6682

AUTOCLAVABLE						Pack of 5
	Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in (cm)
			0.2	168	5.5	— 8.1 x 5.2 x 2.1
S	HS2344A	1A	0.5	40	7.6	— (20.6 x 13.1 x 5.3)
			1.5/2.0	12	11.4	(20.0 x 13.1 x 3.3)

*Assorted colors (Blue, Green, Pink, Yellow, Orange)

PCR Cooler, 96-Well

Ice-Free Cooling System for PCR Preparation and Storage

Cools industry standard format PCR tubes, strips and single format as well as most standard and low profile 96-Well plates

Consistent & Reliable

- Modern design cools faster in freezers and stays cold longer on the bench top
- Maintains the entire 96-Well plate at a temperature of 0 °C for over an hour
- Maintains sample temperature of less than 5°C for up to three hours (with lid off)
- When the temperature ceiling of 6°C has been exceeded, users are signaled by a contrasting color change of the cooler or a single well



Alphanumeric Well Identification

for quick location and retrieval of tubes



Vented Lid

WARM TO COLD Lid doubles as a stand enables the rack to stay cold longer as there is no conductive heat transfer from surface beneath



enables faster cooling of samples while in freezer



US Patent Panding, Community Design No: 00/101756, 0001, 0002 Pack of 2

Ergonomic Textured Finger Grips


provide a secure hold, reducing the chance of dropping the PCR rack, and makes handling and transportation easy, especially when using gloves

Two Color Contrasting Options Available

purple to pink or dark blue to light blue allowing easy monitoring of samples

				us i alenii i enuiny,	Community Design No. 0041	101730-0001-0002 Tuck 012
Item No.	Warm Color	Cold Color	Wells	Tube Sizes mL	L x W x H in	L x W x H cm
120727	Pink 📕	Purple		0.2		
120728	Light Blue 📃	Dark Blue 📃	96		4.3 x 5.8 x 1.9	11 x 14.8 x 4.8
120729	Assorted*			Assay Plates		

*Assorted colors (Light Blue/Dark Blue & Pink/Purple

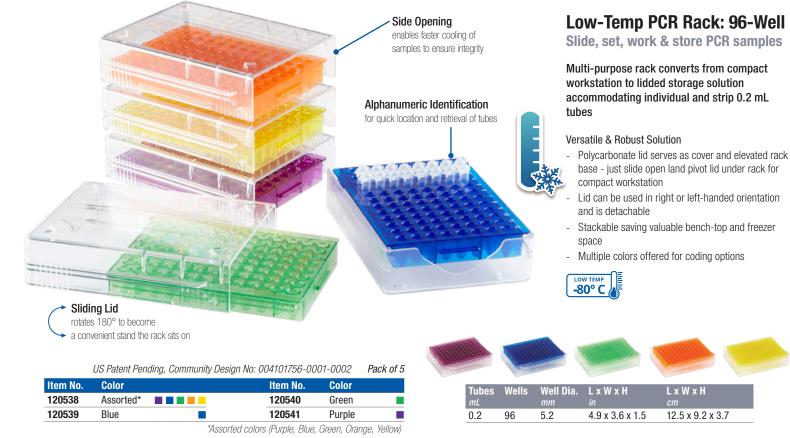

Tel: (866) 433-6682

www.novatech-usa.com

Tube Racks & Storage 107

Molded Grid Lines

0.5 mL wells separated by molded-in grid lines, making them easier to see

- - - -



Tabs on each end of rack snap lid into place

Raised Rings

around the 1.5 to 2.0 mL wells make tubes easier to remove



Reversible Tube Racks 96-Well

Easy-to-grasp tabs for sample handling and storage


96 wells for 0.5 mL tubes on one side and 96 wells for 1.5/2.0 mL tubes on the reverse side

Optimum Function & Identification

- Wells arranged in standard 8 x 12 array
- Molded in-grid lines separate 0.5 mL wells making them easier to see
- Raised rings around the 1.5 mL/2.0 mL wells make tubes easier to remove
- Alphanumeric identification for quick location and retrieval of tubes

Secure lid

- Translucent lid snaps onto rack tabs for secure, visible storage
- Spacious enough to fit most screw-top micro-centrifuge tubes
- Stackable, saving valuable space

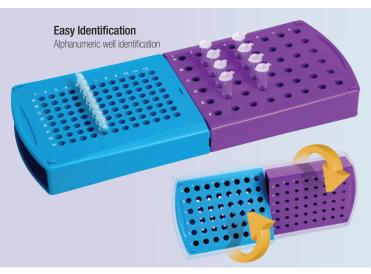

Two Tier Microtube Rack 20-Well

Interlock multiple racks to increase tube storage

Improved Experience

- Tiered rack allows for improved staging and visibility for easier, more accurate sample filling and retrieval
- Made of easy to clean polypropylene
- Easily remove tubes using finger slot on front of the rack

2.0

- Embossed Index Numbers for guick sample ID and retrieval

	\frown	-
AUTOCLAVABLE		2
4040.0		-
121°C /	5	-
	رر	

	~					Pack of 6
Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
		1.0				
HS4284A	Blue	1.5	20	10	8.3 x 3.5 x 2	21.1 x 9 x 5

AUTOCLAVABLE

	-		Pack of 5
Item No.	Color	Item No.	Color
HS2345A	Assorted*	HS2345D	Green
HS2345B	Natural	HS2345E	Pink 📕
HS2345C	Blue	HS2345F	Yellow
		*Assorted colors (Blue, Green,	Yellow, Orange, Pink)

Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
1.5/2.0	- 96	11	9.6 x 4.7 x 2	24.4 x 12 x 5.1
0.5	90	7.6	9.0 X 4.7 X Z	24.4 X 12 X 3.1


Rota-Rack[®] Duo Tube Rack

Dilution and concentration studies made easy

Transfer solutions between 0.2 mL PCR $\,$ tubes and 0.5 and 1.5 mL microcentrifuge tubes $\,$

- Purple section holds 48 x 0.5 mL and 48 x 1.5/2.0 mL microcentrifuge tubes on the reverse side
- Blue section holds 96 x 0.2 mL tubes and 48 x 1.5/2.0 mL tubes on the reverse side

121° C							
Item No.	Color		Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
	Blue/	_	0.2	96	5		
HS29041A	Purple	2	0.5	48	8	11.6 x 4.6 x 1.3	29.6 x 11.8 x 3.4
	rupie		1.5/2.0	96	11		

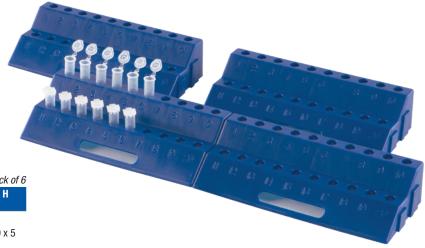

Tel: (866) 433-6682

Microtube Racks 80-Well

Popular fraction-collector-plate style rack

Compact 5x16 array makes filling and transfer easy

- Frosted labeling area on bottom of rack
- Embossed index numbers for quick sample ID and retrieval
- Made of polypropylene



							Pac	k of 5
Item No.	Color		Part No		Color			
HS29025A	Natural		HS2902	5E	Yellow	1		
HS29025B	Blue		HS2902	5F	Orang	е		
HS29025C	Green		HS2902	5G	Assor	ted*		
HS29025D	Pink		HS2902	5J	Red			
		*Assc	rted colors	s (Blue,	Green,	Yellow,	Orange,	Pink)
Tubes mL	Wells	We mm	ll Dia.	L x W in	хH	Lx cm	WxH	

1.5/2.0 80	11	8.9 x 2.6 x 1	22.5 x 6.7 x 2.8





Storage Racks for 80-well Racks

Strong, clear acrylic construction

These racks help you keep large numbers of microtubes organized on your benchtop.

- Holds up to eight 80-well microtube racks filled with either _ 1.5 or 2.0 mL microtubes
- Plenty of room to slide the racks in and out

Item No.	Description	Color	L x W x H in	L x W x H cm
HS23263A	Vertical	Clear	6.2 x 9.3 x 9.2	15.7 x 23.6 x 23.4
HS23263B	Horizontal	Clear	12.2 x 9.3 x 4.8	31 x 23.6 x 12.2

Microtube Racks

Durable, Simple to Use

- Made from reinforced nylon offering superior chemical and heat-resistance over most other plastic based racks
- Handles provide easy and safe transportation
- Stable design can be used in water baths _
- Alphanumeric identification for quick location and _ retrieval of tubes

AUTOCLAVABL 121° C

Item No.	Color	Tubes mL	Wells	Well Dia.	Packaging	L x W x H in	L x W x H cm
120241	Pluo	1.5/2.0	24	- 11.1	8	5.6 x 3.5 x 2	14.3 x 9 x 5.2
120243	– Blue	1.5/2.0	96		4	8.3 x 5.2 x 2.1	21 x 13.1 x 5.4



Tel: (866) 433-6682

www.novatech-usa.com

Learn more about our convenient multi-functional working rack solutions:

Clinical 4-Way Tube Rack

The only tube rack specifically designed to hold round, flat & conical blood collection and culture tubes

- _ Accommodates all brands of 13 and 17 mm round, flat and conical bottom blood collection & culture tubes
- Customize the rack to fit the number of wells required, infinite units can be linked together or use one standalone unit
- Molded alphanumeric identification for _ quick location and retrieval of tubes

For more details and ordering information see page 70

- Robust, made from polypropylene that is chemical resistant and easy to clean
- Racks can be used in water baths and
- Patent Pending



TracRack[®] Tube Rack


Take what you need and store the rest

Comprised of a storage box and eight removable tube segments allowing you to easily take what you need an entire segment or individual sample - and store the rest!

Convenient Rack System

- Eight polypropylene segments hold 1.5/2.0 mL cryo and microcentrifuge tubes (64 tubes)

For more details and ordering information see page 128



	1								-
10	2A	зА	4A	5A	6A	7A	8A	9A	10.4
1E	2B	38	4B	5B	6B	7B	8B	9B	10B
1C	2C	зС	4C	5C	6C	7C	8C	9C	10C
10	2D	3D	4D	5D	6D	7D	8D	9D	10D
1E	2E	ЗE	4E	5E	6E	7E	8E	9E	10E
1F	2F	ЗF	4F	5F	6F	7F	8F	9F	10F
1G	2G	3G	4G	5G	6G	7G	8G	9G	10G
1H	2H	зн	4H	5H	6H	7H	8H	9H	10H
11	21	31	41	51	61	71	81	91	101
	2J	3J	4J	5J	6J	7J	8J	9J	105

Alphanumeric Identification

for quick location and retrieval of tubes

Microtube Storage Boxes

- Hold 1.5 and 2.0 mL microcentrifuge tubes and cryogenic vials



Stylish & Identifiable

- Made of translucent, vibrantly colored polypropylene allows for visibility inside box and color coding identification
- Tube capacity is indicated on the outside the box within a distinctive wave design
- Quick visual identification with uniform wells and alphanumeric location identification along with a frosted labeling area

Robust

- Easy open and secure lid fitted with either friction fit or snap clasp designs
- Stackable, saving valuable space in the lab

50-Well Microtube Storage Boxes

			C	Pack of 5
Item No.	Color			
120032	Natural			
120033	Assorted*			
			*Assorted colors (Blue, Gree	n, Purple, Yellow, Orange)
Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
1.5/2.0	50	12.3	5.6 x 3.6 x 2.2	14.2 x 9.2 x 5.6



81-Well Microtube Storage Boxes

- Black, light blocking version available for light sensitive samples

				PACK UI S
Item No.	Color		Item No.	Color
120034	Natural		120038	Yellow
120035	Blue		120039	Orange
120036	Green		120040	Assorted*
120037	Pink		120041	Black
			*Assorted colors (Bl	ue, Green, Yellow, Orange, Pink)
Tubes	Wells	Well Dia.	L x W x H	L x W x H
mL		mm	in	ст
1.5/2.0	81	12.3	5.1 x 5.1 x 1.9	13 x 13 x 4.7

Pack of 5

100-Well Microtube Storage Boxes

- Black, light blocking version available for light sensitive samples

- Black, lig	- Black, light blocking version available for light sensitive samples Pack of 5								
Item No.	Color		Ite	em No.	Color				
120042	Natural		12	20202	Green				
120043	Black		12	20203	Yellow				
120044	Assorted*		12	20204	Orange 📃				
120201	Blue								
		*Assorted	d colors (Purple, Blu	ie, Green,	Yellow, Orange, Pink)				
Tubes mL	Wells	Well Dia.	L x W x H in	ג L כת	(W x H				
1.5/2.0	100	12.3	5.6 x 6 x 2.2	14	.1 x 15.1 x 5.7				

Tel: (866) 433-6682

Rota-Rack® Tube Racks

Get organized with this interlocked rack

Each module is interlocked and adjustable with just a twist allowing you to work with multiple sized tubes in the same rack


- Suitable for variety of culture, centrifuge, micro-centrifuge, round, flat or conical bottomed tubes
- Two versions to accommodate small and large tube sizes

AUTOCLAVABLE

Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm	
	Yellow	50	2	29		22.4 x 11 x 11	
HS29040A	Green	10–15	8	20	00112112		
N329040A	Blue	15–20	6	16	0.0 X 4.3 X 4.3		
	Purple	10–13	10	13.5			
	Yellow	15	6	16.4		21 x 10 x 10	
HS29040B	Green	1.5/2.0	9	11.2	8.2 x 3.9 x 3.9		
11323040D	Blue	0.5	12	8	0.2 x 3.9 X 3.9		
	Purple	0.2	32	6.5			



Version available for PCR and Microtubes:

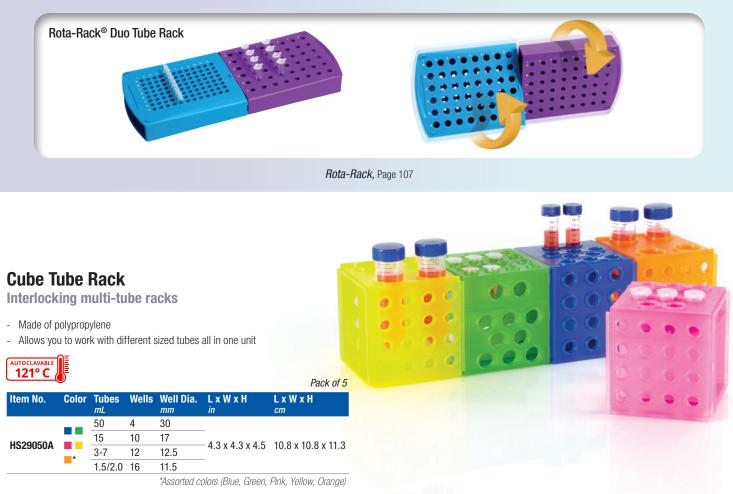



Check out our Clinical Version

Accommodates all brands of 13 and 17 mm round, flat and conical bottom blood collection & culture tubes



Clinical 4-Way Tube Rack, Page 70

Tel: (866) 433-6682

www.novatech-usa.com sales@i

Transformer Cube Tube Rack

Low temp storage of large samples, 15 mL & 50 mL tubes

- Quick change over with 2 snap-in inserts that hold 15 and 50 mL tubes
- Rack keyed and numeric wells for tube identification
- Clear Lid included for viewable, stackable storage
- Open space available under insert for extra storage



Item I

HS232



						Pack of 5
No.	Color	Tubes mL	Wells	Well Dia.	L x W x H Dia.	L x W x H cm
271A Purple	15	16	18	- 5.25 x 5.25 x 5.125	12 0 x 12 0 x 12 0	
	50	9	31	- 5.25 X 5.25 X 5.125	13.2 % 13.2 % 12.9	

OneRack® Multi

Exclusive design, optimal functionality

The most flexible tube rack designed for use with a multitude of tube diameters and heights

Holds virtually any brand tube 10-30 mm of varying heights

Multiple Configurations for Workflow Efficiency

- Interchangeable tube rack inserts hold multiple tube sizes firmly in place when alternating between sample vessels
- Inserts can be pivoted in either an upper or lower position to securely accommodate the size and height of tube being used

Multi-Functional Design

- Open design allows for better filling visibility of tube graduations when filling
- Rack wells have a unique teardrop design that enables better retention of tubes over traditional designs
- Rotate tube rack insert to an angle position to facilitate more comfortable pipetting



Angled position for more comfortable pipetting

Tear drop shape allows for better retention of tubes

Unique Well Design


Alphanumeric grid for quick sample identification and retrieval **Ergonomic handles** for ease of transporting the rack Lower position is ideal height when working with shorter microcentrifuge tubes



Included: 1 Base + 6 Tube Rack Inserts

	٧.								11
1	J								
-	1	2		2	7	7		7	21
		_	_	_					

Two 10-13 mm Tube Racks Fits 5 mL, 7.5 mL, 10 mL Tubes



Two 13-17 mm Tube Racks Fits 5 mL, 15 mL Tubes



Two 25-30 mm Tube Racks Fits 25 mL, 50 mL Tubes

US Patent No. 9776188

OneRack® Multi

Item No.	Color	L x W x H in	L x W x H cm	# Inserts Included	Well Dia./Insert	Wells/Insert
				6 (2 ea/	13 mm	20
120817	Blue/Natural 📃 🗌	12.2 x 4.2 x 3	30.9 x 10.7 x 7.7	Diameter)	17 mm	20
				Diameter)	30 mm	6
				6 (2 cc/	13 mm	20
120818	Purple/Natural 🔳 🗌	12.2 x 4.2 x 3 30.9 x 10.7 x 7.7 6 (2 ea/ 17 mm	17 mm	20		
	·			Diameter)	30 mm	6

Tel: (866) 433-6682

www.novatech-usa.com

Adapt-a-Rack® Adaptable Multi-tube Rack

Each well has fingers that flex that adapt to accommodate a variety of tubes sizes while holding them in a firm upright position

- Made of POM
- Racks can be linked together for additional capacity

- Open sides allow for label viewing
- Flat base to hold tubes upright
- Available in solid or a combination of colors for easy coding identification





THE THE

Item No.	Rack #1 Color	Rack #2 Color	
120184	Blue/Green	Green/Blue	
120185	Blue/Yellow	Yellow/Blue	
120186	Pink/White	White/Pink	
120187	Blue/Blue	Blue/Blue	
120188	White/White	White/White	
120189	Pink/Pink	Pink/Pink	
120190	Yellow/Yellow	Yellow/Yellow	
120191	Green/Green	Green/Green	

Pack of 2

Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
7–50	4	12–30	7.1 x 2.2 x 3	18.1 x 5.6 x 7.6

Looking for racks for tube rollers?:



Tube Roller Racks, Page 72

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

One-Well Connecting Tube Racks

Form a line or use as a single, stand-alone polypropylene rack

- Open Design enables easy identification of samples
- Molded circular base ring keeps conical or round-bottom tubes in place

- WOULEU C	Pack of 5					
Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
HS23052	 . *	50	1	29	3.2 x 2.8 x 2.6	8.3 x 7 x 6.7

*Assorted colors (Blue, Green, Yellow, Orange, Pink)



One-Well Friction-Fit Tube Rack

- Made from polystyrene
- Open Design enables easy identification of samples
- Holds conical and round bottom tubes
- Slides smoothly across the benchtop

One-Well Wire Tube Rack

- HDPE-coated steel wire
- Holds conical and round bottom tubes
- Open Design enables easy identification
- of samplesBase ring keeps tubes in place





One-Well Friction-Fit Tube Rack Pack of 5									
Item No.	Color		Tubes mL	Wells	Well Dia.	W x H in	W x H cm		
HS23053A	Blue		50	1	29	3.6 X 1.2	9.2 x 3		

One-Well Wire Tube Rack

Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
HS23051	Yellow	50	1	29	3.5 x 2.6 x 2.6	9 x 6.7 x 6.7





Snap-Together Conical Tube Rack

Space Saver - shipped flat and easy-to-assemble

Conveniently holds 15 and 50 mL tubes simultaneously

- ABS racks snap together securely and are designed for stable use in water baths
- Alphanumeric identification for quick location and retrieval

Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in (cm)
HS24306	Orongo	15	30	17	6.7 x 8.1 x 2.3
	Urange –	50	20	28	(17.1 x 20.6 x 5.9)

Adjustable Twist the knob to adjust the well sizes for your tubes

Universal Tube Rack

Ideal for holding a wide range of tubes

- Made of polypropylene
- Holds up to 12 similar size tubes
- Alphanumeric identification for quick location and retrieval of tubes
- Side handles for easy transport

Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
HS24330A	White/Purple	15–50	12	16–30	7.6 x 5.5 x 2	19.4 x 14 x 5.1

13

12

Fits

50 mL

Conical

Tubes

13

12-

11



www.novatech-usa.com

Pop-Up Tube Racks

Collapse for compact storage and "pop-up" for quick use

Designed to save space!

- Easy to open, holds 15 and 50 mL tubes
- Easy to close, stackable for compact storage
- Alphanumeric well identification for quick location and retrieval of samples

				Pack of 2
Item No.	Color	Tubes mL	Wells	Well Dia. mm
HS24320B	Blue	15. 50	01 10	17 20
HS24320P	Pink 📕	15, 50	21, 12	17, 30
HS24318	Purple	15	45	17
HS24319	Green 📃	50	18	30
L x W x H (Expanded) in	L x W x H (Collapsed) in	L x W x H (Expanded) cm		L x W x H (Collapsed) cm
10 x 5.4 x 2.8	10 x 5.4 x 0.8	25.5 x 13.7 x	7.2	25.5 x 13.7 x 2.1

Save Space

Rack easily "Pops" open for easy use







Fold and Snap Tube Rack

Economical durable rack


- Polypropylene racks ship flat in one piece
- Easy-to-assemble, just fold and snap Color code for easy identification together
- Stable design can be used in water baths

90-Well



60-Well 40-Well

- Open design allows samples to be incubated at the same temperature

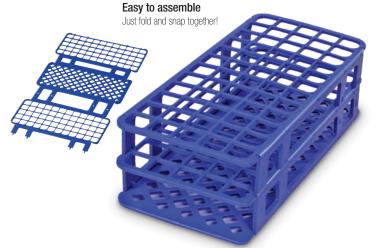

Item No.	Color		Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm	
HS243073B	Blue							
HS243073W	White		- 5 - 10 -	90	13	9.6 x 4.1 x 2.4	24.5 x 10.5 x 6.3	
HS243073R	Red			90	15			
HS243073Y	Yellow							
HS243077B	Blue							
HS243077W	White		-	60	16	9.6 x 4.2 x 2.8	04 E y 10 0 y 7 0	
HS243077R	Red		5–15				24.5 x 10.8 x 7.2	
HS243077Y	Yellow							
HS243071B	Blue							
HS243071W	White		F 20	40		9.8 x 4.2 x 2.8	04 0 y 10 0 y 7 0	
HS243071R	Red		- 5–30	40	20		24.9 x 10.8 x 7.2	
HS243071Y	Yellow							

Tel: (866) 433-6682



Tough and highly resistant to acids, bases, solvents and heat

Durable racks are molded in a single, continuous piece so no assembly required and no detachable pieces

- Flat labeling area for easier identification

Stable design for use with water baths

Intuitive Design

- Unique tear drop shaped openings offer better retention of tubes
- Molded in coordinates for tube orientation
- Available in two materials:

Fiberglass-Reinforced Polyoxymethylene (POM)

- Available in half and full rack sizes for 5 different tube diameters
- Offers the highest chemical and heat resistance (-40 to +121°C)

Polypropylene

- Available in full rack sizes for 2 different tube diameters
- Offers good chemical and heat resistance (0 to 110°C)

OneRack [®]	Full-Size	PON	1	AUTOCLAVABLE LOW TEMP 121°C			
Item No.	Color		Tubes mL	Wells	Well Dia. mm	L x W x H in (cm)	
HS27511A	White		_				
HS27511B	Blue		_			7.9 x 4 x 2.3	
HS27511C	Green		5–10	72	13	(20.2 x 10.4	
HS27511D	Magenta		_			x 5.9)	
120205	Yellow						
HS27512A	White						
HS27512B	Blue					9.8 x 5 x 2.7	
HS27512C	Green		5–10	72	16		
HS27512D	Magenta					(25 x 12.7 x 7)	
120206	Yellow		-				
HS27513A	White					9.9 x 3.9 x 3.2	
HS27513B	Blue		10–18	40	20	(25.2 x 10 x	
HS27513C	Green		10-10	40	20	(
HS27513D	Magenta		-			8.3)	
HS27514A	White						
HS27514B	Blue		10–18	40	25	11.8 x 4.7 x 3.6	
HS27514C	Green		10-10	40	20	(30 x 12 x 9.2)	
HS27514D	Magenta		-				
HS27515A	White						
HS27515B	Blue					11.1 x 4.3 x 3.3	
HS27515C	Green		15–50	24	30	(28.2 x 11 x	
HS27515D	Magenta		_			8.5)	
120207	Yellow		-				

	1	-	-	

OneRack [®]	Half-Size	121° C	-40° C		
Item No.	Color	Tubes mL	Wells	Well Dia.	L x W x H in (cm)
HS27501A	White				
HS27501B	Blue	5–10	36	10	4.1 x 4.1 x 2.3
HS27501C	Green	01-6	30	13	(10.4 x 10.4 x 5.9)
HS27501D	Magenta				
HS27502A	White				
HS27502B	Blue		36	16	5 x 5 x 2.7
HS27502C	Green	5–10			0 / 0 / 20
HS27502D	Magenta				(12.7 x 12.7 x 7)
120399	Yellow				
HS27503A	White				4 x 5 x 3.2
HS27503B	Blue	10–18	20	20	
HS27503C	Green				(10 x 12.7 x 8.3)
110075044	\A/I-14-	10 10	10	05	4.7 x 4.8 x 3.6
HS27504A	White	10–18	16	25	(12 x 12.2 x 9.2)
HS27505A	White				
HS27505B	Blue	15 50	0	20	4.3 x 4.3 x 3.3
HS27505C	Green	15–50	9	30	(11 x 11 x 8.5)
HS27505D	Magenta				

100

100

100

10

OneRack® Full-Size Polypropylene

Item No.	Color	Tubes mL	Wells	Well Dia.	L x W x H in (cm)
HS27551A	White				
HS27551B	Blue	5–10	72	13	7.9 x 4 x 5.9
HS27551C	Green	5-10			(20.2 x 10.4 x 5.9)
HS27551D	Magenta	_			
HS27552A	White				
HS27552B	Blue	5–10	70	16	9.8 x 5 x 2.7
HS27552C	Green	5-10	12		(25 x 12.7 x 7)
HS27552D	Magenta				

Tel: (866) 433-6682


www.novatech-usa.com

Coated Wire Racks

Chemically resistant HDPE Coated Wire Racks

- 21

- Holds all brands and types of conical, round or flat bottom, glass or plastic, tubes and/or bottles
- Square wells and three deck levels help keep tubes secure

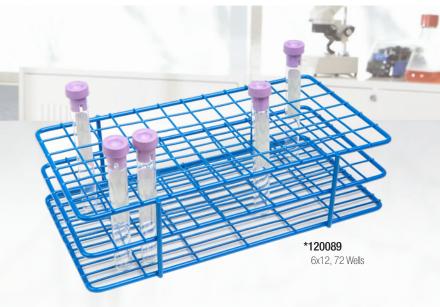

Fits 10-13 mm Tubes

Item No.	Color	Tube Array	Wells	Well Dia.	L x W x H in	L x W x H cm
120089*	Blue	6x12	72	13	8.1 x 4.1 x 2.6	20.5 x 10.5 x 6.5
120759	Blue	9x12	108	13	8 x 6.4 x 2.6	20.4 x 16.1 x 6.5



Fits 13-16 mm Tubes

Item No.	Color	Tube Array	Wells	Well Dia.	L x W x H in	L x W x H cm
120760	Blue	4x10	40	16	7.9 x 3.3 x 2.4	20 x 8.3 x 5.9
120761*	Blue	4x12	48	16	9.4 x 3.3 x 2.4	23.7 x 12.7 x 5.9
HS23072	Blue	6x12	72	16	9.5 x 5 x 2.6	24.1 x 18.8 x 6.5
120763	Blue	9x12	108	16	9.3 x 5 x 2.6	23.7 x 12.7 x 6.5
HS23108	Red 📕	9x12	108	16	9.3 x 5 x 2.6	23.7 x 12.7 x 6.5

Fits 16-18 mm Tubes – 1 5mL

Item No.	Color		Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm		
HS23215*	Blue		3x5	15	20	5 x 3 x 3	12.7 x 7.6 x 7.6		
Fits 16-20 mm Tubes – 15 mL Norm No. Color Tube Arrow Well Dia. L x W x H L x W x H									
		bes		Welle	Well Dia.	LxWxH	LxWxH		
Fits 16-20 Item No.	mm Tu Color	bes	– 15 mL Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm		
		bes		Wells 40		in			



***HS23215** 3x5, 15 Wells

* 120768 8x10, 80 Wells

Fits 20-24 mm Tubes

WxH	L x W cm	L x W x H in	Well Dia.	Wells	Tube Array	Color	ltem No.
<10.7 x 8	2 26 x1	10.2 x 4.2 x 3.2	24	40	4x10	Blue	120766
				40		Blue	120766

FILS 20-25	mm iu	bes					
Item No.	Color		Tube Array	Wells	Well Dia.	L x W x H in	L x W x H cm
120769	Blue		3x8	24	25	10.7 x 4.1 x 3.2	27.3 x 10.5 x 8
120767	Blue		4x10	40	25	11.4 x 4.7 x 3.1	29 x 11.8 x 8
120768*	Blue		8x10	80	25	11.4 x 9.1 x3.1	29 x 23 x 8

Tel: (866) 433-6682

Coated Wire Racks

Chemically resistant HDPE Coated Wire Racks

		Fits 25-30 (mm Tut	bes	- 50 i	mL			
	Ì	Item No.	Color		Tube Array	Wells	Well Dia.	L x W x H in	L x W x H cm
		HS232461*	Blue		2x4	8	30	5.8 x 3.2 x 3.5	14.7 x 8 x 8.9
		120770	Blue		6x8	48	30	10.9 x 8.3 x 3.9	27.7 x 20.9 x 9.8
-	*HS232461 2x4, 8 Wells								

Fits 30-40 mm Tubes

Item No.	Color	Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm
120771*	Blue	3x8	24	40	14.1 x 5.5 x 3.9	35.7 x 13.9 x 9.8
120772	Blue	6x8	48	40	14 x 10.6 x 3.8	35 x 26 x 9.8





Fits 23-25 mm Bottles - Bijou Bottles

ltem No.	Color	Tube Array	Wells	Well Dia.	L x W x H in	L x W x H cm
120085	Blue	2x6	12	25	6.4 x 2.5 x 1.3	16.4 x 6.4 x 3.2
120086*	Blue	5x10	50	25	10.7 x 5.7 x 1.3	27.1 x 14.5 x 3.2

Fits 30-33 mm Bottles - Universal & McCartney Bottles

Item No.	Color	Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm
120087*	Blue	2x6	12	33	8.3 x 3.1 x 2.4	21.2 x 8 x 6
120088	Blue	5x10	50	33	14 x 7.5 x 2.4	35.3 x 19 x 6





Fits 55-58 mm Bottles - Urine Containers

Item No.	Color	Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm
120091*	Blue	4x6	24	58	15.5 x 10.3 x 2	39.3 x 26.2 x 5

Fits 55-60 mm Bottles - Centrifuge Bottles

Item No.	Color	Tube Array	Wells	Well Dia. mm	L x W x H in	L x W x H cm
HS23224*	Blue	2x3	6	60	8.1 x 5.3 x 4.1	20.5 x 13.5 x 10.4



Mega Rack®

High-capacity storage for your tubes

Fully assembled, polypropylene mega racks are great for high throughput labs requiring large sample storage

- Sturdy, material for easy and secure transport of blood collection and other tubes
- Alphanumeric identification for quick location and retrieval of tubes
- Place different test groupings into one rack eliminating the need for multiple racks

Mega Racks [®] 10 ⁴	-13 mm - I	Holds 5-7 r	nL sample tubes
---	------------	-------------	-----------------

Item No.	Color	Wells	Well Dia.	L x W x H in	L x W x H cm	Material
HS24322A	Blue	- 216	13	133 x 93 x 36	33.7 x 23.5 x 9.1	PP
HS24322E	White	210	15	13.3 × 3.3 × 3.0	55.7 X 25.5 X 5.1	
120112	White	- 432	13	26 5 y 0 2 y 2 5	67.3 x 23.5 x 9.0	PP
120113	Blue	432	13	20.3 x 9.3 x 3.3	07.5 X 25.5 X 9.0	ΓF

AUTOCLAVABLE 121° C

Mega Racl	Nega Racks® 13-16 mm - Holds 10 mL sample tubes									
Item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm	Material				
HS24323A	Blue	— 120	16	12 2 v 10 5 v 2 6	33.7 x 26.7 x 9.1	PP				
HS24323E	White	120	10	13.3 × 10.3 × 3.0	55.7 X 20.7 X 9.1	ГГ				
120114	White	— 240	16	26 E v 10 E v 2 E	67.3 x 26.7 x 9.0	PP				
120115	Blue	240	10	20.3 x 10.3 X 3.3	07.3 X 20.7 X 9.0	۲٢				

Mega Racks[®] 18-20 mm - Holds 15 mL conical/swab tubes

and 20 m	m round bot	tom tubes				121° C
Item No.	Color	Wells	Well Dia. mm	L x W x H in	L x W x H cm	Material
120834	White	— 120	20	140 × 110 × 26	37.7 x 30.1 x 9.1	РР
120835	Blue	120	20	14.9 X 11.9 X 3.0	37.7 X 30.1 X 9.1	FF

Mega Racks[®] 28-32 mm - Holds 50 mL conical/swab tubes

Item No.	Color	Wells	Well Dia.	L x W x H in	L x W x H cm	Material
*120958	Blue	100	32	16.2 x 16.7 x 4.7	41 0 v 40 0 v 10	ABS
*120959	White	- 100	32	10.2 X 10.7 X 4.7	41.2 X 42.3 X 12	ADO



Peg Tube Racks


Strong, tough, versatile racks for bench use or tube storage

Fiberglass-reinforced polypropylene racks are ideal for bench work or tube storage

- Spacious peg design allows easy viewing of tube contents
- Pegs remain straight even after repeated autoclaving
- Embossed alphanumeric identification for quick location and retrieval of tubes



Unique tear drop well design



AUTOCLAVABLE 121° C

Tel: (866) 433-6682

www.novatech-usa.com

Cold Products & Storage

From cool-looking ice containers to freezer necessities, our innovative range of cold products continues to expand



Cooling Containers Low Temp Racks & Storage Freezer Boxes, Racks & Accessories

Tel: (866) 433-6682

www.novatech-usa.com



Durable containers for chilling temperature-sensitive samples Suitable for low temperature use. Ideal for ice, ice slurries and CO₂ pellets

- Made from polyurethane with metal inserts for stability
- Close-fit lid keeps evaporation to a minimum and features a comfortable recessed knob

- Tapered design for easy stacking
- Precise pour spout and large handles



Lid nests under bucket for convenience and to save space

Item No.	Color	Style	Capacity liters	L x W x H in	L x W x H cm
HS28714K	Black	Bucket	4	7.1 (H) x 9.2 (D)	18.1 (H) x 23.4 (D)
HS28721G	Green	Pan	1	10.5 x 7.7 x 4.5	26.7 x 19.6 x 11.4
HS28724B	Blue	Pan	4	15 x 10 x 5.5	38.1 x 25.4 x 14
HS28729R	Red	Pan	9	20.5 x 11.5 x 6.4	52.1 x 29.2 x 16.3

Learn more about our open rack systems that work perfectly with our Cooling Containers



Fold and Snap Tube Rack, Page 117

OneRack[®] Tube Rack, Page 118

Tel: (866) 433-6682

www.novatech-usa.com

Floating Microtube Rack

For use on bench and in ice and water baths

- Made of polypropylene
- Attach legs and rack stands upright for use on bench top
- Detach legs and samples can be quickly removed by pushing down onto any surface

	ລະ	-			-
AUTOCLAVABLE		Ξ (LOW TEMP		E.
1210 C		E	0º C	L	E
	5				5

					Pack	of 4
Item No.	Color	Tubes mL	Wells	Well Dia. mm	Shape/Dia.	
HS2132A	- White	1.5/2.0	16	<u>mm in</u> 1610.9Squ	Square 4	
HS2134A	wille	1.3/2.0	20	10.9	Round 3.8	



						Pack of 5
Item No.	Color	Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
HS2165A	Green	50	4	29	6.4 x 5.3 x 2.5	16.5 x 13.7 x 6.5
HS2165B	Blue	15	8	16	6.7 x 2.2 x 2.5	17.2 x 5.7 x 6.5
HS2165C	Yellow	1.5/2.0	24	9.3	6 x 3.2 x 2.7	15 x 8.3 x 7
HS2166	Blue	0.2/0.5/1.5/2.0	18	9.3	3.2	8.2 dia.





Vented Lid enables faster cooling of samples while in freezer

PCR Cooler, 96-Well

Ice-Free Cooling System for PCR Preparation and Storage

Cools industry standard format PCR tubes, strips and single format as well as most standard and low profile 96-Well plates

Consistent & Reliable

- Modern design cools faster in freezers and stays cold longer on the bench top
- Maintains the entire 96-Well plate at a temperature of 0 °C for over an hour
- Maintains sample temperature of less than 5°C for up to three hours (with lid off)
- When the temperature ceiling of 6°C has been exceeded, users are signaled by a contrasting color change of the cooler or a single well




NNNN

Ergonomic Textured Finger Grips

provide a secure hold, reducing the chance of dropping the PCR rack, and makes handling and transportation easy, especially when using gloves

Two Color Contrasting Options Available purple to pink or dark blue to light blue allowing easy monitoring of samples

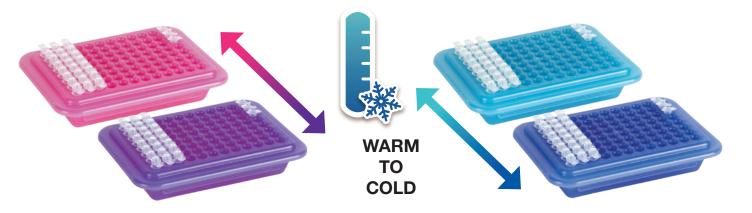

				US Patent Pending, Co.	mmunity Design No: 0041	01756-0001-0002	Pack of 2
Item No.	Warm Color	Cold Color	Wells	Tube Sizes mL	L x W x H in	L x W x H cm	
120727	Pink 📃	Purple		0.0			
120728	Light Blue 📃	Dark Blue	96	0.2	4.3 x 5.8 x 1.9	11 x 14.8 x 4.8	
120729	Assorted*			Assay Plates			

*Assorted colors (Light Blue/Dark Blue & Pink/Purple

Tel: (866) 433-6682

www.novatech-usa.com sales@novatech-usa.com

Need to keep your reagents cool while working?

Check out our ice-free Reagent Reservoir Chillers with temperature color changing feature



Mini Benchtop Coolers

Protect temperature-sensitive samples at the bench or in the freezer

Ideal for keeping samples or reagents cool during testing

- Polycarbonate construction with rubber non-slip feet
- Coolers 120072 and 120075 are filled with a self-insulating gel to _ improve cooling capacity of unit









Tube Array 8 x 12 4 x 8 3 x 4

Item No.	Color	Tubes mL	Lid	Tube Array	Wells	L x W x H in	L x W x H cm	Temp.	Temp. Retention
120070	Green		Clear	3 x 4	12	5.7 x 4.1 x 3.9	14.5 x 10.5 x 10	0°C	1°C for 3 hr
120071	Green	0.5-2.0	Clear	4 x 8	32	9.6 x 4.1 x 3.9	24.5 x 10.5 x 10	0°C	1°C for 2 hr
120072	_		Gel Filled	4 x 8	32	9.6 x 4.1 x 3.9	24.5 x 10.5 x 10	0°C	1°C for 5 hr
120073	Blue		Clear	3 x 4	12	5.7 x 4.1 x 3.9	14.5 x 10.5 x 10	-20°C	-15°C for 1 hr
120074	Dine	0.5-2.0	Clear	4 x 8	32	9.6 x 4.1 x 3.9	24.5 x 10.5 x 10	-20°C	-15°C for 1 hr
120075			Gel Filled	4 x 8	32	9.6 x 4.1 x 3.9	24.5 x 10.5 x 10	-20°C	-15°C for 1 hr
120076	Blue	0.2	Clear	8 x 12	96	8.9 x 6.5 x 4.3	22.5 x 16.5 x 11	-20°C	-15°C for 2 hr

Tel: (866) 433-6682

www.novatech-usa.com

Freezer Boxes Reusable and Affordable Page 133

Freezer Racks A variety of racks to safely store samples in your freezer Page 135

TracRack[®] Tube Rack

Take what you need and store the rest

Comprised of a storage box and eight removable tube segments allowing you to easily take what you need - an entire segment or individual sample - and store the rest!


Convenient Rack System

- Eight polypropylene segments hold 1.5-2.0 mL cryo and _ microcentrifuge tubes (64 tubes)
- Wells feature a center depression stabilizing conical tubes and a cryogenic vial lock for one-handed cap removal
- Printed index letters on each segment make for quick sample ID and retrieval




TracRack[®] Outer Box

- Made from thin film polypropylene material -
- Moisture and mold resistant
- 2 in (5.3 cm) boxes fit in standard freezer racks
- Not recommended for autoclaving _

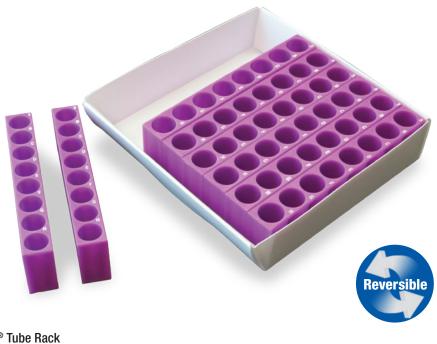

TracRack [®]	Tube	Rack
-----------------------	------	------

Item No.	Color	ĸ	Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
120356	Purple		1.5/2.0	64	12.3	5.1 x 5.1 x 1.4	12.9 x 12.9 x 3.5

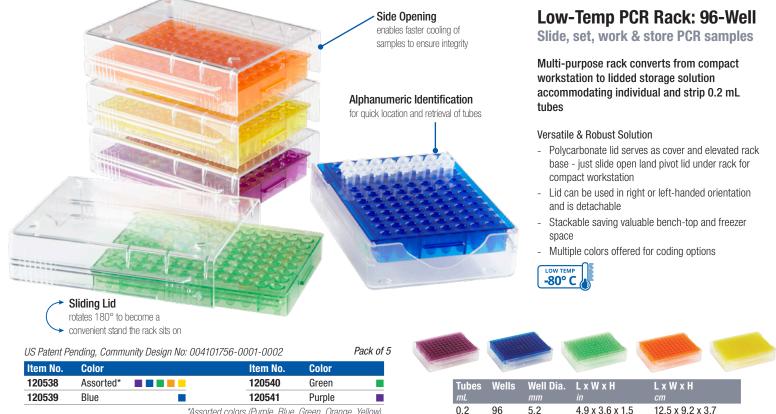

*Assorted colors (Purple, Blue, Green, Orange, Yellow)

Tel: (866) 433-6682

www.novatech-usa.com

	1	_	_	-	1	_		r	-
10	2A	зА	4A	5A	6A	7A	8A	9A	10.4
1E	2B	38	4B	5B	6B	7B	8B	9B	10B
10	2C	зС	4C	5C	6C	7C	8C	9C	10C
10	2D	ЗD	4D	5D	6D	7D	8D	9D	10D
1E	2E	3E	4E	5E	6E	7E	8E	9E	10E
1F	2F	ЗF	4F	5F	6F	7F	8F	9F	10F
16	2G	3G	4G	5G	6G	7G	8G	9G	10G
1H	2H	зн	4H	5H	6H	7H	8H	9H	10H
11	21	31	41	51	61	71	81	91	101
	2J	3J	4J	5J	6J	7J	8J	9J	100

Microtube Storage Boxes

- Hold 1.5 and 2.0 mL microcentrifuge tubes and cryogenic vials







- Made of translucent, vibrantly colored polypropylene allows for visibility inside box and color coding identification
- Tube capacity is indicated on the outside the box within a distinctive wave design
- Quick visual identification with uniform wells and alphanumeric location identification along with a frosted labeling area

Robust

- Easy open and secure lid fitted with either friction fit or snap clasp designs
- Stackable, saving valuable space in the lab

50-Well Microtube Storage Boxes

Stylish & Identifiable

			-	Pack of 5
Item No.	Color			
120032	Natural			
120033	Assorted*			
			*Assorted colors (Blue, Gree	en, Purple, Yellow, Orange)
Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
1.5/2.0	50	12.3	5.6 x 3.6 x 2.2	14.2 x 9.2 x 5.6

81-Well Microtube Storage Boxes

- Black, light blocking version available for light sensitive samples

ററ	ck	of	5
 га	LΚ	OT	0

Item No.	Color		ltem No.	Color
120034	Natural		120038	Yellow
120035	Blue		120039	Orange 🗧
120036	Green		120040	Assorted*
120037	Pink		120041	Black
			*Assorted colors (Bl	lue, Green, Yellow, Orange, Pink)
Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
1.5/2.0	81	12.3	5.1 x 5.1 x 1.9	13 x 13 x 4.7

100-Well Microtube Storage Boxes

- Black light blocking version available for light sensitive samples

Diabit, ing	gine biobining ve	101011 444		light obholitivo	oumpioo	Pack of 5
Item No.	Color				Item No.	Color
120042	Natural				120202	Green
120043	Black				120203	Yellow
120044	Assorted*				120204	Orange 📃
120201	Blue					
			*Assorted	colors (Purple,	Blue, Green,	Yellow, Orange, Pink)
Tubes mL	Wells	Well Dia		L x W x H in	L ci	xWxH m
1.5/2.0	100	12.3		5.6 x 6 x 2.2	14	4.1 x 15.1 x 5.7

Tel: (866) 433-6682

Transformer Cube Tube Rack

Low temp storage of large samples, 15 mL & 50 mL tubes

- Quick change over with 2 snap-in inserts that hold 15 and 50 mL tubes
- Rack keyed and numeric wells for tube identification
- Polypropylene construction capable of handling extreme storage temperatures

-80° C

- Clear Lid included for viewable, stackable storage
- Open space available under insert for extra storage



Fill with ice and use as a temporary low temperature workstation


Item No.	Color	Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
UC00071A	Durplo	15	16	18		10.0 × 10.0 × 10.0
HS23271A	Purpie	50	9	31	— 5.25 x 5.25 x 5.125	13.2 X 13.2 X 12.9

Store microslides in low temperatures with our Low Temperature Microscope Slide Boxes

Pack of 5



Low Temperature Microscope Slide Boxes, Page 145

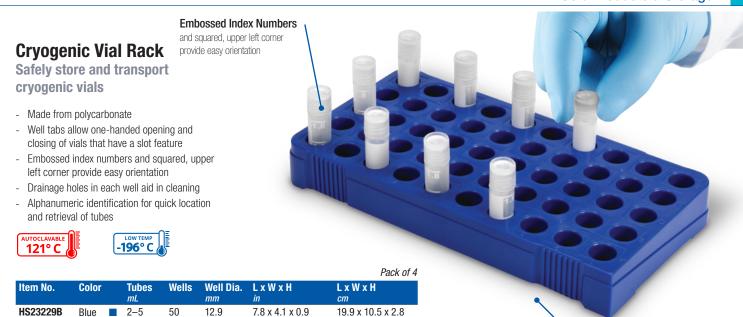

Cryogenic Vial Canes

Organize cryogenic samples in dewars

Aluminum canes hold vials for freezer storage or immersion in $\mathrm{LN}_{\rm 2}$ dewars

- Use in liquid and vapor phase; use approved vials only
- Canes bend to fit all major cryogenic vial brands

-196° C ⊌ ⁼				Pack of 12
Item No.	Tubes mL	No. of Vials	Length in	Length cm
HS23205	1.5/2.0	5	11.4	29
HS23206	1.5/2.0	6	11.8	30

PVC Cryogenic Cane Sleeves

For extra security and sample safety

Clear plastic sleeves protect vials in aluminum canes during handling and storage

- Safe for cryogenic freezing

- More durable than cardboard sleeves
- Transparency allows sample identification without removing sleeve

-196° C				Pack of 10
Item No.	Diameter in	Length in	Diameter cm	Length cm
HS23210	0.6	10.8	1.5	27.5

Ribbed Grips

make handling with gloves easier



Don't miss our line of Cryogenic Vials

Our innovative flush design saves space in your freezer



Tel: (866) 433-6682

www.novatech-usa.com

Cryogenic Vial Boxes & Partitions

For storage of small samples and tubes

- Made from cardboard
- Colors allow for easy identification and sorting purposes
- All box footprints are 13.3 x 13.3 cm, select from two different heights



Cardboard Cryogenic Vial Boxes

Cardboard Cryogenic Vial Boxes Pack of 12							
Item No.	Color		Tubes mL	L x W x H in	L x W x H cm		
HS2860A	White		1.5/2.0	5.2 x 5.2 x 2	13.3 x 13.3 x 5		
HS2860B	White		1.5/2.0	5.2 x 5.2 x 3	13.3 x 13.3 x 7.5		
HS2860C	Assorted						
HS2860CB	Blue		1.5/2.0	5.2 x 5.2 x 2	13.3 x 13.3 x 5		
HS2860CR	Red						



Partitions	Partitions m	Pack of 12		
Item No.	Array	Tubes mL	Wells	Well Dia.
HS2860E	10 x 10	1.5/2.0	100	11.5
HS2860H	9 x 9	1.5/2.0	81	12
HS2860F	8 x 8	1.5/2.0	64	15
HS2860G	7 x 7	1.5/2.0	49	17.5

Microtube Storage Boxes

Safe microtube storage

Low profile boxes are available in two sizes to accommodate standard 0.5 mL and 0.2 mL microtubes and vessels of a similar size

- Partitions included in the boxes
- Will fit into most standard freezer racking



						Pack of 10
Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H cm
120220	White	0.2	169	9.5	5.2 x 5.2 x 1.1	13.3 x 13.3 x 2.9
120221	White	0.5	100	12	5.2 x 5.2 x 1.6	13.3 x 13.3 x 4.1

15/50 mL Tube **Storage Boxes & Partitions**

- Write-on surface for descriptions or self-numbering systems
- Partitions available in two sizes

	0=
LOW TEMP	
10000	
1-196°C	
	_ (ھ
	-

Cardboard Tube Storage Box & Lid						
Item No.	Color		L x W x H in			
HS2860M	White		5.7 x 5.7 x 4.8			

Partitions	Partition	ns must be orderea	l separately	Pack of 10
Item No.	Array	Tubes mL	Wells	Well Dia.
HS2860T	6 x 6	15	36	23
HS2860P	4 x 4	50	16	35

Cryogenic Vial Tube Storage Box

- Two-piece set-up boxes with finger holds
- Boxes made from paper coated cardboard
- 5 x 5 format for tubes up to 14 mm in diameter
- Partitions are included in each box

-196°



						Case of 200
Item No.	Color	Tubes mL	Wells	Well Dia. mm	L x W x H in	L x W x H mm
120519	Blue 🔳	2.0	25	14	3.4 x 3.4 x 1.5	87x87x38

Tel: (866) 433-6682

Pack of 10

LxWxH

14.5 x 14.5 x 12.2

ст

Freezer Boxes

Reusable and Affordable

Easy to assemble boxes made from polypropylene material

- Moisture resistant, more durable than cardboard boxes
- Dividers included with the boxes
- Corrugated Polypropylene: Store down to temperatures of -80°C with appropriate temperature viable tubes
- Thin Film: Can be used in mechanical freezers & vessels down to -196°C with appropriate temperature viable tubes
- Vapor phase only



Color

Item No.

Corrugated Polypropylene 0.2/0.5/1.5-2.0/5 mL/Vial

Tubes

Freezer boxes are supplied "flat-packed" Eliminating the hassle of stacking and reduces the amount of space needed for storage

-80° C

Well Dia.


L x W x H

Pack of 10

LxWxH







120383 White 0.5 81 12 5.2 x 5.1 x 1.6 13.3 120262 White 1.5/2.0 81 12 5.2 x 5.1 x 2 13.3 120376 Blue 1.5/2.0 81 12 5.2 x 5.1 x 2 13.3 120387 White 5 25 22.6 5.2 x 5.1 x 2.9 13.3		
120262 White □ 1.5/2.0 81 12 5.2 x 5.1 x 2 13.3 120376 Blue ■ 1.5/2.0 81 12 5.2 x 5.1 x 2 13.3 120387 White □ 5 25 22.6 5.2 x 5.1 x 2.9 13.3	120383 White 0.5 81 12	52v51v16 133v13v/2
120376 Blue ■ 1.5/2.0 81 12 5.2 x 5.1 x 2 13.3 120387 White ■ 5 25 22.6 5.2 x 5.1 x 2.9 13.3		
120376 Blue ■ 120387 White □ 5 25 226 52 x 51 x 2.9 13.3	120262 White 1 5/0.0 81 11	2 5.2 x 5.1 x 2 13.3 x 13 x 5.1
5 25 22.6 5.2 x 5.1 x 2.9 13.3	120376 Blue	5.2 x 5.1 x 2 13.3 x 13 x 5.1
Jacoba Di J.	120387 White _ 5 25 20	2.6 5.2 x 5.1 x 2.9 13.3 x 13 x 7.5
120388 Blue	120388 Blue	2.0 5.2 x 5.1 x 2.9 15.5 x 15 x 7.5
120428 White Vial 100 17 7.4 x 7.8 x 1.6 18.8	120428 White Vial 100 17	7.4 x 7.8 x 1.6 18.8 x 19.8 x 4.1

Wells

d Polyprop	oylene 1	5 mL and $\$$				Pack of 1
Color		Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
White		15	26		5 9 y 5 7 y 1 7	14.7 x 14.5 x 12
Blue		- 15	30	19.8	5.6 X 5.7 X 4.7	14.7 X 14.5 X 12
White		50	16	21.6	E 9 y E 7 y / 7	14.7 x 14.5 x 12
Blue		- 50	10	31.0	J.O X J./ X 4./	14.7 X 14.0 X 12
	Color White Blue White	Color White Blue White	Color Tubes mL White 15 Blue 50	Here Second state Color Tubes mL White Blue White White 15 36	Color Tubes mL Wells mm White 15 36 Blue 50 16 31.6	Polypropylene 15 mL and 50 mL-80° CColorTubes mL Wells mL Well Dia. mm L x W x H inWhite1536 $5.8 \times 5.7 \times 4.7$ White501631.6 $5.8 \times 5.7 \times 4.7$

Thin Polyp	oropylene fil	m 1.5–	-2.0 mL	196° C			Pack of 1
Item No.	Color		Tubes mL	Wells	Well Dia.	L x W x H in	L x W x H cm
120370	White						
120371	Blue		1.5/2.0	81	12.1	5 x 4.9 x 1.9	12.5 x 12.4 x 4.9
120372	Lt. Green						

∩≡



Arctic Squares[®] Polycarbonate Cryostorage Boxes

Safely store cryogenic vials

Our polycarbonate boxes are designed with unique features to help orient, identify and access vials with ease

- Alphanumeric labeling on lid or base (depending on the unit) for quick location and retrieval of tubes
- Liquid nitrogen vent and drainage holes





US Patent No.: D529,622

- Magnet on top of forceps enables easy


- Stackable, saves valuable space in the lab

storing on metal surfaces

EP Registered Design No.: 00551429-0001, 00551429-0002, 00551429-0003

Item No.	Color	Tube Array	Tubes mL	Wells	Well Dia. mm	Lid	Packaging	L x W x H in	L x W x H cm	Forceps
HS23325A	Ruby Red	5 x 5	2.0	25	12.5	Slide On	8	3 x 3 x 2	7.6 x 7.6 x 5.3	
HS23381B	Assorted*	9 x 9	2.0	81	12.5	Hinged	4	5.2 x 5.2 x 2	13.3 x 13.3 x 5.3	\checkmark
HS23300D	Arctic Blue	10 x 10	2.0	100	12.5	Hinged	4	5.2 x 5.2 x 2	13.3 x 13.3 x 5.3	√

*Assorted colors (Ruby Red, Amethyst Purple, Arctic Blue, Emerald Green)

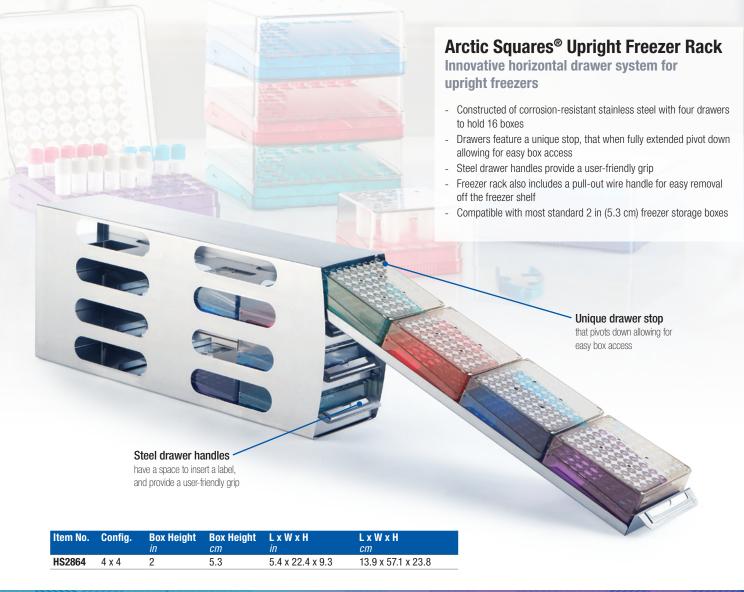

Tel: (866) 433-6682

www.novatech-usa.com

Freezer Racks

A variety of racks to safely store samples in your freezer

Choose from a selection of corrosion-resistant stainless steel racks that are compatible with most brands of upright and chest freezers

 Racks store boxes up to a 135 x 135 mm footprint and accommodate 2" tall boxes (up to 5 cm) as well as 3" tall boxes (up to 7.6 cm) depending on the rack model

Cube Upright Freezer Rack

For 15 and 50 mL tube box storage

- Constructed of corrosion-resistant stainless steel with 6 rack spaces
- Provides safe, convenient storage of your samples
- Handles at each end accommodate freezers with right or left-handed doors
- Compatible with 6 in (15.2 cm) or smaller boxes

Handles for easy transfer Robust mounting brackets assure handles stay securely in place for easy use

Shown with our 15/50 mL Tube Storage Box, Page 135 Transformer Cube Tube Rack, Page 130

Item No.	Config.	Box Size in	Box Size cm	L x W x H in	L x W x H cm	
HS28622	2 x 3	6	15.2	18 x 6.2 x 10.6	45.9 x 15.9 x 27.1	

Get a Grip with Cryogenic & Vaccine Vial Grippers

The Perfect Grip for Optimal Precision



Cryogenic & Vaccine Vial Grippers, Page 102

Tel: (866) 433-6682

Chest Freezer Racks

ltem No.	Config.	Box Size in	Box Size cm	L x W x H in	L x W x H cm
HS2862DB	9 x 1	3	7.6	5.5 x 5.5 x 29	14.1 x 14.1 x 73

Upright Freezer Racks: 2 inch Boxes


Item No.	Config.	Box Size in	Box Size cm	L x W x H in	L x W x H cm
HS2862HA	4 x 3			16.4 x 5.5 x 8.9	41.8 x 14.1 x 22.5
HS2862H	4 x 4	2	5.3	21.8 x 5.5 x 8.9	55.6 x 14.1 x 22.5
HS2862HB	5 x 4			22 x 5.5 x 11	55.6 x 14.1 x 28

Upright Freezer Racks: 3 inch Boxes

Item No.	Config.	Box Size in	Box Size cm	L x W x H in	L x W x H cm
HS2862KB	4 x 4	0	76	22 x 5.5 x 12.8	55.6 x 14.1 x 32.5
HS2862KC	5 x 4	3	7.6	22 x 5.5 x 16	55.6 x 14.1 x 40.6



HS2862H Shown with our 81-Well Microtube Storage Boxes, Page126





Handles for easy transfer Robust mounting brackets assure handles stay securely in place for

HS2862AB

Tel: (866) 433-6682

www.novatech-usa.com

Tips for Keeping your Laboratory Freezer Running Efficiently

Monitor Temperatures

Installing an alarmed thermometer monitoring system, like Heathrow Scientific's Freezer Thermometer, can alert you early to any fluctuations in temperatures that could indicate the need for cleaning or maintenance.

Organize to Ensure Proper Air Flow

Our Freezer Rack systems not only use all optimal storage space available; they also allow for air flow through the unit. With materials stacked and organized, it makes it easier to locate samples quickly, greatly reducing the amount of time the door remains open.

Remove Ice and Frost Routinely

An accumulation of ice and frost on racks and doors can interrupt air flow and overwork the freezer. Defrost on a routine basis to keep your unit in proper working order.

Clear Debris from Compressor Coils

Vacuum or use a brush to clean the compressor coils on the outside of the unit to remove any buildup of dust and grime on a regular basis to keep your unit running smoothly.

Also, be sure not to stack any items on or in front of your units venting system. This could cause the compressor to work overtime to maintain temperatures.

Clean Door Gaskets

To ensure that cold air is not escaping, clean any debris or ice build-up from the door gasket to keep an air-tight seal.

Freezer Thermometer

Protect frozen and chilled samples from potential spoilage

Monitor temperatures inside your freezer or refrigerator with the added convenience of sound and flashing LED lights to alert out-of-range temperatures

- Suction cup attaches the probe inside freezer/refrigerator while the thermometer secures to the outside with hook-and loop tape
- Large digital display shows freezer/refrigerator temperature plus ambient temperature
- Switches toggle for freezer/refrigerator monitoring and °F/°C
- Set freezer range: 14.9° to -9.4°F (-9.5° to -23°C);
- Set refrigerator range: 35.6° to 46.4°F (2° to 8°C)
- Includes one AAA battery



L x W x H	L x W x H
in	ст
4.1 x .79 x 0.9	1.4 x 1.9 x 2.8
	in

Probe Cable measures 0.9 m, Probe measures 5 mm OD x 17 mm L

Microscopes, Slide Storage & Accessories

Products meeting the demanding standards of clinical, research and educational labs



Microscopes Boxes & Storage Racks Folders & Mailers Holders & Staining

Tel: (866) 433-6682

www.novatech-usa.com

VanGuard 1220CM Compound Microscope

The 1220CM is an economical microscope ideal for use in Education/University, Medical/Veterinary, and Industrial applications


- The drop-down X-Y stage control is positioned close to the focus control for quick and easy adjustments
- Accessories and parts are available; contact VEE GEE for more information

Specifications		1220CM	
Optical System		Fixed 160 mm	
	Туре	Binocular (Siedentopf)	
	Tube Inclination	30°	
Viewing Head	Rotation	360°	
ewing Head /epieces osepiece bjectives tage cocusing ondenser	Interpupillary	2.2-3 in / 55-75 mm	
	Dioptric	-5 to +5	
	Magnification	10X	
	Туре	Widefield	
Eyepieces	Field Diameter	0.7 in / 18 mm	
iewing Head yepieces osepiece bjectives tage ocusing ondenser umination pecifications	High-Eyepoint	Yes	
	Rubber Eyecups	Yes	
	Positions	4	
vosepiece	Pitch	Reverse	
	Illumination Technique	Brightfield	12200
	Туре	Achromatic	
Objectives	Magnification (N.A.)	4X (0.10), 10X (0.25), 40X (0.60), 100X (1.25)	
tage	DIN Standard	Yes	
	Туре	Mechanical	
Stage	Shape	Rectangular	
	Dimensions (L x W)	5.5 x 4.3 in / 140 x 110 mm	
	X-Y Control	Drop-down, Right Hand, Rack and Pinion	
	Cross Travel Range	3 x 1.6 in / 75 x 40 mm	1
	Slide Holder	Removable spring clip	
	Finish	Chemical Resistant	
tage X-Y Cc Cross Slide I Finish Type Contro Tensio	Туре	Coaxial	
	Controls	Coarse / Fine	
	Tension Adjustment	Yes	
ocusing	Safety Auto-Stop	Yes	
Stage Focusing Condenser	Focusing Range	0.6 in / 15 mm	
	Precision	0.002 mm	2.
	Туре	Abbe 1.25 N.A. with Iris Diaphragm	
Condenser	Focusing Control	Rack and Pinion	
	Туре	20W Variable Quartz Halogen	
Illumination	Koehler	Field Diaphragm	and the second s
	Filter Holder	On Collector	
	Base (L x W)	8.3 x 7.1 in / 210 x 180 mm; Anti-Skid Rubber Feet	
	Body	Ergonomic; Stain-Resistant Enamel Finish	
Specifications	Dimensions (L x W x H)	8.3 x 7.1 x 15 in / 210 x 180 x 380 mm	
	Weight	7.0 kg	
	Voltage	110 VAC	
Warranty	5-Year Optical/Mechanical; 1-Ye	ar Electrical	
Supplied With	Clear Diffusing Filter, Blue Filter,	Spare Lamp, Fuses and Dust Cover	

VanGuard 1300-Series Compound Microscopes

Ultra-low focus control, angled viewing head, and interpupillary / dioptric adjustments make this microscope comfortable to use

- The compact frame allows easy arm placement to the controls. Plan objectives provide exceptionally high optical flatness and visual clarity
- Choose from binocular or trinocular viewing heads, and Brightfield or Phase Contrast configurations
- Accessories and parts are available; contact VEE GEE for more information

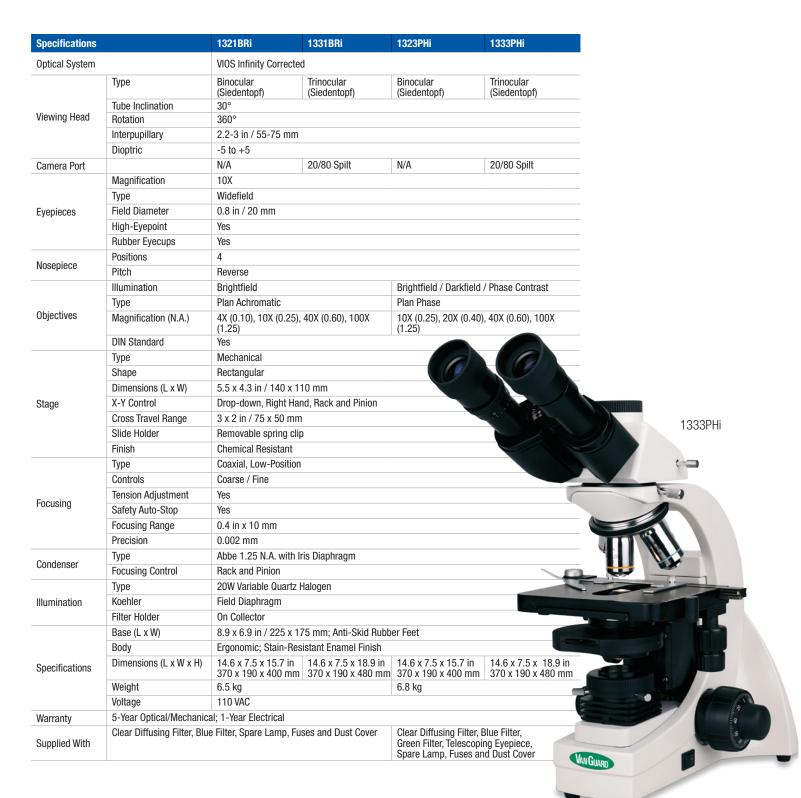

VanGuard 1400-Series Compound Microscopes

Built around a full-size frame, the 1400-Series eliminates the fatigue and strain associated with working long hours over a microscope

- Low-position focusing controls and long drop-down X-Y controls ensure simple, consistent, and comfortable use. Plan objectives provide exceptionally high optical flatness and visual clarity
- Choose from binocular or trinocular viewing heads, and Brightfield or Phase Contrast configurations
- Accessories and parts are available; contact VEE GEE for more information

Specifications		1423PHi	
ptical System		VIOS Infinity Corrected	
	Туре	Binocular	
		(Siedentopf)	
Viewing Head	Tube Inclination	30°	
lewing nead	Rotation	360°	
	Interpupillary	2.2-3 in / 55-75 mm	
	Dioptric	-6 to +6	
Camera Port		N/A	
	Magnification	10X	
	Туре	Widefield	
Eyepieces	Field Diameter	0.8 in / 20 mm	
	High-Eyepoint	Yes	
	Rubber Eyecups	Yes	Sec. 10
Noopiooo	Positions	5	
Nosepiece	Pitch	Reverse	
Objectives	Illumination	Brightfield / Darkfield / Phase Contrast	
	Туре	Plan Phase	
	Magnification (N.A.)	10X (0.25), 20X (0.40), 40X (0.60), 100X (1.25)	
	DIN Standard	Yes	
	Туре	Mechanical	
	Shape	Rectangular	
	Dimensions (L x W)	6.1 x 4.3 in / 155 x 110 mm	2°5 / 1
Stage	X-Y Control	Drop-down, Right Hand, Rack and Pinion	
	Cross Travel Range	3 x 2 in / 75 x 50 mm	ų
	Slide Holder	Removable spring clip	
	Finish	Chemical Resistant	5-
	Туре	Coaxial, Low-Position	
	Controls	Coarse / Fine	
	Tension Adjustment	Yes	
Focusing	Safety Auto-Stop	Yes	
	Focusing Range	0.8 in / 20 mm	
	Precision	0.002 mm	
	Туре	Abbe 1.25 N.A. with Iris Diaphragm	
Condenser	Focusing Control	Rack and Pinion	
	Туре	20W Variable Quartz Halogen	
Illumination	Koehler	Field Diaphragm	
	Filter Holder	On Collector	
	Base	10.2 x 6.7 in / 260 x 170 mm; Anti-Skid Rubber Feet	
	Body	Ergonomic; Stain-Resistant Enamel Finish	VAN GUARD
Creating	Dimensions	14.9 x 8.6 x 16.7 in 14.9 x 8.6 x 20.9 in	
Specifications	(L x W x H)	380 x 220 x 425 mm 380 x 220 x 530 mm	
	Weight	9.3 kg	
	Voltage	110 VAC	
Warranty	5-Year Optical/Mechar		
Supplied With	Clear Diffusing Filter, E	ue Filter, Green Filter, Telescoping Eyepiece, Spare Lamp, Fuses and Dust Cov	er

VanGuard 1353SL Stereo Microscope

VanGuard 1353SL Stereo Microscope features precision optics to ensure the highest level of performance for inspection and dissection applications

- Upper and lower LED lighting provides bright and efficient illumination
- Large stage area gives you room to work with bigger objects
- Accessories and parts are available; contact VEE GEE for more information

Specifications		1353SL
Optical System		Fixed 160 mm
	Туре	Binocular
	Tube Inclination	45°
Viewing Head	Rotation	360°
	Interpupillary	2.1-3.3 in / 53-83 mm
	Dioptric	-5 to +5
	Magnification	10X
Evonionon	Туре	Extra Widefield
Eyepieces	Field Diameter	0.8 in / 20 mm
	Rubber Eyecups	Yes
Stereo Objectives		1X and 3X
Stage	Plate	Translucent Acrylic
Slaye	Clips	Stainless Steel, Spring-Loaded
Focusing Movement		Dual Knobs; Rack and Pinion Assembly
Vertical Travel		125 mm
Illumination	Upper	LED
mummauon	Lower	LED
	Base	11.4 x 10.2 in / 290 x 260 mm
	Body	Ergonomic; Stain-Resistant
Specifications	Dimensions (L x W x H)	11.4 x 10.2 x 19.7 / 290 x 260 x 500 mm
	Weight	4.5 kg
	Voltage	110 VAC
Warranty	5-Year Optical/Mechanical;	1-Year Electrical
Supplied With	Eyecups (2) and Dust Cove	r



USB Color Digital Microscope Camera Systems

Microscope cameras produce high-definition live images and video for

documentation of clinical, life sciences, and material science applications

- Cameras feature still and video capture modes, automatic / manual exposure control, manual gamma control, and automatic / manual white balance control
- No separate power cable is required; video, power, and full camera control are all enabled through a single USB cable
- The imaging software allows the user to control all of the advanced settings and has a simple but powerful graphic interface
- Software requires: Windows 7 or later, Intel i5 or later, 8 GB of RAM, and USB 2.0 port

			-111, unu 000 2.0			
Specifications	2 Megapixels	5 Megapixels	12 Megapixels			
Image Sensor	1/2.9" CMOS	1/2.8" CMOS	1/2.3" CMOS			
Pixel Size	2.8µm x 2.8µm	2.0µm x 2.0µm	1.3µm x 1.3µm			
Active Pixels	1920 x 1080	2560 x 1920	4000 x 3000			
Frame Rate	30 fps	22 fps	15 fps			
Capture Mode	Still and Video Color					
Exposure	Automatic / Manual					
White Balance	Automatic / Manual					
Gamma	Manual					
Specialized Mode	Fluorescence					
Interface	USB 2.0					
Lens Mount	C Mount					
Adapter Lens	0.45X					
Adapters (included)	23 mm, 30 mm, 30.5 mm					
Power	USB 2.0, 12 W					
Dimensions (L x W x H)	68 x 68 x 46 mm					
Weight	0.33 kg					
Supplied With	Adapters and USB cable					

Item No.	Camera Type	For Microscope Models
1300-CDPC-2	USB Digital Camera, 2 Megapixels	1220CM, 1300-Series, 1400-Series
1300-CDPC-5	USB Digital Camera, 5 Megapixels	1220CM, 1300-Series, 1400-Series
1300-CDPC-12	USB Digital Camera, 12 Megapixels	1220CM, 1300-Series, 1400-Series
M1397-0004-1	USB Digital Camera, 2 Megapixels	1353SL
M1397-0005-1	USB Digital Camera, 5 Megapixels	1353SL
M1397-0006-1	USB Digital Camera, 12 Megapixels	1353SL



Tel: (866) 433-6682



100-Place Premium Plus Slide Box

Modern design for maximum functionality

Optimal Organization

- Organize by "project" and "date" molded in on lid
- Inventory card index corresponds to slide numbers and is removable for trouble-free writing on flat surface
- Vibrant translucent colors are easy to identify and enable coding options

Functional Design

- Flexible storage, store vertically or horizontally to efficiently use space
- Molded feet allow secure horizontal stacking of multiple units
- Unique side storage can accommodate a pen, desiccant or other small items needed for working
- Hinged lid smoothly opens 180° sitting flat on surfaces and prevents misplacement

Safe & Secure

- EVA foam lines the bottom of the box helping to hold slides securely in place and protect against damage
- Stylish wave surface texture is easy to hold for safe sample transport

US Patent No.D904026

Item No.	Color	Item No.	Color	
120576	Blue	120579	Red	
120577	Orange 📕	120592	Purple	
120578	Green	120593	Assorted*	

Lining	Lock	L x W x H in	L x W x H cm
EVA Foam	Sliding Latch	8.2 x 7.7 x 1.3	20.7 x 19.5 x 3.2

Replacement li	Pack of 10	
Item No.	L x H in	L x H cm
120618	8.5 x 11	21.6 x 28

Premium Microscope Slide Boxes

Slide boxes are perfect for storage or transportation of standard size slides (76 x 26 mm and 3 x 1 in)

Organize & Identify

- Lining and slots are numbered to correspond to the ABS plastic boxes available with either slide inventory sheet
- Organize by "Project" and "Date" with pre-molded labeling area
- Available in multiple colors for project coding

Durable & Safe

- cork or foam lining
- Designed to securely store slides in grooved slots
- Molded feet secure stacking for easy transport and storage



U.S. Patent No. D904,027

25-Place Slide Box

Easily access slides with friction-fit cover



Item No.	Color	Lining	Lock	L x W x H in	L x W x H cm
HS15989A	Blue				
HS15989B	Green	Corle	Friction Fit	E C V O E V 1 A	141 0 0 0 0 0 5
HS15989C	Red	Cork	Friction Fit	5.6 x 3.5 x 1.4	14.1 x 8.8 x 3.5
HS15989E	White				
HS15989M	Blue				
HS15989P	Red	Foam	Friction Fit	5.6 x 3.5 x 1.4	14.1 x 8.8 x 3.5
HS15989R	White				

50-Place Slide Box

Thumb-latch lock mechanism



Item No.	Color	Lining	Lock	L x W x H in	L x W x H cm
HS15996A	Blue				
HS15996B	Red	Cork	Thumb-Latch	8.2 x 3.4 x 1.4	20.8 x 8.6 x 3.5
HS15996C	White				

100-Place Slide Box

Closes securely with a rust-resistant nickelplated clasp and pin hinges



Item No.	Color		Lining	Lock	L x W x H in	L x W x H cm
HS15994A	Blue					
HS15994B	Green					
HS15994C	Red		Cork	Nickel-plated Clasp	8.2 x 6.9 x 1.3	20.8 x 17.5 x 3.4
HS15994D	Yellow					
HS15994E	White					
HS15994F	Grey					
HS15994G	Black					
HS15994M	Blue			Mistal adated	8.2 x 6.9 x 1.3	
HS15994P	Red		Foam	Nickel-plated		20.8 x 17.5 x 3.4
HS15994R	White			Clasp		

100-Place Tall Slide Box

Additional height for 3 x 2 in slides Stackable with 100-Place Premium Slide Boxes



Item No.	Color	Lining	Lock	L x W x H in	L x W x H cm
HS15979A	Blue	Cork	Nickel-plated Clasp	8.2 x 6.9 x 2.4	20.8 x 17.5 x 6

Tel: (866) 433-6682



Storage Rack for Microscope Slide Boxes

Create a file system for 50-Place and 100-Place slide boxes

Storage rack makes organization of samples easy

- Clear acrylic construction allows the labels to be seen on the slide boxes
- Place boxes in rows or columns by color to create an easy coding system

Item No.	Color	Capacity	L x W x H in	L x W x H cm
HS159890B	Clear	15 Bins	28 x 6.7 x 9	71.1 x 17.1 x 22.8

Standard Microscope Slide Boxes

Constructed of durable polypropylene



Slide boxes hold either 25 or 100 standard slides (76 x 26 mm and 3 x 1 in)

Improved Identification

- Molded slot numbers correspond directly to the slide inventory card
- Organize with "Project" and "Date" pre-molded labeling area

Secure & Stackable

- Hinged lids are held securely closed with a latch lock
- Molded feet secure stacking for easy transport and storage

25-Place Slide Box

Item No.	Color		Lining	Lock	L x W x H in (cm)
HS15990A	Blue				5.6 x 3.6 x 1.2
HS15990B	Red		None	Latch Lock	
HS15990C	White				(14.1 x 9.2 x 3)
100740	25-Place Replacement Inventory Card, Pack of 10			5.3 x 3.1	
120740				(13.4 x 8)	

100-Place Slide Box

Item No.	Color	Lining	Lock	L x W x H in (cm)
HS15991A	Blue	- None		8.3 x 6.7 x 1.5
HS15991B	Red	- None	Latch Lock	(21 x 16.9 x 3.7)
HS15991C	White			(21 x 10.9 x 3.7)
120741	100-Place Replacement Inventory Card, Pack of 10			3.9 x 6.1
120/41				(10 x 15.5)

Tel: (866) 433-6682

Low Temperature Microscope Slide Boxes

Store in ultra-low temperatures with confidence



Holds standard slides (76 x 26 mm and 3 x 1 in)

Durable Construction

- Made of polycarbonate to store in ultra-low temperatures
- Uniform grooved slide slots separate slides preventing slide contact
- Molded feet enable secure stacking for easy transport and storage

Durable Construction

- Low temperature resistant numbered foam lining corresponds with identification sheet
- Organize with "Project" and "Date" pre-molded labeling area



www.novatech-usa.com

Low Temperature Microscope Slide Boxes

Item No.	Color		Capacity	Lock	L x W x H in (cm)
120316	Blue	•	25-Place	Friction Fit	5.6 x 3.5 x 1.4 (14.1 x 8.8 x 3.5)
HS15988H	Purple	•	100-Place	Stainless Steel Clasp	8.2 x 6.9 x 1.3 (20.8 x 17.5 x 3.4)





Slide Tray Clasps

Effortlessly locate, retrieve and keep slide folders organized

- Assorted color clasps are ideal for color coding identification and to keep slide folder flaps securely closed
- Clasps can be labeled with a permanent marker or a label can be attached

Cardboard Slide Tray

Cardboard slide trays hold standard slides (76 x 26 mm and 3 x 1 in)

Cardboard slide folders offer a convenient solution for safely working, transporting and short-term storing of slides

Organize & Protect

- Index on the front cover corresponds with the number grid inside for identification
- Recessed slide compartments and inside covers for specimen protection
- Slides cannot be accessed when cover is closed reducing contamination

Sturdy Construction

- Compartment holder is made from a double layer of densely pressed cardboard
- Cover is single layer cardboard
- Front protection flaps are attached with durable tape

Item No.	Color	Caj	pacity	L x W x in	H	L x W cm	хH
HS9902	Black						
HS9913	Blue						
HS9914	Green	20-	-Place	8.2 x 13	3.4 x 0.4	20.8 >	34.1 x 0.9
120196	Red						
120197	Yellow						
HS9930	Black	3 0-	-Place	8.2 x 12	2.9 x 0.4	20.8 >	32.8 x 1

Slide Tray Clasps Pack of 10					
Item No.	Color	L x W x H in	L x W x H cm		
120653	Assorted* 🗌 🔳 🔳 📕	<u> </u>	5.6 x 4.4 x 1.6		
120654	Clear	2.2 X 1.7 X 0.0	J.U X 4.4 X 1.0		

*Assorted colors (Clear, Grey, Blue, Green, Red)



Have a Question?

Our experienced and responsive CUSTOMER SERVICE and TECHNICAL SUPPORT teams are ready and available to help.



PHONE: +1.847.816.5070 +44 (0) 845.450.7316



EMAIL: info@heatsci.com

Tel: (866) 433-6682

www.novatech-usa.com

Slide Mailers

Safe and secure transport of standard microscope slides (76 x 26 mm and 3 x 1 in)

Cardboard Slide Mailers

Plastic Slide Mailers

Color

Item No.

_

Item No.	Color	Capacity	UOM	L x W x H in	L x W x H mm
HS9903	Natural	1-Place	Pack of 25	3.7 x 1.7 x 0.2	95 x 42 x 5
HS9904	Natural	2-Place	Pack of 36	4.1 x 3.1 x 0.2	103 x 79 x 5
120557	White	4-Place	Pack of 20	4.7 x 5.7 x 0.3	120 x 140 x 6

UOM

UOM

Pack of 25

enables color coding

- Heavy cardboard mailers for safe transport

Cover that opens for viewing and thumb grooves for easy slide removal

- Securely holds slides with or without cover glass

- Flat surface area is ideal for labeling or writing necessary information

LxWxH

in

LxWxH

тт

120556	Natural	1-Place	Pack of 50	3.3 x 1.6 x 0.2
HS15983B	Natural			
HS15983A	Assorted*	2-Place	Pack of 25	3.7 x 2.7 x 0.2
				*Assorted colors (Blue

Capacity


Capacity

5-Place

5-Place

Polypropylene protectors ideal for secure - Variety of colors brings some fun to the lab and shipping and storing of slides

Large, easy-to-secure snaps, provide safe storage for valuable slides



LxWxH

1.7 x 0.9 x 3.5

*Assorted colors (Blue, Purple, Red, Orange, Yellow)

LxWxH

1-Place

- Polypropylene containers ideal for secure shipping, storing or staining slides Polypropylene containers hold five standard

slides (76 x 26 mm and 3 x 1 in)

Plastic 5-Place Slide Mailers

Color

Natural

Assorted*

Natural

Item No.

HS15982

HS15983G

HS15986

- Inside wall features slotted channels to keep slides separated and to make removal easier
- Lid closes securely to keep slides safe

Side Opening

HS15982

www.novatech-usa.com

End Opening HS15986 & HS15983G





Slide Holders

Hold slides during evaluation, cleaning and drying

- Made from chemical-resistant polyethylene making the unit resist stains and easy to clean
- Solid, strong construction with rubber feet for benchtop stability
- Angled slide holder slots allow easy access to individual slides and viewing of slide labels

Item No.	Color	Capacity	L x W x H in	L x W x H cm
HS15981A	Natural	40-Place	11.7 x 4.1 x 0.9	29.8 x 10.5 x 2.4
HS15981B	Natural	78-Place	11.8 x 7 x 0.8	29.9 x 17.8 x 2.1
HS15981C	Natural	15-Place	6 x 4 x 0.8	15.3 x 10.2 x 2.1



8-Slide Staining Tray Set

Reduce possible cross-contamination and messy work areas

This rugged staining tray is an economical alternative to metal versions

- Made from a polypropylene and polyethylene blend for stability
- Stain, rinse, and dry slides on a single working tray
- A clean and fresh working surface area every time
- Up to eight slides fit comfortably onto the base and the deep well holds up to 38 mL
- Compact size and recessed handles for easy transport from work area to sink
- Pack includes 4 trays and 1 lid

8-Place Slide Staining Tray

Item No.	Color	Capacity	L x W x H in	L x W x H cm
HS15951A	Black 🔳	8-Place	12 x 5 x 1.2	30.5 x 12.7 x 3

18-Place Slide Staining Tray Set

Ideal for Clinical and Research laboratory staining

Tray holds standard microscope slides (76 x 26 mm) securely in place for staining, rinsing and drying applications

Robust design

- Durably constructed from solvent resistant polypropylene blend _
- Non-skid Silicone feet keep tray in place _

Convenient to use

- Two ways to empty stain liquid
 - Pour spouts on each corner
 - Drain hole with plug
- Equipped with handle cut-outs for easy handling

Versatile for multiple testing formats

- Black lid included for light sensitive applications _
- Humidity retention wells for specialized staining needs

Dark Lid protects slides for light-

Convenient Pour Spouts



for guick disposal of liguid waste

18-Place Slide Staining Trav

Item No.	Color	Capacity	L x W x H in	L x W x H cm			
120879	Black	18-Place	16.1 x 8.9 x 1.6 in	41 x 22.5 x 4 cm			

Safety Products & Dispensers

Protect and comply with our range of safety products and PPE dispensing solutions



Wash Bottles Biohazard Containment PPE Dispensers & Holders

Tel: (866) 433-6682

www.novatech-usa.com

Wash Bottles Color-Coded

Color-coded for easy identification

The closure and stem are molded in one piece to make them leak-proof

The angled neck and tip provide a uniform stream of liquid and the tip can be cut back if required to increase the flow

closure

- Wide bottle mouth makes filling easier Bottle is made from LDPE, with a PP
- Color-coding for user, application or location identification

		Pack of 6
Item No.	Cap/Lid Color	Capacity
120245	White 🗌	
120246	Red	
120247	Yellow	500 mL
120248	Green	
120249	Blue	



Create a safer working surface with our reusable Silicone Lab Mats

- Anti-skid to keep glassware in place
- Protect counter tops from stain, spills and wear
- Available in multiple colors and sizes



Lab Mats, Page 49

Tel: (866) 433-6682

Wash Bottles Safety Labeled and Self Venting

Clear and informative product safety information

The information provided on the front of each bottle is specific to the product contained and includes the following — the Chemical Abstract Service (CAS) No., National Fire Protection Association (NFPA) codes and symbols, Protective Equipment Symbol (PES), Target Organ Information and Hazard Codes

There is also the option of using other liquids within the bottles and creating the appropriate safety information on the outside of the bottle by using the self-labeling versions

The closure and stem are molded in one piece to make them leak-proof, the angled neck and tip provide a uniform stream of liquid and the tip can be cut back to increase the flow

- Wide bottle mouth makes filling easier
- Sodium Hypochlorite bottle made from natural LDPE for light protection and has a HDPE closure
- All other bottles are made from LDPE, with a PP closure
- Non-metallic vent that prevents the risk of solvent leakage
- Six named chemicals, a self-labeling ** and assorted pack of bottles to choose from

			Pack of 6
Item No.	Cap/Lid Color	Description	Capacity
120250	Red 📕	Acetone	
120251	Clear	Distilled Water	
120252	Yellow	Isopropanol	
120253	White	Ethanol	500 mL
120254	Green	Methanol	500 IIIL
120255	Blue	Sodium Hypochlorite	
120256	White	Self-labeling**	
120257	Assorted*	Assorted*	

* Assorted Pack includes one of each: acetone, distilled water, isopropanol, ethanol, sodium hypochlorite & a self-labeling bottle


**Self-labeling bottles must only be used with chemicals that are safe and compatible with LDPE. Labeling stickers included



LevGo[®] smartSlicer[®] Disp. Gel Cutter & Safety Razor

Say no to dangerous sharps

- At just 0.27 mm the US Patent Pending product is as thin as a single edge industrial razor blade, but much safer
- Cleanly slice agarose gels right on the light box without scratching the surface
- Ideal for cutting soft tissue and plant matter
- Adjust the size required by simply cutting with scissors
- Made from food grade PET

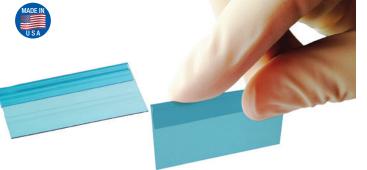

Pack of 100

L x W x H in	L x W x H mm
0.8 x 1.5 x 0.01	19 x 38 x 0.3
1 x 2 x 0.01	25 x 50 x 0.3
	<i>in</i> 0.8 x 1.5 x 0.01

Safely seal PP and PE bags, sheets or flat tubing with our Heat Sealer

- Heating element measures 31 cm long and is only hot when sealing
- Remove excess material safe with integrated sliding blade



Heat Sealer with Cutter, Page 159



Stabilize vessels and labware on the bench or in water baths

- Vinyl-coated lead rings will not mark or scratch benchtops and labware
- C-shape format allows some manual size variation for a customized fit

Item No.	Shape	Color	Flask Sizes	ID in	ID cm	OD in	OD cm	Weight g
HS8881A	С	Blue	125-500	1.9	4.2	3	7.5	215
HS8882A	0	Diue	125-500	1.9	4.8	3	7.7	210
HS8881B	С	Blue	250-1000	2	5.1	3.5	9	465
HS8882B	0	Diue	250-1000	2	5.1	3.5	9	490
HS8881C	С	Blue	500-2000	2.1	5.4	3.9	9.8	595
HS8882C	0	Diue	500-2000	2.2	5.7	3.9	9.8	610
HS8881D	С		1000 4000	2.6	6.6	4.4	11.3	890
HS8882D	0	Blue	1000–4000	2.8	7	4.5	11.5	935

*Weights may vary by +/- 3%

Safety Bottle Carrier

- Handle swings down to either side for easier loading and unloading
- Carriers come in four colors with designated labeling areas for easy identification



Tel: (866) 433-6682

Biohazard Disposal Bags

For personal or general lab use, sizes to suit all needs

- Polypropylene
- A range of biohazard collection bags printed with biohazard warning symbol and precautions in English, Spanish and French

- Includes an indicator patch that darkens when autoclaved



Biohazard Disposal Bags

Item No.	Color		Thickness mil	Capacity	Packaging	L x W in	L x W cm
HS10320		Red 📕 1.6		2 L	500	8 x 12	20.3 x 30.5
HS10321	 Dod			9 L	200	14 x 19	35.6 x 48.3
HS10322	- Red		19 L	200	19 x 23	48.3 x 58.4	
HS10323	_			40 L	200	25 x 33	63.5 x 83.8



HDPE Coated Steel Wire Bag Holder

Item No.	LxWxH LxWxH in cm
HS10044H	3.6 x 5 x 8.4 9.1 x 12.8 x 21.3
	*Holda Piahazard Diapagal Pag UC10200

*Holds Biohazard Disposal Bag HS10320

items



Autoclavable Disposal Bags

Clear bags imprinted with blue biohazard labeling designed for safe disposal

- Constructed of 2 mil thick polypropylene, Front write-on panel allowing for repeated autoclaving - Strong side seams for securely holding

 - 4 inner packs of 50 bags

121°

Case of 200

Item No.	Color	Capacity	L x W in	L x W cm
HS1002A		14 L	12.2 x 26	31 x 66
HS1002B	Clear	26 L	16.3 x 23.6	41.5 x 60
HS1002C		69 L	24 x 31.9	62 x 81

Sharps Containers

Easy to use and transport

- Clearly labeled with the Biohazard warning on one side
- Provides safe disposal of syringes, needles and other small sharps
- _ Stackable to reduce storage space before use
- 1 L Capacity (quart) with a clear lid to view fill level
- Slide access lid provides temporary and final closures for safety and security
- Built-in needle removal port, prevents direct contact with sharps
- Compatible with the Droplet blood collection tray, Totemax® and blood collection tray, Pages 63 and 64

Item No.	Color	L x W x H in	L x W x H cm
120177	Red	4.5 x 4.5 x 7.5	11.5 x 11.5 x 19.2
120178	Yellow	4.5 X 4.5 X 7.5	11.5 X 11.5 X 19.2



PPE Dispensers & Holders

Soft Cover Dispenser

Store and dispense with ease

Translucent acrylic dispensers provide easy access to safety accessories

- Hinged lid protects contents from dust and debris
- Set on counter or wall mount (screws included)
- Great for holding other personal items



Item No.	Color	L x W x D in	L x W x D cm
HS1040C	Clear 🗌	8 x 8 x 16	20.3 x 20.3 x 40.6



Earplug Dispenser

Translucent acrylic dispensers provide easy access to safety accessories

- Holds approximately 200 pairs of foam earplugs
- Set on counter or wall mount (screws included)



Item No.	Color	L x W x in	D L x W x D cm
HS1040B	Neon Green	8 x 8 x 1	16 20.3 x 20.3 x 40.6

3-in-1 Dispenser

Three separate lift-up lids make loading and dispensing supplies easy

Three-compartment dispenser can be used to organize safety glasses, earplugs, soft covers (including bouffant caps, beard covers, shoe covers) or any small items that need to be kept within reach

The unit includes screws for wall mounting or can be set on a counter

- Middle compartment has reach-in hole for dispensing
- Durable acrylic is see-through so product levels are always visible

Item No.	Color	L x W x D in	L x W x D cm
HS1042	Grey 🛛	16 x 16 x 8	40.6 x 40.6 x 20.3





Ergonomically angled for easy dispensing

Translucent acrylic dispensers provide easy access to safety accessories

- Hinged lid protects glasses from dust and debris
- Set on counter or wall mount (screws included)
- Large dispenser holds approx. 20 glasses, small approx. 10 glasses
- Great for holding other personal items

Item No.	Color	L x W x D in	L x W x D cm
HS1041	Neon Blue	8 x 6 x 6	20.3 x 15.2 x 15.2
HS1040A	Neon Blue	8 x 8 x 16	20.3 x 20.3 x 40.6



PPE Dispensers & Holders



Workstation Storage Bin

The essential combination accessory holder

- Organize your most commonly used laboratory disposables in one central location
- Acrylic unit has room to store gloves, Kimwipes® and Parafilm® M
- Use bins to store tubes, tips, etc.

Item No.	Color	L x W x H in	L x W x H cm
HS234523	Clear	10.4 x 5.4 x 17.3	26.5 x 13.7 x 44
		Parafilm® is a regis	stered trademark of Amcor Limited
		Kimwipes® is a regis	stered trademark of Kimberly-Clark





Lab Wipe Holders

5

Holds Kimwipes[®] and other major brands

Clear acrylic holders fit boxes of small or large lab wipes

- The smaller version attaches with double-sided adhesive tape and the larger version with screws
- Mount on a shelf or wall
- _ Mounting materials included

ltem No.	Description	Color	L x W x H in (cm)
HS234521	Small Holder	Clear	4.6 x 4.8 x 3.3 (11.8 x 12.2 x 8.4)
HS234522	Large Holder	Clear 🗌	12.6 x 5 x 3.8 (32 x 12.7 x 9.7)

Kimwipes® is a registered trademark of Kimberly-Clark

Benchtop Dispensing Bins

Work great with gloved hands, bright colors

Ergonomically designed with large, angled openings and oversized lip

- Lid remains open when tilted back
- Nonskid rubber feet and pre-drilled holes for wall mounting
- Green bin includes a removable divider
- Mounting screws included

Item No.	Color	Compartments	L x W x H in	L x W x H cm
HS23411	Neon Green 🔳	2	7.1 x 6.1 x 6.5	18 x 15.5 x 16.5
HS23412	Neon Blue	1	6.1 x 6.1 x 6.7	15.5 x 15.5 x 17



Clear Acrylic Glove Box Holders

Keep gloves organized & ready for immediate use

- Free up bench-top space by mounting holders on wall for easy dispensing of gloves
- Universal fit for most major brands of glove boxes _
- Mounting screws included
- Includes a polyester foam insert to securely hold a range of glove box sizes—snug fit ensures easy removal of gloves from the box

Item No.	Capacity	L x W x H in	L x W x H cm
HS23471A	1	10.3 x 5.9 x 4.5	26.3 x 14.6 x 11.4
HS23471B	2	11.4 x 10.3 x 4.5	29.2 x 26 x 11.4
HS23471C	3	11.6 x 15.2 x 4.3	29.4 x 38.8 x 11.6





HDPE Coated Wire Glove Box Holders

Keep gloves organized & ready for immediate use

- -HDPE-coated steel wire racks are an economical solution
- Free up bench-top space by mounting holders on wall for easy dispensing of gloves _
- Universal fit for most major brands of glove boxes _

_ Mounting screws included

Item No.	Capacity	L x W x H in	L x W x H cm
HS23457	1	5.5 x 8.2 x 4.3	14 x 20.9 x 10.8
HS23458	3	9.8 x 17.9 x 4.3	25 x 45.4 x 10.8

Modular Glove Box Holders

Available infused with Microban® for anti-microbial protection

The anti-microbial version (blue) is ideal for use in clean rooms, hospitals, and microbiological work areas. The additive prevents growth of molds and bacteria

- High-impact, durable resin is resistant to harsh cleaning solutions

_

- Universal fit for most major brands of glove boxes
- Modular design allows single boxes or horizontal stacking for multiple box holders
- Mounting screws included

			US Patent No.	6669157 Pack of 3
Item No.	Description	Color	L x W x H in	L x W x H cm
120258	Standard	White	— 10 x 6.1 x 3.8	25.4 x 15.6 x 9.7
HS23491A	Anti-microbial	Blue		20.4 X 10.0 X 9.7





Delivery

We stock our warehouse to ensure product availability and on-time delivery.

By offering low minimum order quantities, we help dealers efficiently maintain lower stocking levels.



Tel: (866) 433-6682



Sample protection and identification for a wide range of tubes and vials




Heat Sealer Parafilm® & Dispensers Films, Tapes & Foils Labels

Tel: (866) 433-6682

www.novatech-usa.com

Sealing & Labeling

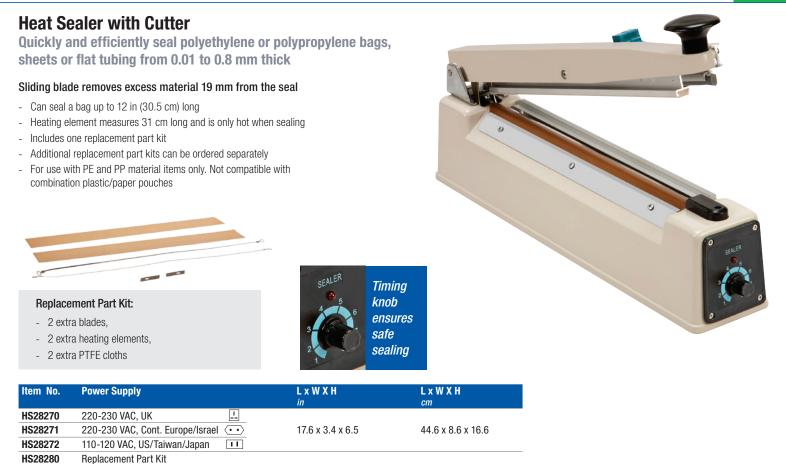

Parafilm[®] M Sealing Film

Protect the integrity of your laboratory and research applications

Parafilm[®] M is a semi-transparent, flexible, thermoplastic film with two-way stretch

- Protect the integrity of research applications with a tight moisture-barrier that holds a strong seal and doesn't release from glassware, despite off-gassing
- Reduce the risk of tampered data with a covering that is odorless, colorless and semi-transparent
- Prevents moisture and volume loss due to material composition and tight seal
- Flexible and self-sealing material allows it to cling around irregular shapes and surfaces
- Stretches more than 200% of original length
- Resistant up to 48 hours against many polar substances such as saline solutions, inorganic acids and alkaline solutions
- Two color options available in 2" rolls (natural and purple) for color coding purposes



Item No.	Color	Film Wid	lth	Roll Leng	th
		in	ст	ft	т
HS234526A	Natural	2	5	250	76.2
120762	Purple	2	5	250	76.2
HS234526B	Natural	4	10	125	38.1
HS234526C	Natural	4	10	250	76.2
120265	Natural	20	50.8	50	15.2

Parafilm® M is a registered trademark of Amcor Limited

Box Top Dispenser for Parafilm® M Sealing Film

Easy application

Simply place the dispenser on top of the Parafilm[®] M box and pull the sealing film through, there is no need to remove rolls from the packaging

- Accommodates two 50 mm or one 100 mm Parafilm® M rolls
- Built in safety blade slides and cuts with no danger to fingertips and eliminates the need for scissors
- Supplied with two safety blades, additional replacement blades are available for purchase
- Made with ABS plastic making the unit easy to clean

Item No.			L x W x H in	L x W x H cm
120667	Blue			
120668	Purple		4.9 x 6.8 x 3.9	12.3 x 17.2 x 9.9
120758	Natural			
Item No.				
120722	Re	eplacement I	Blades for Box Top Disper	nser, Pack of 3

Parafilm® M is a registered trademark of Amcor Limited





ABS Dispenser for Parafilm® M Sealing Film

Store, dispense, and cut Parafilm[®] M, tape, labels, and Tough-Tags[®]

- ABS plastic dispenser designed with integrated safety razor that slides smoothly creating a clean cut
- Supplied with two safety blades, additional replacement blades are available for purchase
- Dispenser holds one or two 50 mm (2-inch) rolls or one 100 mm (4-inch) roll

Item No.		L x W x H in	L x W x H cm
HS234525B	Blue	- 4.7 x 6.1 x 6.7	12 x 15.6 x 17.1
HS234525C	Green	- 4.7 X 0.1 X 0.7	12 X 13.0 X 17.1

Item No.

HS234525R Replacement Blades for ABS Dispenser, *Pack of 5*

Parafilm[®] M is a registered trademark of Amcor Limited Tough-Tags[®] is a registered trademark of Diversified Biotech

Acrylic Dispenser for Parafilm® M Sealing Film

Store, dispense, and cut Parafilm® M, tape, labels, and Tough-Tags®

- Strong, crystal-clear acrylic dispenser makes your film supply visible and features a serrated cutting blade
- Rubber feet secures in place while cutting
- Dispenser holds one or two 50 mm (2-inch) rolls or one 100 mm (4-inch) roll

Item No.	L x W x H	L x W x H
	in	ст
HS234524	4.7 x 6.6 x 6.9	11.9 x 16.8 x 17.5
	Pa	arafilm® M is a registered trademark of Amcor Limited

Tough-Tags[®] is a registered trademark of Diversified Biotech



PetriSEAL[™] and ContainerSEAL[™]

Sealing tape for petri dishes, microplates, lids and caps

- Tape stretches, conforms and seals to irregular perimeters
- Seal remains flexible even with intermittent exposure to 100°C
- Waterproof and chemically resistant to most solvent and caustic agents

PetriSEAL™

Item No.	Color	Film Width in	ст	Roll Length ft	т
HEAPSEAL-108B	Blue				
HEAPSEAL-108C	Clear				
HEAPSEAL-108R	Red	0.5	1.3	108	33
HEAPSEAL-108Y	Yellow				
HEAPSEAL-108W	White				







ContainerSEAL™

Item No.	Color/Size	Film Wie in	d th <i>cm</i>	Roll Leng ft	jth <i>m</i>
HEACSEAL-75R	Red				
HEACSEAL-75W	White	0.8	1.9	108	33
HEACSEAL-75Y	Yellow				
HEACSEAL-XLR	Red XL				
HEACSEAL-XLW	White XL	1	2.5	108	33
HEACSEAL-XLY	Yellow XL				

PetriSeal[™] and ContainerSeal[™] are trademarks of Diversified Biotech, Inc



Foil Rolls

Designed for easy use and minimal waste

- Two sizes available for covering small surface such as beakers, flasks, tubes and Petri dishes
- Withstands autoclaving, incubating and freezing temperatures

ltem No.	Thickness mm	Roll Width in	ст	Roll Length ft	т
HS23534A	0.015	4	10.2	500	152.4
HS23536A	0.015	6	15.3	500	152.4

Cryo-Babies® and Cryo-Tags® **Low Temperature Labels** For secure uncompromised labeling CRYO-BABIES **CRYO-BABIES** CRYO-BABIES CRYO-BABIES" CRYO-BABIES - Chemically inert - Adheres to most plastics (100% virgin PP tubes recommended), glass and metals without cracking, peeling or degrading - Flexible polyolefin material and acrylic adhesive expand and contract with temperature fluctuations -196° C AUTOCLAVABLE

Cryo-Babies® on a Ro	II		
Ideal Use	0.5 mL Tubes	1.5 mL Tubes	General Purpose
	LABEL	LABEL	LABEL
Label Dimensions	0.94 x 0.50 in (24 x 13 mm)	1.28 x 0.50 in (33 x 13 mm)	1.50 x 0.75 in (38 x 19 mm)
UOM	1,000/roll	1,000/roll	1,000/roll
Item No.			
White	HEACRY-0500	HEACRY-1000	HEACRY-2000
Blue	-	HEACRY-1000-B	HEACRY-2000-B
Green	-	HEACRY-1000-G	HEACRY-2000-G
Orange	-	HEACRY-1000-0	HEACRY-2000-0
Red	-	HEACRY-1000-R	HEACRY-2000-R
Yellow	-	HEACRY-1000-Y	HEACRY-2000-Y

Cryo-Babies® and Cryo-Tags® are registered trademarks of Diversified Biotech, Inc

For write-on labels, see our selection of Sharpie® Pens



Dual-tip & Standard Fine Tip Sharpie® Pens, Page 50

Cryo-Babies[®] and Cryo-Tags[®] Low Temperature Labels

For secure uncompromised labeling

- Chemically inert
- Adheres to most plastics (100% virgin PP tubes recommended), glass and metals without cracking, peeling or degrading
- Flexible polyolefin material and acrylic adhesive expand and contract with temperature fluctuations





Laser Cryo-Tags® and Cryo-Babies® on Sheets formatted for laser printers

Ideal Use	0.5 mL Tubes	1.5 mL Tubes	1.5 mL Tubes	Cryogenic Vials	Bottles & Beakers	Microplates
Label Dimensions	0.94 x 0.50 in (24 x 13 mm)	1.28 x 0.50 in (33 x 13 mm)	1.28 x 0.50 in (33 x 13 mm)	1.69 x 0.75 in (43 x 19 mm)	3.0 x 2.0 in (76 x 51 mm)	1.50 x 0.25 in (38 x 6 mm)
Labels/Sheet	119	51	85	52	12	156
Labels/pk	2,380	1,020	1,700	1,040	240	3,120
UOM	20/pk	20/pk	20/pk	20/pk	20/pk	20/pk
Item No.						
White	HEALCRY-2380	HEAMINI-1700	HEALCRY-1700	HEALCRY-1100	HEALCRY-3020	HEASIDE-1000
Blue	HEALCRY-2380-B	-	HEALCRY-1700-B	HEALCRY-1100-B	-	HEASIDE-1100
Green	HEALCRY-2380-G	-	HEALCRY-1700-G	HEALCRY-1100-G	-	HEASIDE-1200
Orange	HEALCRY-2380-0	-	HEALCRY-1700-0	HEALCRY-1100-0	-	HEASIDE-1300
Red	HEALCRY-1380-R	-	HEALCRY-1700-R	HEALCRY-1100-R	-	HEASIDE-1400
Yellow	HEALCRY-1380-Y	-	HEALCRY-1700-Y	HEALCRY-1100-Y	HEALCRY-3020-Y	HEASIDE-1500
Rainbow*	HEARNBW-2300	-	HEARNBW-2200	HEARNBW-2000	-	HEARNBW-2400

Laser Cryo-Tags® and Cryo-Babies® on Sheets formatted for laser printers - continued

Ideal Use	Microscope Slides	Racks & Boxes	Racks & Boxes	Racks & Boxes	General Purpose	General Purpose
Label Dimensions	1.0 x 1.0 in (25 x 25 mm)	2.50 x 0.50 in (64 x 13 mm)	2.625 x 1.0 in (67 x 25 mm)	1.125 x 1.75 in (29 x 45 mm)	8.5 x 11.0 in (216 x 279 mm)	1.50 x 0.75 in (38 x 19 mm)
Labels/Sheet	80	60	30	42	1	60
Labels/pk	1,600	1,200	600	840	20	1,200
UOM	20/pk	20/pk	20/pk	20/pk	20/pk	20/pk
Item No.						
White	HEALCRY-1400	HEALCRY-2500	HEALCRY-1258	HEALCRY-1300	HEALCRY-1000	HEALCRY-1200
Blue	-	-	HEALCRY-1258-B	-	-	HEALCRY-1200-B
Green	-	-	HEALCRY-1258-G	-	-	HEALCRY-1200-G
Orange	-	-	HEALCRY-1258-0	-	-	HEALCRY-1200-0
Red	-	-	HEALCRY-1258-R	-	-	HEALCRY-1200-R
Yellow	-	-	HEALCRY-1258-Y	HEALCRY-1300-Y	-	HEALCRY-1200-Y
Rainbow*	-	-	HEARNBW-2500	-	-	HEARNBW-2100

*Rainbow 4 sheets of each Blue, Green, Orange, Red, Yellow

Cryo-Babies® and Cryo-Tags® are registered trademarks of Diversified Biotech. Inc

Tough-Spots® Tube Labels Pre-cut peel off labels for tube tops

- Adheres to most plastics, glass, and metals without cracking, peeling or degrading
- Flexible polyolefin material and acrylic adhesive

Non the second 11 IOUGH-SPOTS TOUGH-SPOT TOUGH-SPOTS

Tough-Spots® on a Roll

ldeal Use	0.2 mL Tubes	0.5 mL Tubes	1.5/2.0 mL Tubes	1.5/2.0 mL Tubes	15-50 mL Tubes	50 mL Tubes
Label Diameter	0.1875 in/4.8 mm	0.375 in/9.5 mm	0.4375 in/11 mm	0.50 in/13 mm	0.75 in/19 mm	1.0 in/25 mm
UOM	1,500/roll	1,000/roll	1,000/roll	1,000/roll	500/roll	500/roll
Item No.						
White	HEATS-TNY	HEAT-SPOTS	HEATSPOTS-44	HEAT-SPOTS-50	HEATSPOTS-75	HEAT-SPOTS-100
Blue	-	HEAT-SPOTS-B	-	HEAT-SPOTS-50-B	-	-
Coffee	-	HEAT-SPOTS-C	-	HEAT-SPOTS-50-C	-	-
Gold	-	HEAT-SPOTS-D	-	HEAT-SPOTS-50-D	-	-
Green	-	HEAT-SPOTS-G	-	HEAT-SPOTS-50-G	-	-
Lavender	-	HEAT-SPOTS-L	-	HEAT-SPOTS-50-L	-	-
Maroon	-	HEAT-SPOTS-M	-	HEAT-SPOTS-50-M	-	-
Orange	-	HEAT-SPOTS-0	-	HEAT-SPOTS-50-0	-	-
Pink	-	HEAT-SPOTS-P	-	HEAT-SPOTS-50-P	-	-
Red	-	HEAT-SPOTS-R	-	HEAT-SPOTS-50-R	-	-
Silver	-	HEAT-SPOTS-S	-	HEAT-SPOTS-50-S	-	-
Yellow	-	HEAT-SPOTS-Y	-	HEAT-SPOTS-50-Y	-	-





- Label sheets are top coated and heat-resistant to prevent jams in laser printers
- Printer formatting instruction included -



Laser Tough-Spots® on Sheets formatted for laser printers

ldeal Use	0.2 mL Tubes	0.5 mL Tubes	1.5/2.0 mL Tubes	1.5/2.0 mL Tubes	15-50 mL Tubes
abel Diameter abels/sheet abels/pk DM em No. hite ue reen reen range ed	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$				
Label Diameter	0.375 in/9.5 mm	0.4375 in/11 mm	0.50 in/13 mm	0.75 in/19 mm	1.0 in/25 mm
Labels/sheet	192	234	192	108	63
Labels/pk	3,840	4,680	3,840	2,160	1,260
UOM	20/pk	20/pk	20/pk	20/pk	20/pk
item No.					
White	HEASPOT-1000	HEASPOT-5000	HEASPOT-2000	HEASPOT-3000	HEASPOT-4000
Blue	HEASPOT-1100	-	HEASPOT-2100	-	-
Green	HEASPOT-1200	-	HEASPOT-2200	-	-
Orange	HEASPOT-1300	-	HEASPOT-2300	-	-
Red	HEASPOT-1400	-	HEASPOT-2400	-	-
Yellow	HEASPOT-1500	-	HEASPOT-2500	-	-
Rainhow*	HEARNBW-1000	-	HEARNBW-1100	_	-

*Rainbow 4 sheets of each Blue, Green, Orange, Red, Yellow Tough-Spots® is a registered trademarks of Diversified Biotech, Inc

Tel: (866) 433-6682

www.novatech-usa.com

Tough-Tags[®] Tube Labels Pre-cut labels for identification

- Adheres to most plastics, glass, and metals without cracking, peeling or degrading
- Flexible polyolefin material and acrylic adhesive





Tough-Tags® on a Roll

ldeal Use	0.2 mL Tubes	0.5 mL Tubes	1.5/2.0 mL Tubes	General Purpose	Microplates
Label Diameter	0.81 x 0.28 in/21 x 7 mm	0.94 x 0.50 in/24 x 13 mm	1.28 x 0.50 in/33 x 13 mm	1.50 x 0.75 in/38 x 19 mm	1.50 x 0.28 in/38 x 6 mm
UOM	1,500/roll	1,000/roll	1,000/roll	1,000/roll	1,000/roll
Item No.					
White	HEATT-TNY	HEATTSW-1000	HEATTLW-1000	HEATTGP-1000	HEATT-SWALL
Blue	-	HEATTSB-1000	HEATTLB-1000	-	-
Green	-	HEATTSG-1000	HEATTLG-1000	-	-
Orange	-	HEATTSO-1000	HEATTLO-1000	-	-
Red	-	HEATTSR-1000	HEATTLR-1000	-	-
Yellow	-	HEATTSY-1000	HEATTLY-1000	-	-
Clear	-	HEATTSC-1000	HEATTLC-1000	-	-

- Label sheets are top coated and heat-resistant to prevent jams in laser printers
- Printer formatting instruction included _



Tough-Tags® is a registered trademarks of Diversified Biotech, Inc

Laser Tough-Tags® on Sheets formatted for laser printers

ldeal Use	0.5 mL Tubes	1.5/2.0 mL Tubes	General Purpose	Microscope Slides
Label Dimensions	0.94 x 0.50 in/24 x 13 mm	1.28 x 0.50 in/33 x 13 mm	1.50 x 0.75 in/38 x 19 mm	0.94 x 0.94 in/22 x 22 mm
Labels/Sheet	119	85	60	96
Labels/pk	2,975	2,125	1,500	2,400
UOM	25/pk	25/pk	25/pk	25/pk
Item No.				
White	HEATTSW-2240	HEATTLW-2016	HEATTLW-1050	HEAMISL-1000
Blue	HEATTSW-2240-B	HEATTLW-2016-B	HEATTLW-1050-B	HEAMISL-1000-B
Green	HEATTSW-2240-G	HEATTLW-2016-G	HEATTLW-1050-G	HEAMISL-1000-G
Orange	HEATTSW-2240-0	HEATTLW-2016-0	HEATTLW-1050-0	HEAMISL-1000-0
Red	HEATTSW-2240-R	HEATTLW-2016-R	HEATTLW-1050-R	HEAMISL-1000-R
Yellow	HEATTSW-2240-Y	HEATTLW-2016-Y	HEATTLW-1050-Y	HEAMISL-1000-Y
Rainbow*	HEARNBW-3100	HEARNBW-3000	HEARNBW-3200	HEARNBW-3300

Label Station


Organize your labels for easy accessibility

Portable label station holds up to six standard size boxes of Tough-Tags®, Cryo-Babies® and Tough-Spots®

Just drop the box in the label station and feed the paper through the slot

- Acrylic station includes a writing surface, a cutting edge for easy dispensing and non-skid rubber feet
- Counter-sunk holes provided for wall mounting

Item No.	Color	L x W x H in	L x W x H cm
HS23460	Blue	11 x 4.7 x 3.5	28 x 12 x 8.9
		0 0 , ,	abies® and Tough-Spots® arks of Diversified Biotech, Inc.

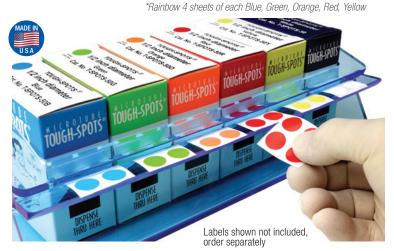

Tel: (866) 433-6682

www.novatech-usa.com

100	Heath I Owscientific.com	
-		
-		

Charts & References



Plastic Material References

Plastic Material References

G Good Resistance: continuous exposure to the substance does not cause damage within 30 days Chemical Resistance of Plastics F Fair Resistance: continuous exposure to the substance causes minor damage within 7-30 days Poor Resistance: not suitable for continuous exposure to the substance. Immediate damage may occur

	LD	PE	HD	PE	Р	P		VIP PX)	P	VC	Р	C	ABS	S/PS	SI	AN	PM	MA	PT	FE	PC	DM
TEMPERATURE °C	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50
Acetaldehyde	G	Р	G	F	F	Р	F	Р	Р	Р	F	Р	Р	Р	Р	Р	Р	Р	G	G	G	G
Acetic Acid (Glacial)	F	Р	G	G	G	F	F	F	G	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Acetic Anhydride	Р	Р	F	F	F	F	G	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Acetone	F	Р	Р	Р	F	Р	G	G	Р	P	P	Р	Р	P	P	P	P	Р	G	G	G	G
Ammonium Chloride (10%)	G	G	G	G	G	G	G	G	G	F	F	F	G	G	G	G	F	F	G	G	•	
Ammonium Hydroxide (30%)	G	G	G	G	G	G	G	G	G	P	P	F	F	F	F	F	F	F	G	G	G	G
Amyl Acetate	F	Р	G	F	F	P	G	F	P P	P	P P	P P	P P	P P	P	P P	G	G	G	G	G F	G
Aniline (Phenylamine) Aqua Regia	G P	F	G P	G P	G P	G P	G P	F	P	P P	P	P	P	P	P F	P	P	P	G G	G G	G	F G
Benzaldehyde	G	F	F	P	P	F	G	F	P	P	P	P	P	P	P	P	P	P	G	G	G	G
Benzene	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	G	G	G	F
Benzoic Acid	G	G	G	G	G	F	G	G	G	F	G	F	F	F	G	G	G	G	G	G	u	
Boric Acid (10%)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G
Butyl Acetate	F	F	F	F	F	F	F	F	G	P	P	P	P	P	P	P	P	P	G	G	G	F
Butyric Acid (Butanoic acid)	Р	Р	F	Р	Р	Р	Р	Р	G	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G		
Calcium Hydroxide (Saturated)	G	G	G	G	G	G	G	G	G	G	Р	Р	F	F	G	G	F	Р	G	G	G	G
Carbon Disulphide	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	G	G
Carbon Tetrachloride	F	Р	F	Р	F	Р	Р	Р	G	Р	Р	Р	Р	Р	F	Р	Р	Р	G	G	F	F
Chloroform	F	Р	F	Р	Р	Р	Р	Р	G	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Citric Acid (1M)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G		G	G		
Cresol	Р	Р	F	Р	F	F	Р	Р	Р	Р	Р	Р	F	Р	Р	Р	Р	Р	G	G		
Cyclohexane	F	Р	F	Р	F	Р	Р	Р	Р	Р	G	F	Р	Р	F	Р	F		G	G	G	G
Dibutyl Phthalate	F	Р	F	Р	F	Р	F	F	Р	Р	F	Р	Р	Р	Р	Р	Р	Р	G	G	G	G
Dichlorobenzene	F	Р	F	Р	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Diethyl Ether	Р	Р	F	Р	F	Р	P	P	G	P	P	P	P	P	P	P	P	Р	G	G	G	G
Diethylene Glycol	G	G	G	G	G	G	G	G	F	P	F	F	G	G	G	G	P	P	G	G	G	G
Dimethyl Formamide (DMF)	G	G	G	G	G	G	G	G	Р	P	P	P	Р	P	P	P	P	P	G	G	G	G
Dimethyl Sulfoxide (DMSO)	G	G	G	G	G	G	G	G	P	P	P	P	D	F	P	P	P	P	G	G	F	-
Dioxane	F	F	F	F	Р	P P	F	F	P P	P P	P	P P	P F	P P	P P	P P	P P	P P	G	G	F	F
Ethyl Acetate (Ethyl Ester) Ethyl Alcohol (Absolute Ethanol)	G G	G F	G G	G G	F G	G	G	F	G	G	G	F	G	F	P	P	P	P	G G	G G	G	G
Ethyl Chloride (Chloroethane)	F	P	P	P	F	P	F	Р	P	P	P	Р	F	Р	P	P	P	Р	G	G	u	u
Ethylene Chloride	F	P	P	P	F	P	F	P	P	P	P	P	F	P	P	P	P	P	G	G	Р	Р
Ethylene Oxide (Pure)	F	F	F	F	F	P	F	P	P	P	F	P	P	P	P	P	G	G	G	G	G	G
Ethylene Oxide (Gas)	F	F	G	G	G	G	F	F	F	F	G	G	G	F	F	F	G	G	G	G		
Formaldehyde (Formalin) 40%	G	F	G	F	G	G	G	G	G	G	G	G	F	F	F	P	G	F	G	G	G	G
Formic Acid (50%)	F	F	G	G	G	F	G	G	G	Р	F	F	F	F	G	F			G	G		
Formic Acid (100%)	F	F	G	G	G	F	G	G	G	Р	F	Р	F	F	Р	Р			G	G	Р	Р
Glycerine (Glycerol)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	F	F
Hexane	Р	Р	F	F	F	F	F	Р	G	Р	F	Р	Р	Р	G	G	G		G	G	G	G
Hydrobromic Acid (69%)	G	G	G	F	G	F	G	G	G	G	F	F	F	F	F	F	Р	Р	G	G	Р	Р
Hydrochloric Acid (5%)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	F		G	G	Р	Р
Hydrochloric Acid (35%)	G	G	G	G	G	F	G	F	G	G	F	Р	G	G	G	F	Р	Р	G	G	Р	Р
Hydrofuoric Acid (48%)	G	G	G	G	G	F	G	F	F	F	F	Р	Р	Р	G	F	Р	Р	G	G	Р	Р
Hydrogen Peroxide (30%)	G	G	G	G	G	F	G	F	G	G	G	G	G	F	G	G	F	P	G	G	G	P
Lactic Acid (85%)	G	G	G	G	G	F	G	F	G	F	G	F	G	G	G	G	G	G	G	G	G	Р
Methyl Acetate	G	Р	G	G	G	F	F	Р	P	P	Р	P	Р	Р	P	P	D	P	G	G	0	
Methyl Alcohol (Methanol)	G P	F	G	G P	G	G	G	F	G	G	F	F	F	F	P P	P	P	P P	G	G	G	G
Methyl Ethyl Ketone (Butanone) Methylene Chloride (Dichloro Methane)	P	P P	P G	P	G G	G P	G	P P	P P	P P	P P	P	P P	P P	P	P P	P P	P	G G	G G	Р	Р
Mineral Oil	F	G	G	G	G	F	G	F	G	G	G	G	G	G	G	G	G	G	G	G	G	G
Nitric Acid (10%)	G	G	F	F	F	F	F	F	F	G	G	F	F	G	F	F	G	a	G	G	P	P
Nitric Acid (70%)	G	P	G	Р	Р	Р	G	Р	Р	P	P	Р	P	P	P	P	P	Р	G	G	P	P
Nitrobenzene	P	P	P	P	P	P	G	P	P	P	P	P	P	P	P	P	P	P	G	G	F	P
Oxalic Acid (10%)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G
Perchloric Acid (70%)	F	P	F	P	F	P	F	P	F	P	P	P	F	F	F	F	G	G	F	F	P	P
Phenol (100%)	P	P	P	P	P	P	G	P	P	P	P	P	P	P	P	P	P	P	G	G	P	P
Phosphoric Acid (85%)	G	P	G	G	G	F	G	F	G	F	G	F	G	F	G	G	F	P	G	G	G	P
	_ ~	•	J	, u	- G	•	, u	· ·				· ·		1 1	- u	, u	'	· •		u.	u u	· ·

	LD	PE	HD	PE	Р	Р		/IP PX)	P۱	/C	Р	C	ABS	/PS	S/	۸N	PM	MA	PT	FE	PC	DM
TEMPERATURE °C	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50	20	50
Picric Acid	Р	Р	Р	Р	Р	Р	G	G	Р	Р	Р	Р	F	F	G	G			G	G		
Potassium Hydroxide (30%)	G	G	G	G	G	G	G	G	G	G	Р	Р	F	F	G	G	G	G	G	G	G	G
Potassium Permanganate	G	G	G	G	G	F	G	G	G	F	G	G	G	F	F	F	F	Р	G	G	F	F
Propylene Glycol	G	G	G	G	G	G	G	G	F	F	F	F	G	G	G	G			G	G	G	G
Pyridine	Р	Р	Р	Р	G	G	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	G	F
Salicylic Acid	G	G	G	G	G	G	G	G	F	F	G	F	G	F	G	F			G	G	Р	Р
Silver Nitrate	G	F	G	G	G	G	G	G	G	F	G	G	G	G	G	F			G	G	F	F
Sodium Hydroxide (50%)	F	F	G	G	G	G	G	G	G	G	Р	Р	G	F	G	F	G	Р	G	G	G	G
Sodium Hypochlorite (15%)	G	F	G	F	F	Р	G	G	G	G	F	F	G	F	G	G	G	G	G	G		
Sulphuric Acid (20%)	G	G	G	G	G	G	G	G	G	F	G	F	G	G	G	F	G	G	G	G		
Sulphuric Acid (60%)	G	F	G	F	F	F	G	F	G	F	F	F	G	F	Р	Р	Р	Р	G	G	Р	Р
Sulphuric Acid (98%)	F	F	F	F	F	G	F	F	F	Р	Р	Р	F	F	Р	Р	Р	Р	G	G	Р	Р
Tetrahydrofuran (THF)	F	Р	F	G	F	F	F	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	F	F
Toluene	F	Р	Р	Р	Р	Р	F	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Trichloroacetic Acid	F	Р	F	Р	F	F	G	G	F	Р	F	Р	F	Р	Р	Р			G	G		
Trichloroethylene	Р	Р	Р	Р	Р	Р	G	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	Р	Р
Turpentine	F	Р	F	Р	F	Р	F	Р	F	F	F	Р	Р	Р	F	Р	F	Р	G	G	G	G
Xylene	Р	Р	F	Р	Р	Р	F	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	Р	G	G	G	G
Zinc Chloride (10%)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	F
Zinc Sulphate (10%)	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	F	Р

Physical Properties of Plastics

	LDPE	HDPE	РР	PMP (TPX)	PC	PS	РММА	PTFE
Max Usage Temp. °C	80	120†	135	145	135	90	50	260
Min Usage Temp. °C	-50	-100	-20‡	-180	-135	-40	-60	-200
Transparency	Translucent	Translucent	Translucent	Clear	Clear	Clear	Clear	Opaque
Flexability	Flexible	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
Specific Gravity	0.92	0.95	0.9	0.83	1.2	1.05	1.2	2.2
Microwavable	Yes	No	Yes	Yes	Marginal	No	No	Yes
Sterilization								
Autoclavable	No	No	Yes	Yes	Yes	No	No	Yes
Gas	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Dry Heat	No	No	No	Yes	No	No	No	Yes
Radiation (Gamma)	Yes	Yes	No	No	Yes	Yes	Yes	Yes
Disinfection	Yes	Yes	Yes	Yes	Yes	Some	Some	Yes

† Polymer may be malleable at temperatures above 80°C if the product is under structural stress

‡ Material may become brittle at low temperatures

Note:

The information provided in the Chemical Resistance of Plastics chart is intended to provide guidelines for reference only. Observe the tolerated temperature ranges of plastic when autoclaving laboratory plasticware. Remove any stoppers, fittings or caps from the plasticware prior to autoclaving. Plastic vessels should be autoclaved separately from their closures and other fittings. Autoclaving vessels with their closures in place can lead to deformation and destruction of the vessels. All statements are advisory only and imply no liability on the part of Heathrow Scientific.

Sterilization:

Autocalving (121°C, 16 psi for 15 minutes)—Clean and rinse items with distilled _ water before autoclaving. (Always completely disengage thread before autoclaving.) Certain chemicals which have no appreciable effect on resins at room temperature may - Radiation—gamma irradiation at 25 kGy (2.5 MRad) with unstabilized plastic. cause deterioration at autoclaving temperatures unless removed with distilled water beforehand.

- Dry heat (160°C, 120 minutes)

- Disinfectants-Benzalkonium chloride, formalin/formaldehyde, ethanol, etc.

Gas-Ethylene Oxide, formaldehyde, hydrogen peroxide.

NOUNTERNATIONAL

sales@novatech-usa.com www.novatech-usa.com Tel: (866) 433-6682 Fa Tel: (281) 359-8538 Fa

Fax: (866) 433-6684 Fax: (281) 359-0084

Heathrow Scientific design | function | innovation